


OIL ANALYSIS REPORT

Sample Rating Trend

VIS DEBRIS

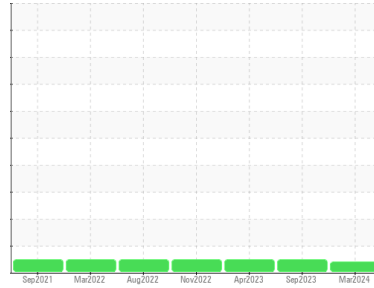

Machine Id
DT782

Component
Front Axle

Fluid
CHEVRON RPM SYNTHETIC GEAR 75W90 (--- GAL)

DIAGNOSIS

Recommendation

We suspect abnormal contamination may be due to sampling method. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Moderate concentration of visible dirt/debris present in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0119987	PCA0104215	PCA0095688
Sample Date	Client Info		13 Mar 2024	13 Sep 2023	17 Apr 2023
Machine Age	mls	Client Info	152205	152205	127621
Oil Age	mls	Client Info	152205	152205	0
Oil Changed	Client Info		N/A	Changed	Not Changed
Sample Status			ABNORMAL	NORMAL	NORMAL

CONTAMINATION	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG

WEAR METALS	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >500	159	156	148
Chromium	ppm	ASTM D5185m >10	1	1	1
Nickel	ppm	ASTM D5185m >10	<1	<1	0
Titanium	ppm	ASTM D5185m	<1	<1	<1
Silver	ppm	ASTM D5185m	0	0	0
Aluminum	ppm	ASTM D5185m >25	10	2	0
Lead	ppm	ASTM D5185m >25	0	0	0
Copper	ppm	ASTM D5185m >50	<1	21	14
Tin	ppm	ASTM D5185m >10	<1	<1	0
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0


ADDITIVES	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	202	214	265
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	8	8	9
Manganese	ppm	ASTM D5185m	2	7	7
Magnesium	ppm	ASTM D5185m	77	85	101
Calcium	ppm	ASTM D5185m	169	203	222
Phosphorus	ppm	ASTM D5185m	1301	1293	1447
Zinc	ppm	ASTM D5185m	137	164	185
Sulfur	ppm	ASTM D5185m	24434	22369	24421

CONTAMINANTS	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >75	54	34	32
Sodium	ppm	ASTM D5185m	4	0	3
Potassium	ppm	ASTM D5185m >20	4	2	2

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar	*Visual NONE	NONE	NONE	NONE
Precipitate	scalar	*Visual NONE	NONE	NONE	NONE
Silt	scalar	*Visual NONE	NONE	NONE	NONE
Debris	scalar	*Visual NONE	▲ MODER	NONE	NONE
Sand/Dirt	scalar	*Visual NONE	NONE	NONE	NONE
Appearance	scalar	*Visual NORML	NORML	NORML	NORML
Odor	scalar	*Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar	*Visual >0.2	NEG	NEG	NEG
Free Water	scalar	*Visual	NEG	NEG	NEG



OIL ANALYSIS REPORT

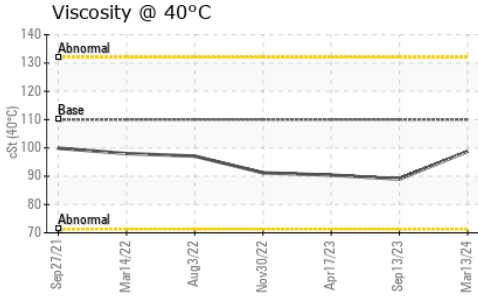

FLUID PROPERTIES


method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445 110	98.8	89.0	90.4

SAMPLE IMAGES


method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

GRAPHS


Ferrous Alloys

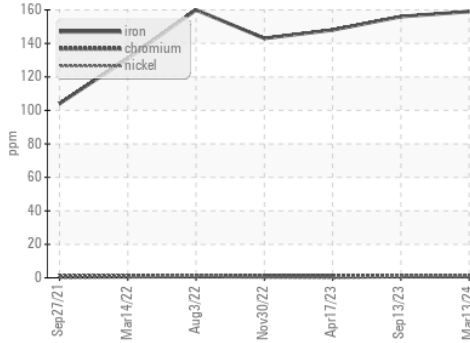

Non-ferrous Metals

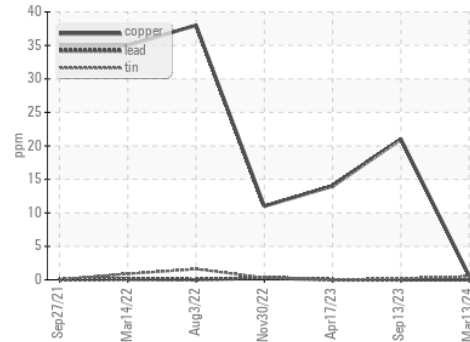

Viscosity @ 40°C

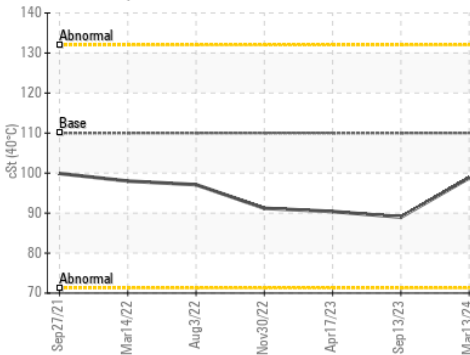

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0119987
Lab Number : **06128220**
Unique Number : 10942371
Test Package : FLEET

Received : 25 Mar 2024
Tested : 26 Mar 2024
Diagnosed : 28 Mar 2024 - Jonathan Hester

NW WHITE & CO - COLUMBIA DIVISION
 100 INDEPENDENCE BLVD
 COLUMBIA, SC
 US 29210
 Contact: GEORGE EDWARDS
 gedwards@nwwhite.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: