


# OIL ANALYSIS REPORT



Area  
**KEMP QUARRIES / HULBERT**  
Machine Id  
**WL043**  
Component  
**Transmission (Manual)**  
Fluid  
**MOBIL MOBILTRANS HD 30 (--- GAL)**

Sample Rating Trend

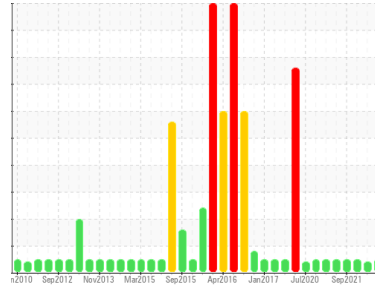

**NORMAL**

## DIAGNOSIS

- Recommendation**  
Resample at the next service interval to monitor.
- Wear**  
All component wear rates are normal.
- Contamination**  
There is no indication of any contamination in the fluid.
- Fluid Condition**  
The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0085896</b>	PCA0086175	PCA0048922
Sample Date	Client Info	<b>08 Mar 2024</b>	07 Jan 2023	12 Mar 2022
Machine Age	hrs	<b>27117</b>	46167	45671
Oil Age	hrs	<b>0</b>	0	0
Oil Changed	Client Info	<b>Changed</b>	Not Changd	Not Changd
Sample Status		<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >200	<b>11</b>	13	10
Chromium	ppm ASTM D5185m >5	<b>&lt;1</b>	0	0
Nickel	ppm ASTM D5185m >5	<b>&lt;1</b>	0	0
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	0	<1
Silver	ppm ASTM D5185m >7	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >25	<b>4</b>	3	0
Lead	ppm ASTM D5185m >45	<b>1</b>	1	0
Copper	ppm ASTM D5185m >225	<b>4</b>	3	1
Tin	ppm ASTM D5185m >10	<b>1</b>	<1	<1
Antimony	ppm ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	<b>&lt;1</b>	1	4
Barium	ppm ASTM D5185m	<b>1</b>	0	0
Molybdenum	ppm ASTM D5185m	<b>3</b>	3	5
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	<1	0
Magnesium	ppm ASTM D5185m	<b>22</b>	37	0
Calcium	ppm ASTM D5185m	<b>3672</b>	2703	3186
Phosphorus	ppm ASTM D5185m	<b>1041</b>	895	959
Zinc	ppm ASTM D5185m	<b>1152</b>	1053	1276
Sulfur	ppm ASTM D5185m	<b>4137</b>	4293	2965


## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >125	<b>13</b>	11	6
Sodium	ppm ASTM D5185m	<b>0</b>	2	0
Potassium	ppm ASTM D5185m >20	<b>2</b>	0	0

## VISUAL

method	limit/base	current	history1	history2
White Metal	scalar *Visual NONE	<b>NONE</b>	NONE	NONE
Yellow Metal	scalar *Visual NONE	<b>NONE</b>	NONE	NONE
Precipitate	scalar *Visual NONE	<b>NONE</b>	NONE	NONE
Silt	scalar *Visual NONE	<b>NONE</b>	NONE	NONE
Debris	scalar *Visual NONE	<b>NONE</b>	▲ MODER	LIGHT
Sand/Dirt	scalar *Visual NONE	<b>NONE</b>	NONE	NONE
Appearance	scalar *Visual NORML	<b>NORML</b>	NORML	NORML
Odor	scalar *Visual NORML	<b>NORML</b>	NORML	NORML
Emulsified Water	scalar *Visual >0.1	<b>NEG</b>	NEG	NEG
Free Water	scalar *Visual	<b>NEG</b>	NEG	NEG

# OIL ANALYSIS REPORT








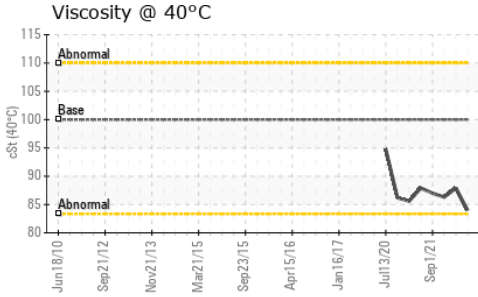


FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 40°C	cSt	ASTM D445	100	<b>84.0</b>	87.9	86.3

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color				no image	no image	no image
Bottom				no image	no image	no image

## GRAPHS

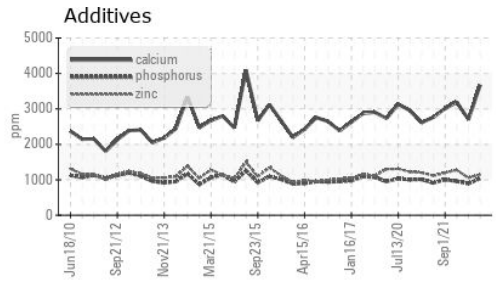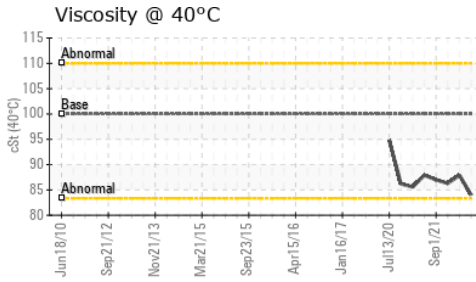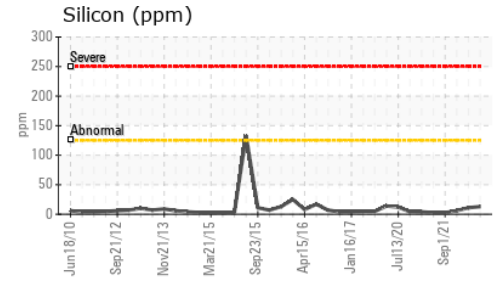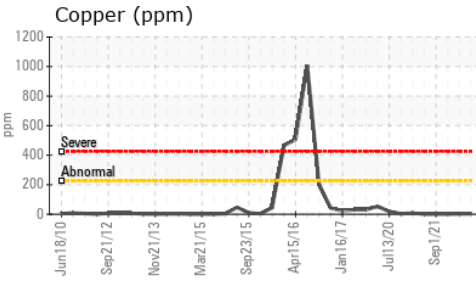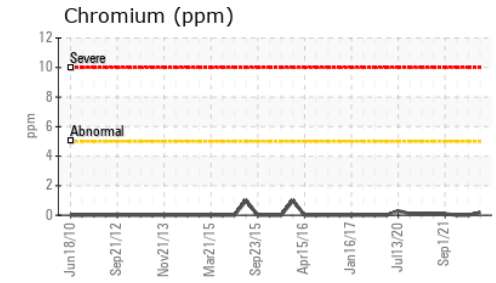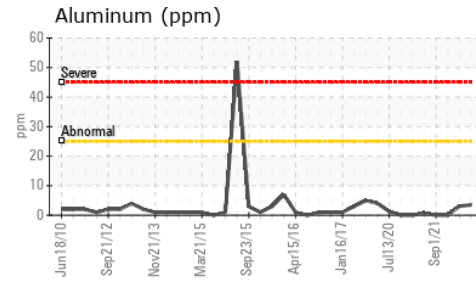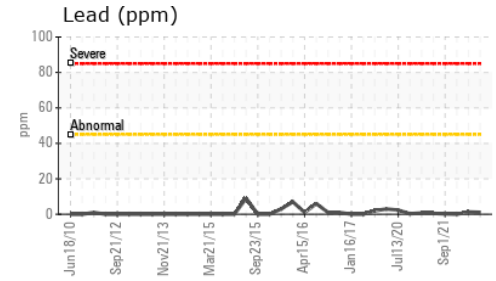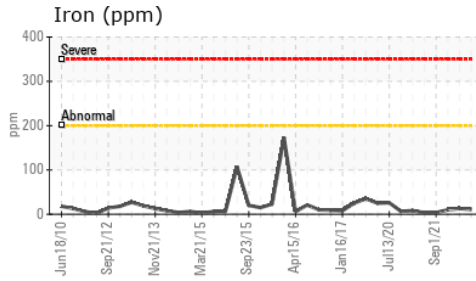

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0085896  
**Lab Number** : \*06128297  
**Unique Number** : 10942448  
**Test Package** : MOB 1

**Received** : 25 Mar 2024  
**Tested** : 26 Mar 2024  
**Diagnosed** : 26 Mar 2024 - Wes Davis

**Kemp Quarries - Kemp Stone - Hulbert**  
 17801 Hwy 80  
 Hulbert, OK  
 US 74441

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

hulbert@kempstone.com

T:  
F: