




# OIL ANALYSIS REPORT

Sample Rating Trend

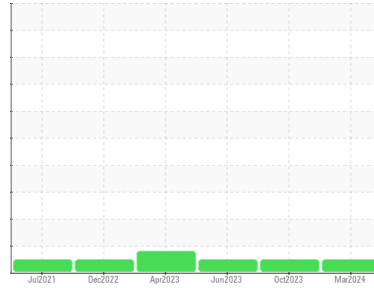

**NORMAL**



Machine Id  
**928053-172529**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0106198</b>	GFL0078631	GFL0082027
Sample Date	Client Info	<b>20 Mar 2024</b>	09 Oct 2023	06 Jun 2023
Machine Age	hrs	<b>8003</b>	7578	6901
Oil Age	hrs	<b>0</b>	600	0
Oil Changed	Client Info	<b>Not Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >110	<b>7</b>	12	15
Chromium	ppm ASTM D5185m >4	<b>&lt;1</b>	<1	<1
Nickel	ppm ASTM D5185m >2	<b>2</b>	0	0
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm ASTM D5185m >2	<b>&lt;1</b>	0	0
Aluminum	ppm ASTM D5185m >25	<b>3</b>	2	4
Lead	ppm ASTM D5185m >45	<b>1</b>	0	0
Copper	ppm ASTM D5185m >85	<b>33</b>	<1	1
Tin	ppm ASTM D5185m >4	<b>1</b>	0	0
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>16</b>	8	10
Barium	ppm ASTM D5185m 0	<b>1</b>	0	0
Molybdenum	ppm ASTM D5185m 60	<b>70</b>	63	63
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	0	<1
Magnesium	ppm ASTM D5185m 1010	<b>886</b>	927	966
Calcium	ppm ASTM D5185m 1070	<b>1276</b>	1096	1162
Phosphorus	ppm ASTM D5185m 1150	<b>1082</b>	1023	1057
Zinc	ppm ASTM D5185m 1270	<b>1263</b>	1223	1320
Sulfur	ppm ASTM D5185m 2060	<b>3453</b>	3422	3874

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	<b>4</b>	5	10
Sodium	ppm ASTM D5185m	<b>0</b>	<1	2
Potassium	ppm ASTM D5185m >20	<b>4</b>	2	3

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.2</b>	0.3	0.4
Nitration	Abs/cm *ASTM D7624 >20	<b>6.4</b>	5.9	7.6
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.3</b>	17.6	19.9

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>14.3</b>	13.1	16.0
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.5</b>	8.4	7.9







# OIL ANALYSIS REPORT

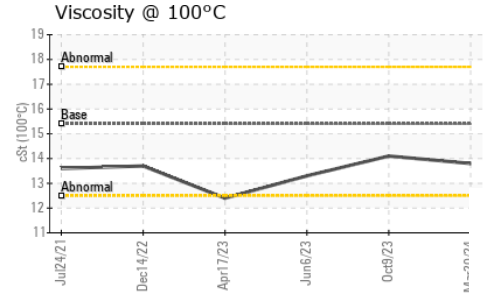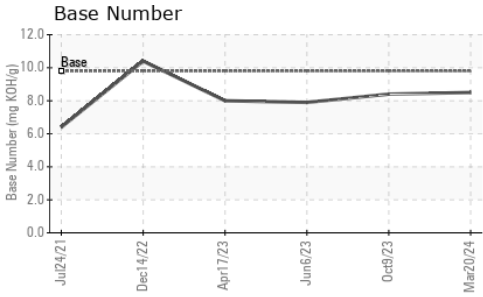

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.8</b>	14.1	13.3

## GRAPHS

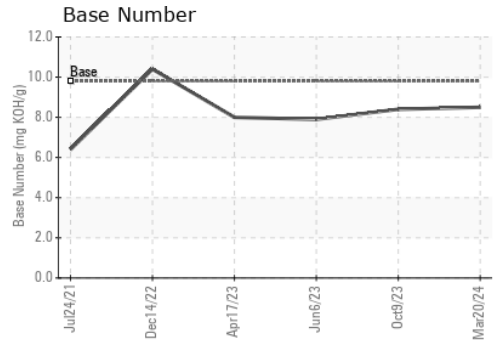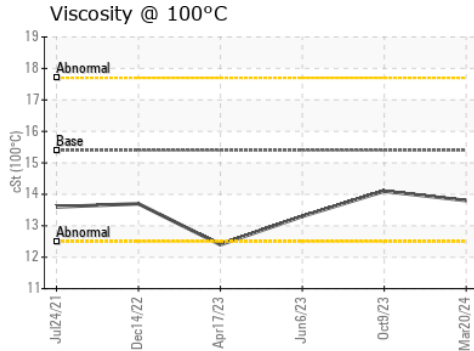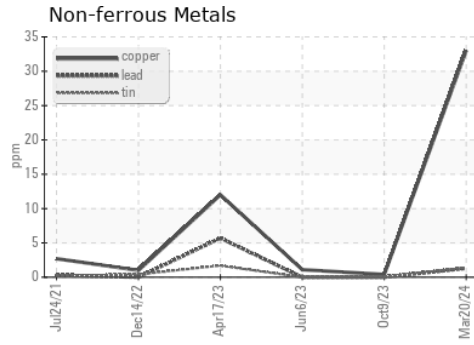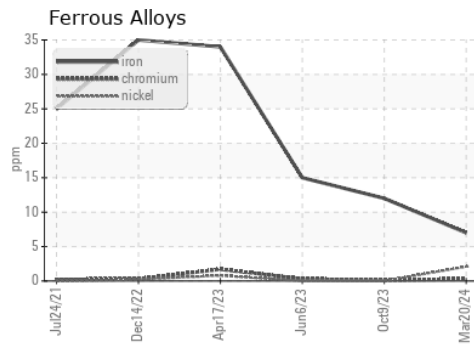

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0106198  
**Lab Number** : **06128406**  
**Unique Number** : 10942557  
**Test Package** : FLEET

**Received** : 25 Mar 2024  
**Tested** : 26 Mar 2024  
**Diagnosed** : 28 Mar 2024 - Don Baldrige

**GFL Environmental - 152 - Jacksonville**  
 7580 PHILIPS HWY  
 Jacksonville, FL  
 US 32256  
 Contact: Chris Smith  
 chris.smith@gflenv.com  
 T: (904)252-0013  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)