




OIL ANALYSIS REPORT



Area
KEMP QUARRIES / PRYOR STONE [68598]
 Machine Id
OHT058
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

Sample Rating Trend

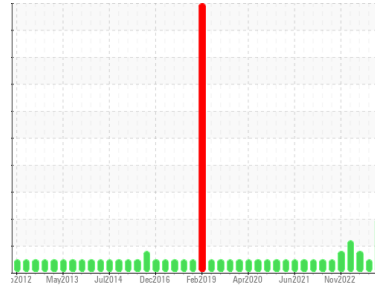

GLYCOL



DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition. (Customer Sample Comment: Pm1 performed. All oil samples taken. Engine oil, engine oil filters, fuel filters, and air filters changed.)

Wear

The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core).

Contamination

Sodium and/or potassium levels are high.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | PCA0086610 | PCA0084315 | PCA0084057 |
| Sample Date | Client Info | | 15 Mar 2024 | 09 Nov 2023 | 09 Aug 2023 |
| Machine Age | hrs | Client Info | 52052 | 51454 | 51041 |
| Oil Age | hrs | Client Info | 598 | 413 | 458 |
| Oil Changed | Client Info | | Changed | Changed | Changed |
| Sample Status | | | ABNORMAL | NORMAL | ABNORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|-------|-----------|------------|----------------|----------|----------|
| Fuel | WC Method | >5 | <1.0 | <1.0 | <1.0 |
| Water | WC Method | >0.2 | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >100 | 38 | 22 | 31 |
| Chromium | ppm | ASTM D5185m >20 | 1 | <1 | <1 |
| Nickel | ppm | ASTM D5185m >2 | 1 | 0 | <1 |
| Titanium | ppm | ASTM D5185m >2 | <1 | 0 | 0 |
| Silver | ppm | ASTM D5185m >2 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m >25 | 3 | <1 | 3 |
| Lead | ppm | ASTM D5185m >40 | 9 | 3 | 2 |
| Copper | ppm | ASTM D5185m >330 | ▲ 453 | 142 | ▲ 533 |
| Tin | ppm | ASTM D5185m >15 | 2 | <1 | <1 |
| Vanadium | ppm | ASTM D5185m | <1 | <1 | 0 |
| Cadmium | ppm | ASTM D5185m | <1 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron | ppm | ASTM D5185m 0 | 7 | 3 | 3 |
| Barium | ppm | ASTM D5185m 0 | 1 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m 60 | 74 | 61 | 59 |
| Manganese | ppm | ASTM D5185m 0 | <1 | 0 | <1 |
| Magnesium | ppm | ASTM D5185m 1010 | 991 | 997 | 916 |
| Calcium | ppm | ASTM D5185m 1070 | 1235 | 1116 | 1047 |
| Phosphorus | ppm | ASTM D5185m 1150 | 1143 | 1100 | 1021 |
| Zinc | ppm | ASTM D5185m 1270 | 1372 | 1337 | 1278 |
| Sulfur | ppm | ASTM D5185m 2060 | 3267 | 3045 | 3336 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|-----------------|--------------|----------|----------|
| Silicon | ppm | ASTM D5185m >25 | 10 | 5 | 6 |
| Sodium | ppm | ASTM D5185m | ▲ 238 | 40 | 69 |
| Potassium | ppm | ASTM D5185m >20 | 6 | 2 | <1 |
| Glycol | % | *ASTM D2982 | NEG | NEG | NEG |

INFRA-RED


| | method | limit/base | current | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 >3 | 0.8 | 0.6 | 0.7 |
| Nitration | Abs/cm | *ASTM D7624 >20 | 11.0 | 8.4 | 9.1 |
| Sulfation | Abs./1mm | *ASTM D7415 >30 | 21.9 | 21.1 | 19.4 |

FLUID DEGRADATION


| | method | limit/base | current | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation | Abs./1mm | *ASTM D7414 >25 | 19.4 | 16.9 | 15.5 |
| Base Number (BN) | mg KOH/g | ASTM D2896 9.8 | 7.6 | 8.6 | 7.3 |

OIL ANALYSIS REPORT


▲ Non-ferrous Metals

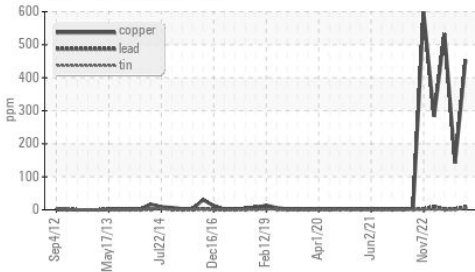


Glycol Contamination

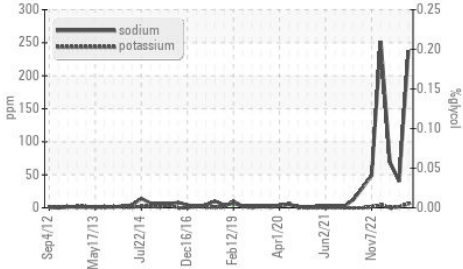

Viscosity @ 100°C

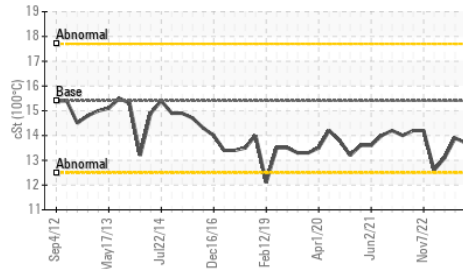


Glycol Contamination

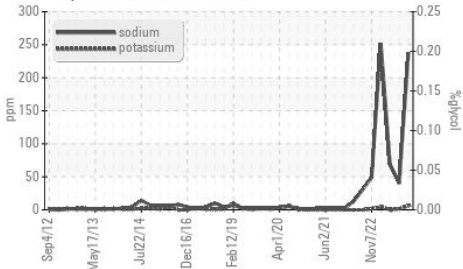

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|-------------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | 13.7 | 13.9 |

GRAPHS

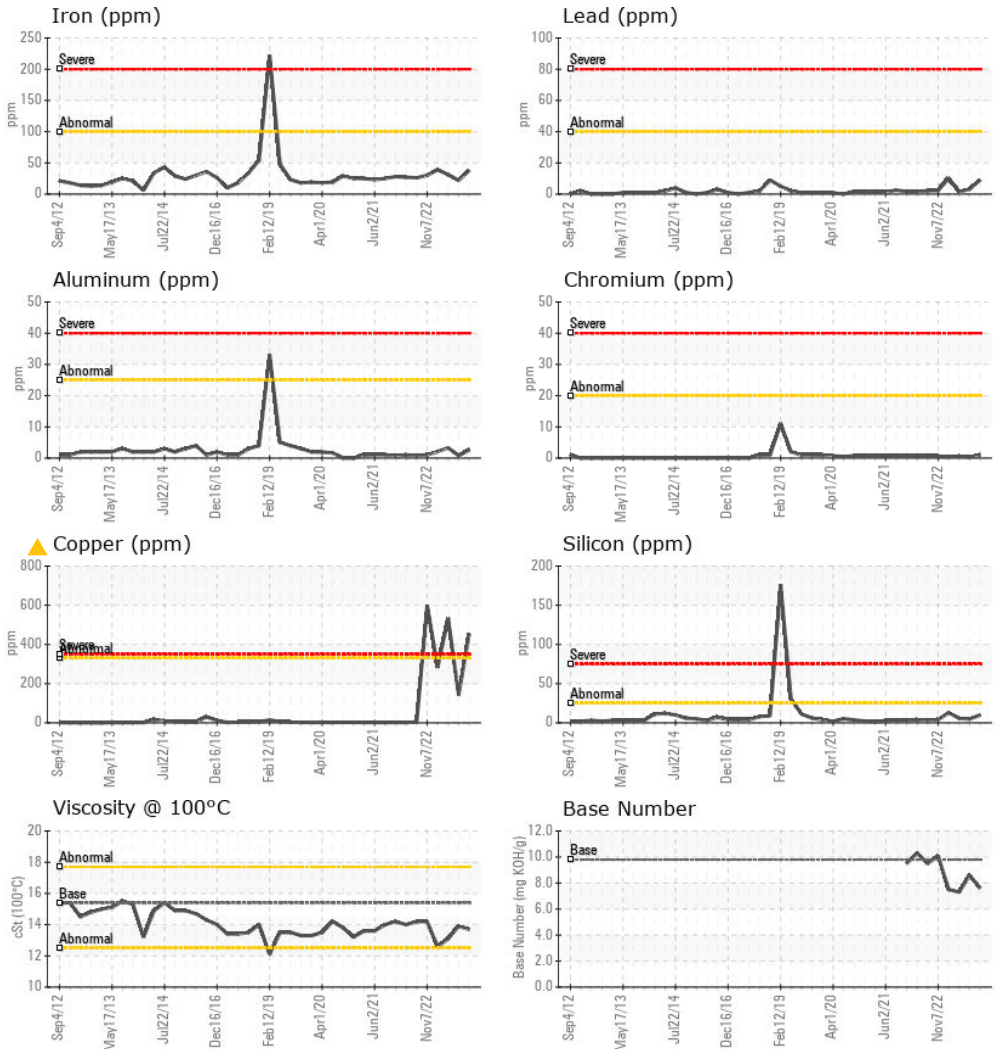

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0086610
Lab Number : **06128448**
Unique Number : 10942599
Test Package : MOB 1 (Additional Tests: Glycol, TBN)

Kemp Quarries - Pryor Stone - Pryor
 1050 E 520 Rd
 Pryor, OK
 US 74361
 Contact:
 pryor@pryorstone.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)