

# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**PETERBILT 454**  
 Component  
**Diesel Engine**  
 Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. The fluid was not specified, however, a fluid match indicates that this fluid is (GENERIC) DIESEL ENGINE OIL SAE 40. Please confirm.

### Wear

All component wear rates are normal.

### Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>PCA0115582</b>	---	---
Sample Date	Client Info	<b>24 Mar 2024</b>	---	---
Machine Age	mls Client Info	<b>0</b>	---	---
Oil Age	mls Client Info	<b>0</b>	---	---
Oil Changed	Client Info	<b>N/A</b>	---	---
Sample Status		<b>NORMAL</b>	---	---

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	---	---
Water	WC Method >0.2	<b>NEG</b>	---	---
Glycol	WC Method	<b>NEG</b>	---	---

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >110	<b>28</b>	---	---
Chromium	ppm ASTM D5185m >4	<b>1</b>	---	---
Nickel	ppm ASTM D5185m >2	<b>2</b>	---	---
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	---	---
Silver	ppm ASTM D5185m >2	<b>&lt;1</b>	---	---
Aluminum	ppm ASTM D5185m >25	<b>13</b>	---	---
Lead	ppm ASTM D5185m >45	<b>2</b>	---	---
Copper	ppm ASTM D5185m >85	<b>11</b>	---	---
Tin	ppm ASTM D5185m >4	<b>2</b>	---	---
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	---	---
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	---	---

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	<b>137</b>	---	---
Barium	ppm ASTM D5185m 10	<b>2</b>	---	---
Molybdenum	ppm ASTM D5185m 100	<b>11</b>	---	---
Manganese	ppm ASTM D5185m	<b>2</b>	---	---
Magnesium	ppm ASTM D5185m 450	<b>185</b>	---	---
Calcium	ppm ASTM D5185m 3000	<b>2379</b>	---	---
Phosphorus	ppm ASTM D5185m 1150	<b>1068</b>	---	---
Zinc	ppm ASTM D5185m 1350	<b>1281</b>	---	---
Sulfur	ppm ASTM D5185m 4250	<b>3850</b>	---	---

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	<b>12</b>	---	---
Sodium	ppm ASTM D5185m >216	<b>1</b>	---	---
Potassium	ppm ASTM D5185m >20	<b>49</b>	---	---



## INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.2</b>	---	---
Nitration	Abs/cm *ASTM D7624 >20	<b>8.4</b>	---	---
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>21.2</b>	---	---

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>18.2</b>	---	---
Base Number (BN)	mg KOH/g ASTM D2896 8.5	<b>6.5</b>	---	---





# OIL ANALYSIS REPORT

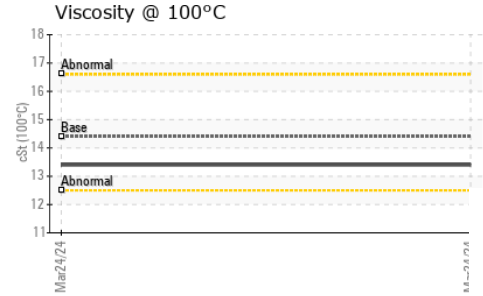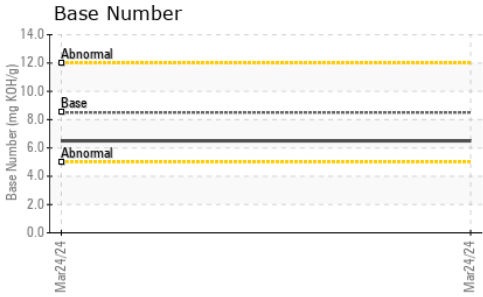

VISUAL	method	limit/base	current	history1	history2	
White Metal	scalar	*Visual	NONE	NONE	---	---
Yellow Metal	scalar	*Visual	NONE	NONE	---	---
Precipitate	scalar	*Visual	NONE	NONE	---	---
Silt	scalar	*Visual	NONE	NONE	---	---
Debris	scalar	*Visual	NONE	NONE	---	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---	---
Appearance	scalar	*Visual	NORML	NORML	---	---
Odor	scalar	*Visual	NORML	NORML	---	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---	---
Free Water	scalar	*Visual		NEG	---	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.4</b>	---	---

## GRAPHS

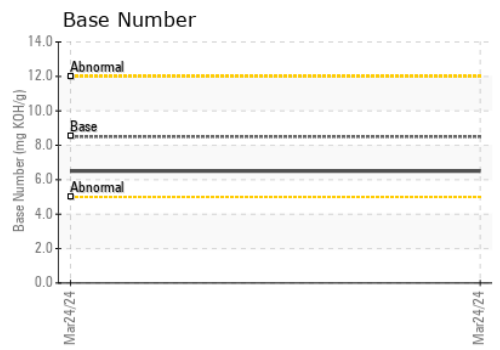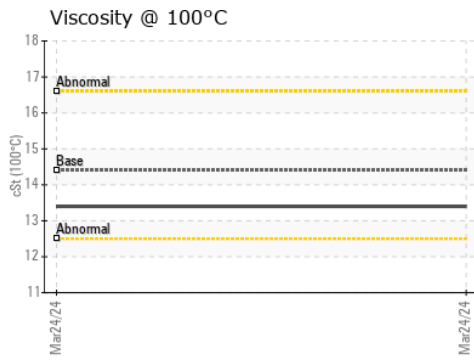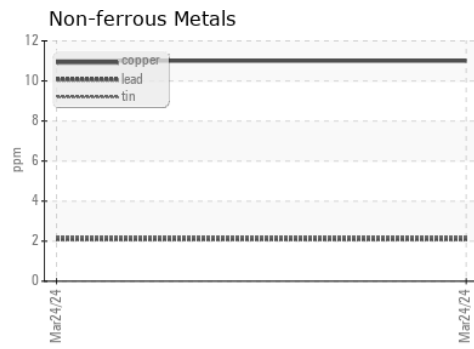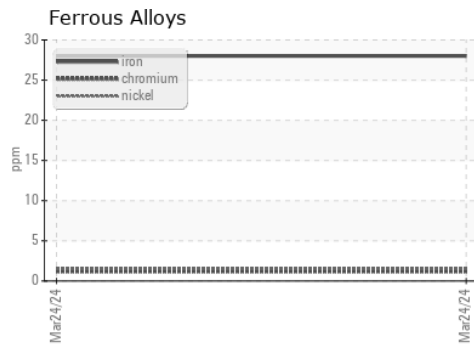

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0115582      **Received** : 25 Mar 2024  
**Lab Number** : **06128544**      **Tested** : 26 Mar 2024  
**Unique Number** : 10942695      **Diagnosed** : 26 Mar 2024 - Wes Davis  
**Test Package** : FLEET

**LEFEBVRE AND SONS**  
 10895 171ST AVE NW  
 ELK RIVER, MN  
 US 55330  
 Contact: JAY LEFEBVRE  
 jay.lefebvre@lefruck.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)