


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

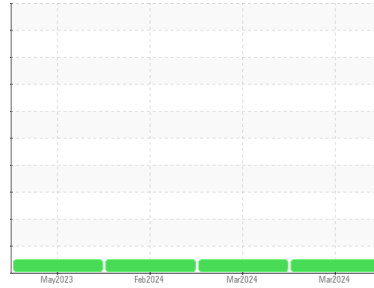

Machine Id
450
 Component
Diesel Engine
 Fluid
DIESEL ENGINE OIL SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample. Please specify the brand, type, and viscosity of the oil on your next sample.

Wear

All component wear rates are normal.

Contamination

Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0115578	PCA0115576	PCA0082953
Sample Date	Client Info		18 Mar 2024	18 Mar 2024	25 Feb 2024
Machine Age	mls	Client Info	0	0	0
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info		N/A	N/A	N/A
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	9	26	15
Chromium	ppm	ASTM D5185m >20	<1	1	2
Nickel	ppm	ASTM D5185m >4	1	<1	<1
Titanium	ppm	ASTM D5185m	<1	<1	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	6	4	19
Lead	ppm	ASTM D5185m >40	1	10	2
Copper	ppm	ASTM D5185m >330	1	1	2
Tin	ppm	ASTM D5185m >15	1	1	<1
Vanadium	ppm	ASTM D5185m	<1	<1	<1
Cadmium	ppm	ASTM D5185m	<1	<1	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 250	23	24	12
Barium	ppm	ASTM D5185m 10	1	1	0
Molybdenum	ppm	ASTM D5185m 100	66	66	62
Manganese	ppm	ASTM D5185m	<1	<1	<1
Magnesium	ppm	ASTM D5185m 450	964	921	1016
Calcium	ppm	ASTM D5185m 3000	1253	1547	1167
Phosphorus	ppm	ASTM D5185m 1150	1117	1219	1104
Zinc	ppm	ASTM D5185m 1350	1322	1465	1346
Sulfur	ppm	ASTM D5185m 4250	3697	3783	3112

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	5	10	6
Sodium	ppm	ASTM D5185m >158	0	6	7
Potassium	ppm	ASTM D5185m >20	12	20	50



INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.1	0.6	0.2
Nitration	Abs/cm	*ASTM D7624 >20	5.9	11.0	7.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	18.1	24.6	19.2

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	14.2	21.9	15.3
Base Number (BN)	mg KOH/g	ASTM D2896 8.5	8.7	6.9	7.8





OIL ANALYSIS REPORT

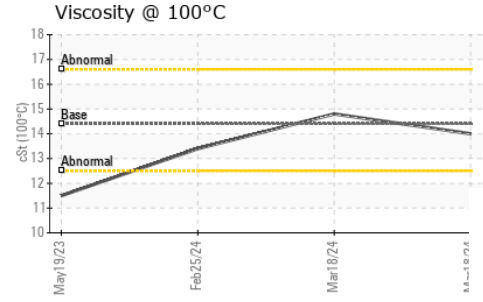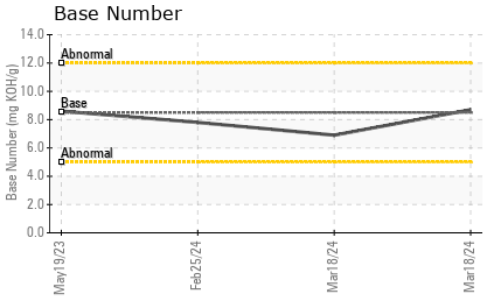

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	14.0	14.8	13.4

GRAPHS

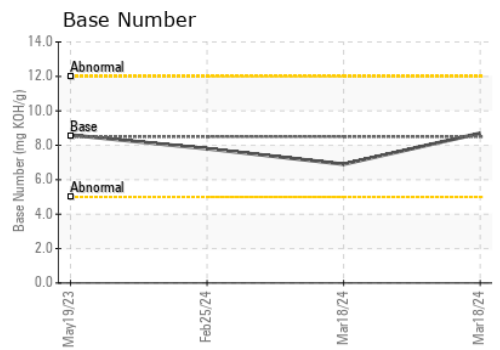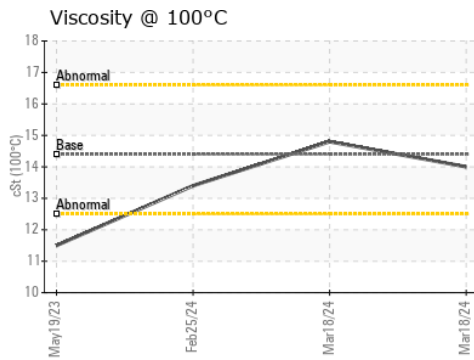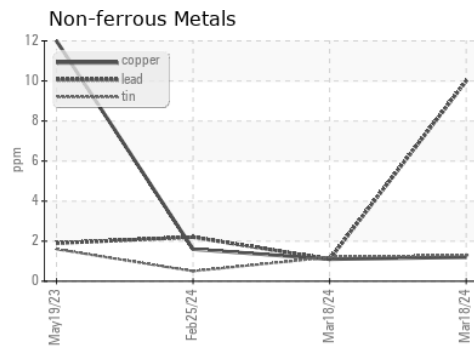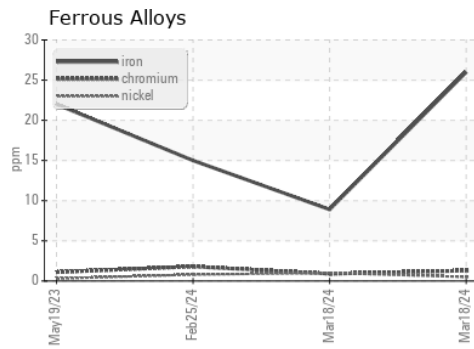

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0115578 **Received** : 25 Mar 2024
Lab Number : **06128548** **Tested** : 26 Mar 2024
Unique Number : 10942699 **Diagnosed** : 26 Mar 2024 - Wes Davis
Test Package : FLEET

LEFEBVRE AND SONS
 10895 171ST AVE NW
 ELK RIVER, MN
 US 55330
 Contact: JAY LEFEBVRE
 jay.lefebvre@letruck.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)