




OIL ANALYSIS REPORT

Sample Rating Trend

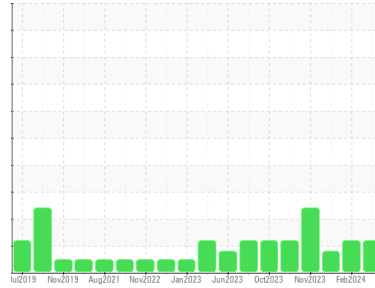

FUEL



Machine Id
429042-402342

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0109168	GFL0109236	GFL0098347
Sample Date	Client Info	18 Mar 2024	19 Feb 2024	08 Dec 2023
Machine Age	hrs	16826	16724	16361
Oil Age	hrs	150	150	700
Oil Changed	Client Info	Not Chngd	Not Chngd	Not Chngd
Sample Status		ABNORMAL	ABNORMAL	MARGINAL

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>110	25	14	2
Chromium	ppm	ASTM D5185m	>4	1	<1	0
Nickel	ppm	ASTM D5185m	>2	<1	0	<1
Titanium	ppm	ASTM D5185m		<1	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>25	3	2	1
Lead	ppm	ASTM D5185m	>45	3	<1	0
Copper	ppm	ASTM D5185m	>85	2	<1	0
Tin	ppm	ASTM D5185m	>4	1	0	<1
Vanadium	ppm	ASTM D5185m		<1	0	0
Cadmium	ppm	ASTM D5185m		<1	0	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	0	0	2
Barium	ppm	ASTM D5185m	0	1	0	0
Molybdenum	ppm	ASTM D5185m	60	85	56	56
Manganese	ppm	ASTM D5185m	0	1	<1	<1
Magnesium	ppm	ASTM D5185m	1010	1309	949	891
Calcium	ppm	ASTM D5185m	1070	1539	1025	951
Phosphorus	ppm	ASTM D5185m	1150	1460	1011	1022
Zinc	ppm	ASTM D5185m	1270	1749	1209	1195
Sulfur	ppm	ASTM D5185m	2060	4552	2949	3035

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>30	9	7	2
Sodium	ppm	ASTM D5185m		5	11	1
Potassium	ppm	ASTM D5185m	>20	3	4	2
Fuel	%	ASTM D3524	>5	▲ 7.6	▲ 7.4	▲ 2.7

INFRA-RED

method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>3	0.6	0.4	0.2
Nitration	Abs/cm	*ASTM D7624	>20	9.2	8.1	5.2
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.7	18.8	17.4


FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	16.9	15.5	13.0
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	7.3	8.1	8.8




OIL ANALYSIS REPORT


▲ Fuel Dilution

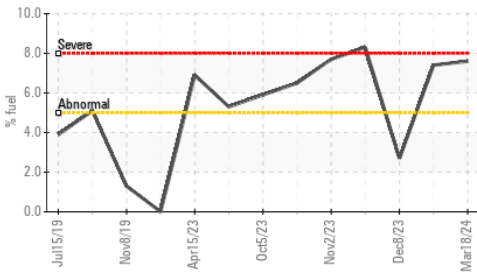

▲ Viscosity @ 100°C

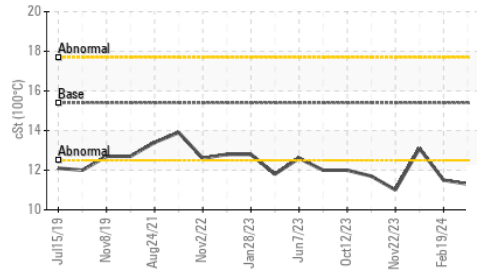

Base Number

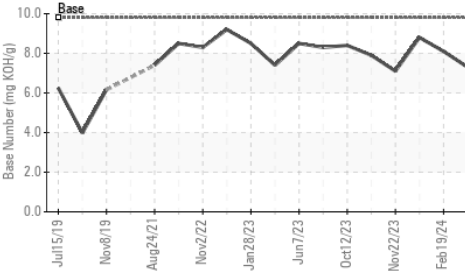


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4 ▲ 11.3	▲ 11.5	13.1

GRAPHS


Ferrous Alloys

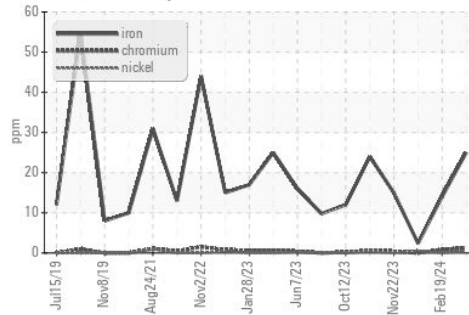


Non-ferrous Metals

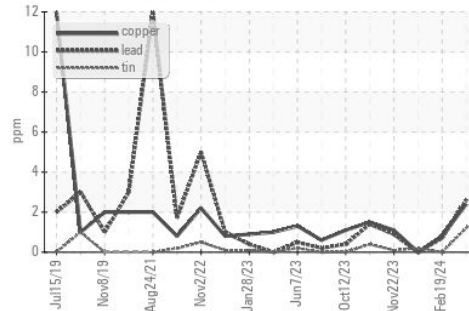

▲ Viscosity @ 100°C

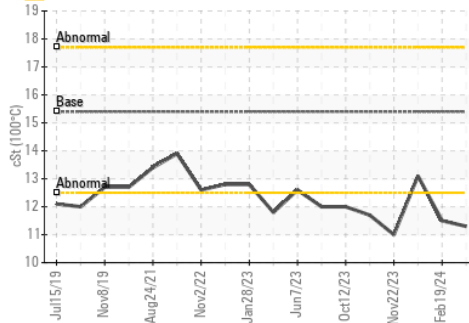

Base Number

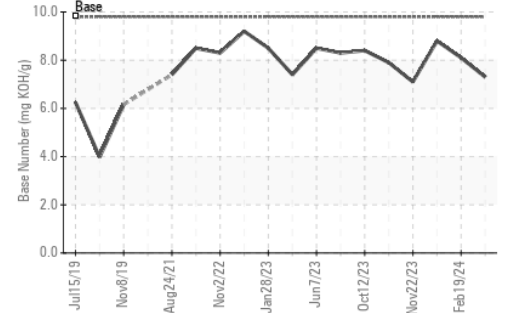

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0109168

Lab Number : 06128615

Unique Number : 10942766

Test Package : FLEET (Additional Tests: PercentFuel)

Received : 25 Mar 2024

Tested : 28 Mar 2024

Diagnosed : 28 Mar 2024 - Wes Davis

GFL Environmental - 822 - Springfield Hauling

2120 West Bennett Street

Springfield, MO

US 65807

Contact: Dennis Moore

dennis.moore@gflenv.com

T: (417)403-3641

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)