


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

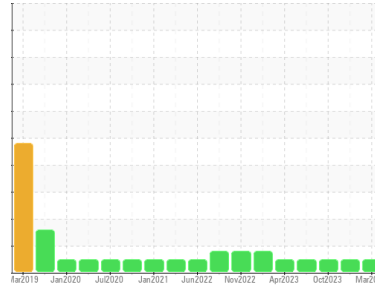

Area
KEMP QUARRIES / KEMP STONE - FAIRLAND [69063]
Machine Id
WL128
Component
Rear Right Final Drive
Fluid
PETRO CANADA PRODURO TO-4 SAE 50 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: PM-1 sampled fluid)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	PCA0109313	PCA0086565	PCA0084758
Sample Date	Client Info	20 Mar 2024	21 Dec 2023	06 Oct 2023
Machine Age	hrs	35410	34924	34458
Oil Age	hrs	35410	34924	34458
Oil Changed	Client Info	N/A	Changed	N/A
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.2	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >800	44	292	308
Chromium	ppm ASTM D5185m >10	<1	<1	3
Nickel	ppm ASTM D5185m >5	0	0	<1
Titanium	ppm ASTM D5185m >15	0	<1	<1
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >75	1	3	4
Lead	ppm ASTM D5185m >10	0	<1	0
Copper	ppm ASTM D5185m >75	0	2	2
Tin	ppm ASTM D5185m >8	0	<1	0
Vanadium	ppm ASTM D5185m	0	0	0
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 2	0	<1	0
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 0	<1	2	3
Manganese	ppm ASTM D5185m 0	<1	2	2
Magnesium	ppm ASTM D5185m 9	16	18	15
Calcium	ppm ASTM D5185m 3114	3067	3134	3316
Phosphorus	ppm ASTM D5185m 1099	1043	958	1001
Zinc	ppm ASTM D5185m 1245	1231	1194	1215
Sulfur	ppm ASTM D5185m 7086	5717	4615	4793


CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >400	8	34	37
Sodium	ppm ASTM D5185m	<1	1	0
Potassium	ppm ASTM D5185m >20	0	<1	2

VISUAL

method	limit/base	current	history1	history2
White Metal	scalar *Visual NONE	NONE	NONE	NONE
Yellow Metal	scalar *Visual NONE	NONE	NONE	NONE
Precipitate	scalar *Visual NONE	NONE	NONE	NONE
Silt	scalar *Visual NONE	NONE	NONE	NONE
Debris	scalar *Visual NONE	NONE	NONE	NONE
Sand/Dirt	scalar *Visual NONE	NONE	NONE	NONE
Appearance	scalar *Visual NORML	NORML	NORML	NORML
Odor	scalar *Visual NORML	NORML	NORML	NORML
Emulsified Water	scalar *Visual >0.2	NEG	NEG	NEG
Free Water	scalar *Visual	NEG	NEG	NEG

OIL ANALYSIS REPORT








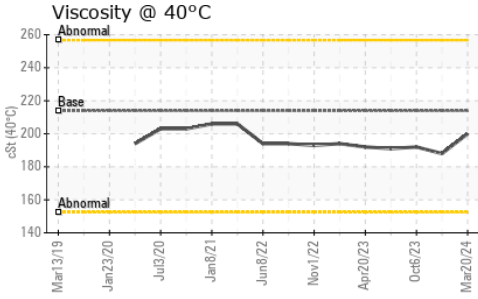


FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	213.9	200	188	192

SAMPLE IMAGES		method	limit/base	current	history1	history2
---------------	--	--------	------------	---------	----------	----------

Color		no image	no image	no image
Bottom		no image	no image	no image

GRAPHS

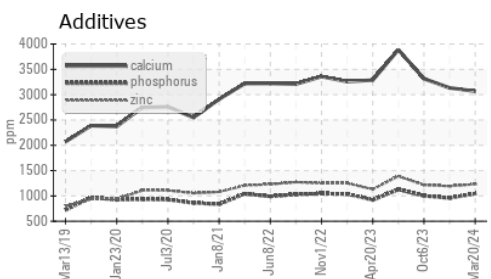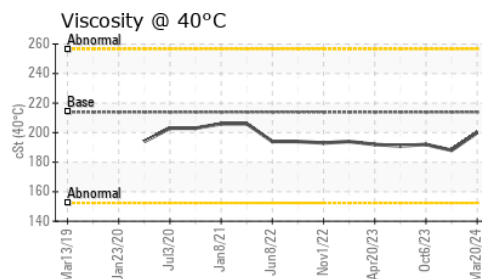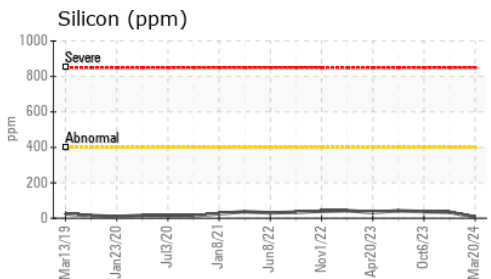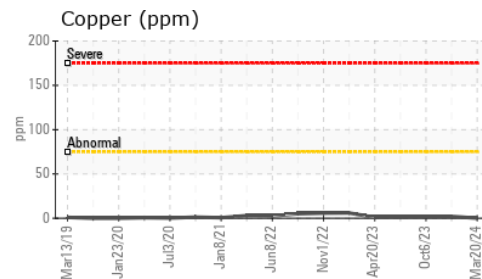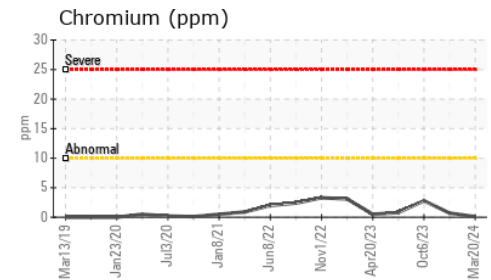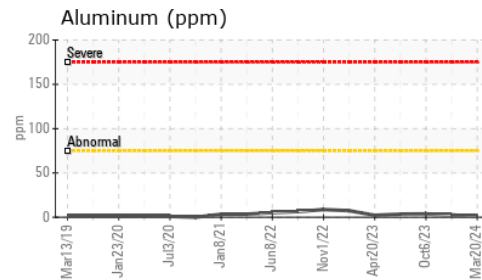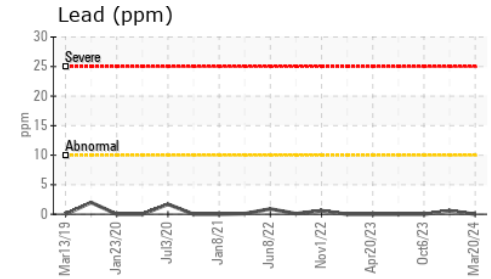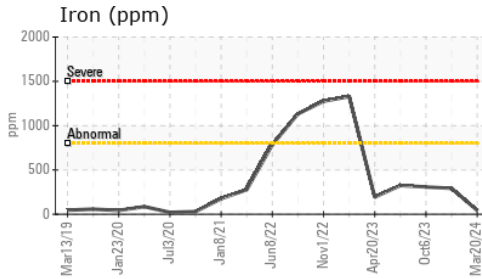

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0109313
Lab Number : 06128943
Unique Number : 10943094
Test Package : MOB 1

Received : 25 Mar 2024
Tested : 30 Mar 2024
Diagnosed : 30 Mar 2024 - Don Baldrige

Kemp Quarries - Kemp Stone - Fairland
 18350 S 590 Rd
 Fairland, OK
 US 74343

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

fairland@kempstone.com

T:
F: