




# OIL ANALYSIS REPORT

Sample Rating Trend

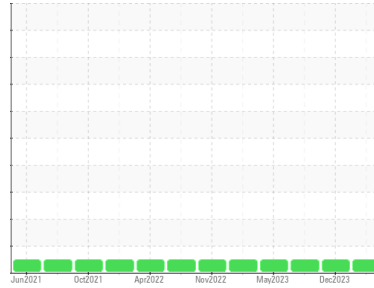

**NORMAL**



Machine Id  
**748006**

Component  
**Natural Gas Engine**

Fluid  
**PETRO CANADA DURON GEO LD 15W40 (--- LTR)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

|               | method      | limit/base  | current            | history1    | history2    |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info |             | <b>GFL0115479</b>  | GFL0106957  | GFL0089711  |
| Sample Date   | Client Info |             | <b>22 Mar 2024</b> | 16 Dec 2023 | 08 Sep 2023 |
| Machine Age   | hrs         | Client Info | <b>14761</b>       | 14160       | 13523       |
| Oil Age       | hrs         | Client Info | <b>601</b>         | 637         | 884         |
| Oil Changed   | Client Info |             | <b>Changed</b>     | Changed     | Changed     |
| Sample Status |             |             | <b>NORMAL</b>      | NORMAL      | NORMAL      |

## CONTAMINATION

|       | method    | limit/base | current    | history1 | history2 |
|-------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.1       | <b>NEG</b> | NEG      | NEG      |

## WEAR METALS

|          | method | limit/base      | current      | history1 | history2 |
|----------|--------|-----------------|--------------|----------|----------|
| Iron     | ppm    | ASTM D5185m >50 | <b>21</b>    | 3        | 4        |
| Chromium | ppm    | ASTM D5185m >4  | <b>0</b>     | <1       | <1       |
| Nickel   | ppm    | ASTM D5185m >2  | <b>&lt;1</b> | 0        | 0        |
| Titanium | ppm    | ASTM D5185m     | <b>&lt;1</b> | 0        | 0        |
| Silver   | ppm    | ASTM D5185m >3  | <b>0</b>     | 0        | 0        |
| Aluminum | ppm    | ASTM D5185m >9  | <b>2</b>     | 1        | <1       |
| Lead     | ppm    | ASTM D5185m >30 | <b>1</b>     | <1       | 0        |
| Copper   | ppm    | ASTM D5185m >35 | <b>&lt;1</b> | <1       | <1       |
| Tin      | ppm    | ASTM D5185m >4  | <b>&lt;1</b> | 0        | <1       |
| Vanadium | ppm    | ASTM D5185m     | <b>0</b>     | <1       | <1       |
| Cadmium  | ppm    | ASTM D5185m     | <b>0</b>     | 0        | 0        |

## ADDITIVES

|            | method | limit/base       | current      | history1 | history2 |
|------------|--------|------------------|--------------|----------|----------|
| Boron      | ppm    | ASTM D5185m 50   | <b>4</b>     | 26       | 27       |
| Barium     | ppm    | ASTM D5185m 5    | <b>0</b>     | 0        | 0        |
| Molybdenum | ppm    | ASTM D5185m 50   | <b>59</b>    | 48       | 51       |
| Manganese  | ppm    | ASTM D5185m 0    | <b>&lt;1</b> | 0        | <1       |
| Magnesium  | ppm    | ASTM D5185m 560  | <b>879</b>   | 530      | 599      |
| Calcium    | ppm    | ASTM D5185m 1510 | <b>1051</b>  | 1419     | 1644     |
| Phosphorus | ppm    | ASTM D5185m 780  | <b>1046</b>  | 706      | 793      |
| Zinc       | ppm    | ASTM D5185m 870  | <b>1232</b>  | 872      | 983      |
| Sulfur     | ppm    | ASTM D5185m 2040 | <b>3398</b>  | 2294     | 2968     |

## CONTAMINANTS

|           | method | limit/base        | current   | history1 | history2 |
|-----------|--------|-------------------|-----------|----------|----------|
| Silicon   | ppm    | ASTM D5185m >+100 | <b>3</b>  | 3        | 3        |
| Sodium    | ppm    | ASTM D5185m       | <b>18</b> | 4        | 5        |
| Potassium | ppm    | ASTM D5185m >20   | <b>10</b> | <1       | <1       |

## INFRA-RED



|           | method   | limit/base      | current     | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot %    | %        | *ASTM D7844     | <b>1.5</b>  | 0.1      | 0.1      |
| Nitration | Abs/cm   | *ASTM D7624 >20 | <b>10.4</b> | 8.4      | 8.4      |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | <b>20.6</b> | 18.7     | 18.1     |

## FLUID DEGRADATION

|                  | method   | limit/base      | current     | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation        | Abs/.1mm | *ASTM D7414 >25 | <b>16.6</b> | 16.2     | 15.3     |
| Base Number (BN) | mg KOH/g | ASTM D2896 10.2 | <b>8.8</b>  | 7.8      | 7.7      |








# OIL ANALYSIS REPORT

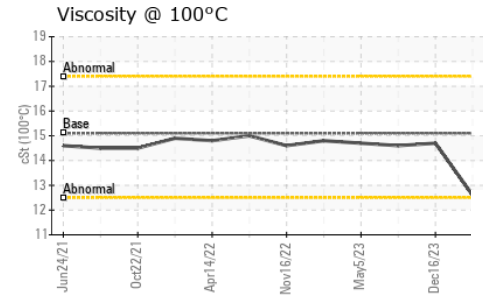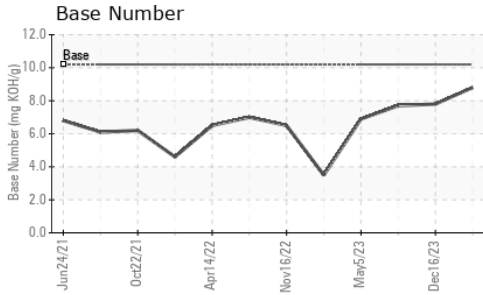

| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | NONE     |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | NONE     |
| Silt             | scalar | *Visual    | NONE    | NONE     | NONE     |
| Debris           | scalar | *Visual    | NONE    | NONE     | NONE     |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | NONE     |
| Appearance       | scalar | *Visual    | NORML   | NORML    | NORML    |
| Odor             | scalar | *Visual    | NORML   | NORML    | NORML    |
| Emulsified Water | scalar | *Visual    | >0.1    | NEG      | NEG      |
| Free Water       | scalar | *Visual    |         | NEG      | NEG      |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C     | cSt    | ASTM D445  | 15.1    | 12.6     | 14.7     |

## GRAPHS

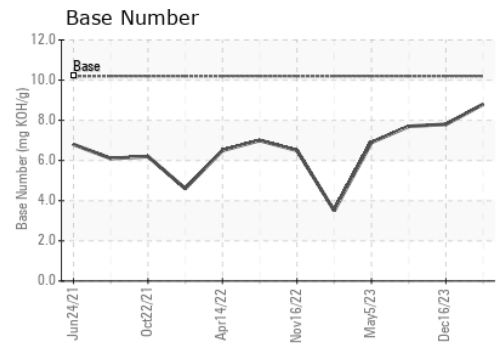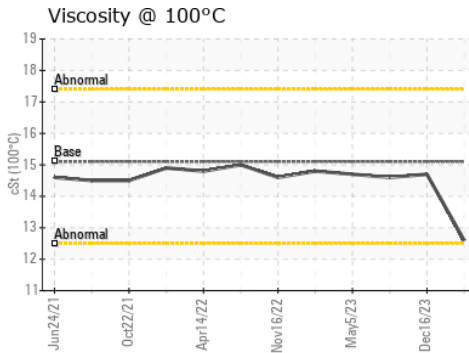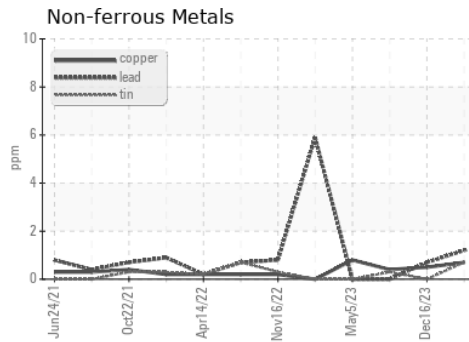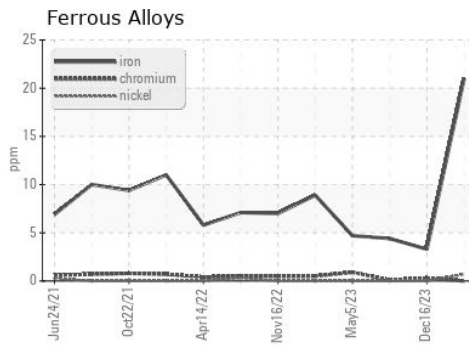

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0115479      **Received** : 26 Mar 2024  
**Lab Number** : 06129139      **Tested** : 27 Mar 2024  
**Unique Number** : 10943290      **Diagnosed** : 28 Mar 2024 - Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 882 - Gainesville**  
 5002 SW 41st Blvd  
 Gainesville, FL  
 US 32608  
 Contact: ROBERT CLARK  
 robert.clark@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: