




OIL ANALYSIS REPORT

Sample Rating Trend

FUEL



Machine Id
541M
Component
Diesel Engine
Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

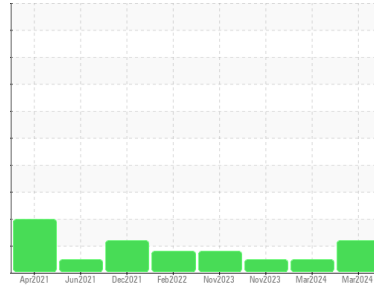

DIAGNOSIS

Recommendation

The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | GFL0108862 | GFL0108890 | GFL0101503 |
| Sample Date | Client Info | | 22 Mar 2024 | 02 Mar 2024 | 29 Nov 2023 |
| Machine Age | hrs | Client Info | 25244 | 25113 | 24609 |
| Oil Age | hrs | Client Info | 600 | 24609 | 24461 |
| Oil Changed | Client Info | | Changed | Not Changd | Changed |
| Sample Status | | | ABNORMAL | NORMAL | NORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|------------|----------|----------|
| Water | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | WC Method | | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 | |
|----------|--------|-------------|---------|--------------|----------|----|
| Iron | ppm | ASTM D5185m | >90 | 30 | 23 | 8 |
| Chromium | ppm | ASTM D5185m | >20 | 1 | 1 | 0 |
| Nickel | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| Titanium | ppm | ASTM D5185m | >2 | 0 | 0 | <1 |
| Silver | ppm | ASTM D5185m | >2 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m | >20 | 4 | 3 | 2 |
| Lead | ppm | ASTM D5185m | >40 | 0 | <1 | 0 |
| Copper | ppm | ASTM D5185m | >330 | <1 | 2 | 1 |
| Tin | ppm | ASTM D5185m | >15 | 0 | 0 | 0 |
| Vanadium | ppm | ASTM D5185m | | <1 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 | |
|------------|--------|-------------|---------|--------------|----------|------|
| Boron | ppm | ASTM D5185m | 0 | <1 | <1 | 0 |
| Barium | ppm | ASTM D5185m | 0 | 0 | 0 | 0 |
| Molybdenum | ppm | ASTM D5185m | 60 | 48 | 59 | 57 |
| Manganese | ppm | ASTM D5185m | 0 | <1 | 0 | 0 |
| Magnesium | ppm | ASTM D5185m | 1010 | 778 | 908 | 843 |
| Calcium | ppm | ASTM D5185m | 1070 | 893 | 985 | 1043 |
| Phosphorus | ppm | ASTM D5185m | 1150 | 881 | 987 | 957 |
| Zinc | ppm | ASTM D5185m | 1270 | 1046 | 1214 | 1133 |
| Sulfur | ppm | ASTM D5185m | 2060 | 2947 | 2910 | 2925 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 | |
|-----------|--------|-------------|---------|--------------|----------|------|
| Silicon | ppm | ASTM D5185m | >25 | 3 | 4 | 2 |
| Sodium | ppm | ASTM D5185m | | 3 | 4 | 1 |
| Potassium | ppm | ASTM D5185m | >20 | 0 | 2 | 2 |
| Fuel | % | ASTM D3524 | >3.0 | ▲ 4.8 | <1.0 | <1.0 |

INFRA-RED




| | method | limit/base | current | history1 | history2 | |
|-----------|----------|-------------|---------|-------------|----------|------|
| Soot % | % | *ASTM D7844 | >6 | 1.1 | 0.6 | 0.2 |
| Nitration | Abs/cm | *ASTM D7624 | >20 | 10.7 | 9.2 | 6.3 |
| Sulfation | Abs/.1mm | *ASTM D7415 | >30 | 23.3 | 19.6 | 18.4 |

FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 | |
|------------------|----------|-------------|---------|-------------|----------|------|
| Oxidation | Abs/.1mm | *ASTM D7414 | >25 | 19.9 | 16.7 | 14.5 |
| Base Number (BN) | mg KOH/g | ASTM D2896 | 9.8 | 6.0 | 8.3 | 9.1 |







OIL ANALYSIS REPORT

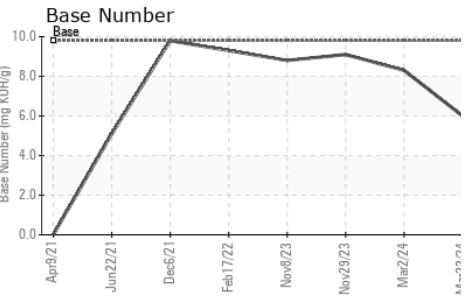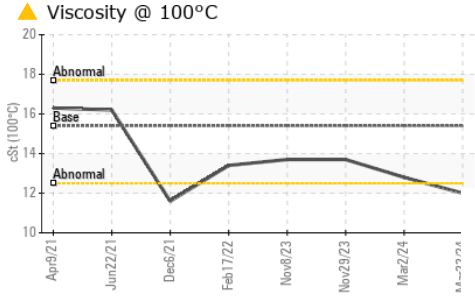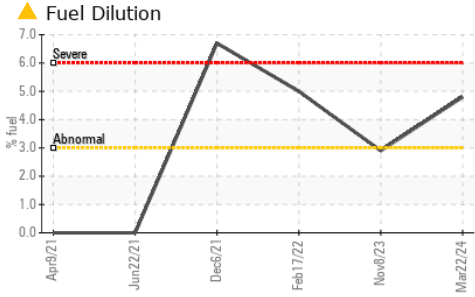

| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 | |
|------------------|--------|------------|---------|----------|----------|------|
| Visc @ 100°C | cSt | ASTM D445 | 15.4 | ▲ 12.0 | 12.8 | 13.7 |

GRAPHS

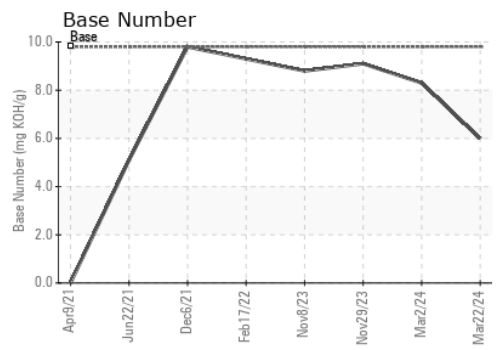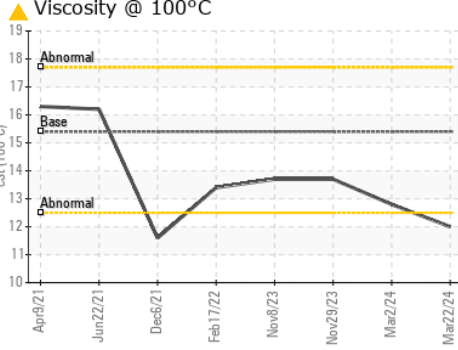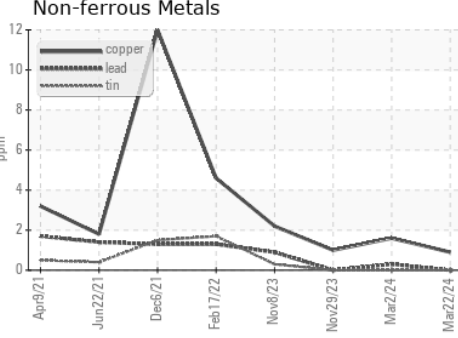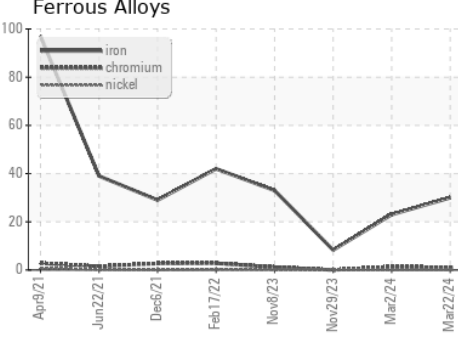

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0108862 **Received** : 26 Mar 2024
Lab Number : 06129290 **Tested** : 29 Mar 2024
Unique Number : 10943441 **Diagnosed** : 29 Mar 2024 - Wes Davis
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 415 - Michigan East
 6200 Elmridge
 Sterling Heights, MI
 US 48313
 Contact: Frank Wolak
 fwolak@gflenv.com
 T: (586)825-9514
 F:

Certificate L2367
 To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)