




# OIL ANALYSIS REPORT

Sample Rating Trend

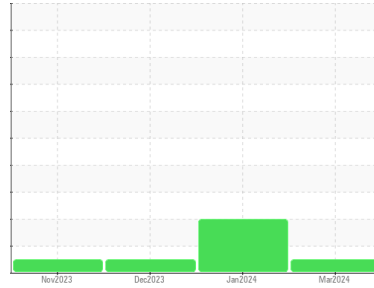

**NORMAL**



Machine Id  
**714022**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0108770</b>	GFL0108811	GFL0105591
Sample Date	Client Info		<b>22 Mar 2024</b>	10 Jan 2024	11 Dec 2023
Machine Age	hrs	Client Info	<b>1175</b>	589	340
Oil Age	hrs	Client Info	<b>589</b>	340	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	0.3	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>19</b>	34	5
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	0
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	<1	0
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	6	1
Lead	ppm	ASTM D5185m >40	<b>2</b>	2	<1
Copper	ppm	ASTM D5185m >330	<b>195</b>	280	23
Tin	ppm	ASTM D5185m >15	<b>0</b>	1	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>10</b>	218	52
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>63</b>	115	63
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	4	<1
Magnesium	ppm	ASTM D5185m 1010	<b>953</b>	763	947
Calcium	ppm	ASTM D5185m 1070	<b>1120</b>	1477	1096
Phosphorus	ppm	ASTM D5185m 1150	<b>975</b>	772	1003
Zinc	ppm	ASTM D5185m 1270	<b>1175</b>	944	1183
Sulfur	ppm	ASTM D5185m 2060	<b>2994</b>	2542	3075

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>9</b>	▲ 69	16
Sodium	ppm	ASTM D5185m	<b>3</b>	2	0
Potassium	ppm	ASTM D5185m >20	<b>2</b>	9	2

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.3	0.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>8.2</b>	9.1	5.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>20.2</b>	24.0	18.7

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.5</b>	21.9	14.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.9</b>	8.0	8.2







# OIL ANALYSIS REPORT

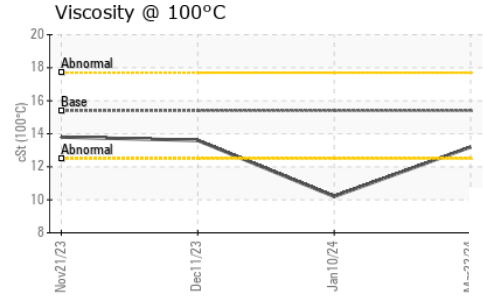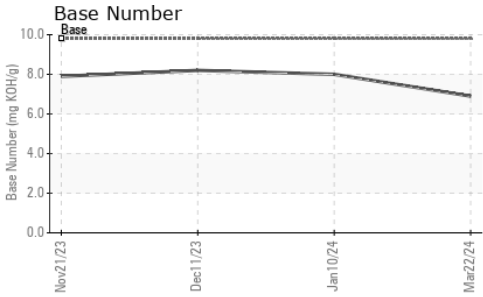

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.2	10.2

## GRAPHS

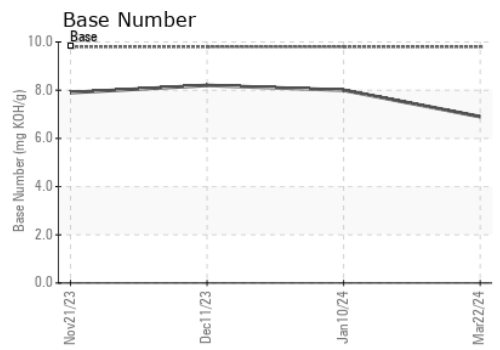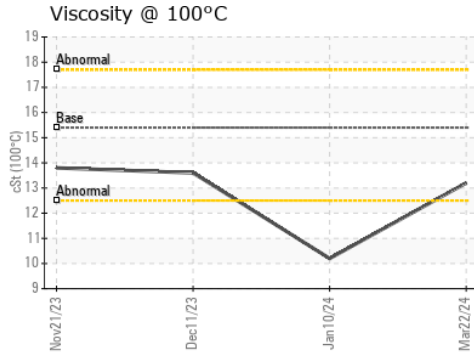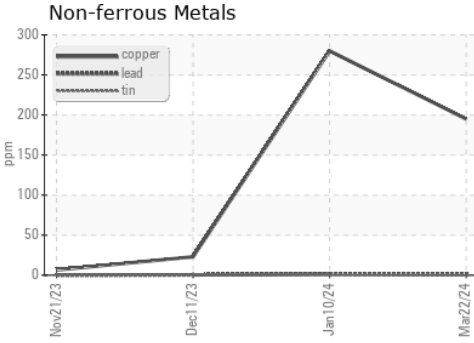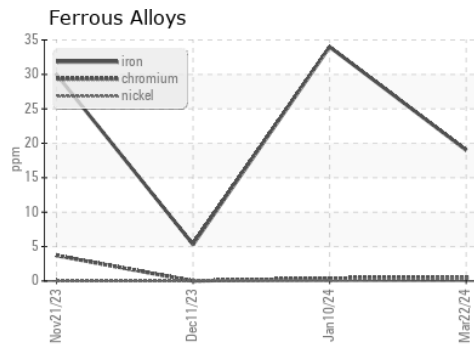

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0108770 **Received** : 26 Mar 2024  
**Lab Number** : 06129307 **Tested** : 27 Mar 2024  
**Unique Number** : 10943458 **Diagnosed** : 27 Mar 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 415 - Michigan East**  
 6200 Elmridge  
 Sterling Heights, MI  
 US 48313  
 Contact: Frank Wolak  
 fwolak@gflenv.com  
 T: (586)825-9514  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)