


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**G.LOPES CONSTRUCTION INC./OFF-ROAD**  
Machine Id  
**L-96**  
Component  
**Rear Right Final Drive**  
Fluid  
**{not provided} (--- GAL)**

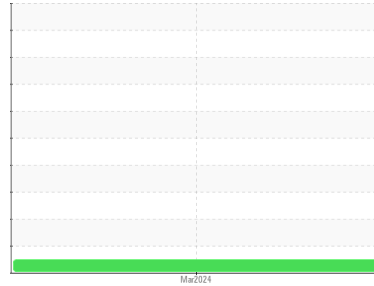

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

| method        | limit/base      | current            | history1 | history2 |
|---------------|-----------------|--------------------|----------|----------|
| Sample Number | Client Info     | <b>PCA0109956</b>  | ---      | ---      |
| Sample Date   | Client Info     | <b>22 Mar 2024</b> | ---      | ---      |
| Machine Age   | hrs Client Info | <b>6491</b>        | ---      | ---      |
| Oil Age       | hrs Client Info | <b>6491</b>        | ---      | ---      |
| Oil Changed   | Client Info     | <b>N/A</b>         | ---      | ---      |
| Sample Status |                 | <b>NORMAL</b>      | ---      | ---      |

## CONTAMINATION

| method | limit/base     | current    | history1 | history2 |
|--------|----------------|------------|----------|----------|
| Water  | WC Method >0.2 | <b>NEG</b> | ---      | ---      |

## WEAR METALS

| method   | limit/base           | current      | history1 | history2 |
|----------|----------------------|--------------|----------|----------|
| Iron     | ppm ASTM D5185m >800 | <b>203</b>   | ---      | ---      |
| Chromium | ppm ASTM D5185m >10  | <b>&lt;1</b> | ---      | ---      |
| Nickel   | ppm ASTM D5185m >5   | <b>&lt;1</b> | ---      | ---      |
| Titanium | ppm ASTM D5185m >15  | <b>&lt;1</b> | ---      | ---      |
| Silver   | ppm ASTM D5185m >2   | <b>0</b>     | ---      | ---      |
| Aluminum | ppm ASTM D5185m >75  | <b>2</b>     | ---      | ---      |
| Lead     | ppm ASTM D5185m >10  | <b>&lt;1</b> | ---      | ---      |
| Copper   | ppm ASTM D5185m >75  | <b>18</b>    | ---      | ---      |
| Tin      | ppm ASTM D5185m >8   | <b>&lt;1</b> | ---      | ---      |
| Vanadium | ppm ASTM D5185m      | <b>0</b>     | ---      | ---      |
| Cadmium  | ppm ASTM D5185m      | <b>0</b>     | ---      | ---      |

## ADDITIVES

| method     | limit/base      | current     | history1 | history2 |
|------------|-----------------|-------------|----------|----------|
| Boron      | ppm ASTM D5185m | <b>0</b>    | ---      | ---      |
| Barium     | ppm ASTM D5185m | <b>0</b>    | ---      | ---      |
| Molybdenum | ppm ASTM D5185m | <b>0</b>    | ---      | ---      |
| Manganese  | ppm ASTM D5185m | <b>3</b>    | ---      | ---      |
| Magnesium  | ppm ASTM D5185m | <b>14</b>   | ---      | ---      |
| Calcium    | ppm ASTM D5185m | <b>2882</b> | ---      | ---      |
| Phosphorus | ppm ASTM D5185m | <b>1072</b> | ---      | ---      |
| Zinc       | ppm ASTM D5185m | <b>1236</b> | ---      | ---      |
| Sulfur     | ppm ASTM D5185m | <b>6504</b> | ---      | ---      |


## CONTAMINANTS

| method    | limit/base           | current  | history1 | history2 |
|-----------|----------------------|----------|----------|----------|
| Silicon   | ppm ASTM D5185m >400 | <b>6</b> | ---      | ---      |
| Sodium    | ppm ASTM D5185m      | <b>3</b> | ---      | ---      |
| Potassium | ppm ASTM D5185m >20  | <b>1</b> | ---      | ---      |

## FLUID DEGRADATION

| method           | limit/base          | current     | history1 | history2 |
|------------------|---------------------|-------------|----------|----------|
| Acid Number (AN) | mg KOH/g ASTM D8045 | <b>1.02</b> | ---      | ---      |

# OIL ANALYSIS REPORT

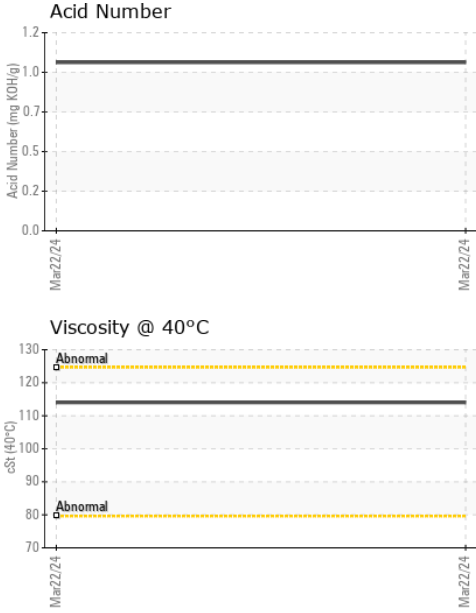


| VISUAL           | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal      | scalar | *Visual    | NONE    | NONE     | ---      |
| Yellow Metal     | scalar | *Visual    | NONE    | NONE     | ---      |
| Precipitate      | scalar | *Visual    | NONE    | NONE     | ---      |
| Silt             | scalar | *Visual    | NONE    | NONE     | ---      |
| Debris           | scalar | *Visual    | NONE    | NONE     | ---      |
| Sand/Dirt        | scalar | *Visual    | NONE    | NONE     | ---      |
| Appearance       | scalar | *Visual    | NORML   | NORML    | ---      |
| Odor             | scalar | *Visual    | NORML   | NORML    | ---      |
| Emulsified Water | scalar | *Visual    | >0.2    | NEG      | ---      |
| Free Water       | scalar | *Visual    |         | NEG      | ---      |

| FLUID PROPERTIES | method | limit/base | current    | history1 | history2 |
|------------------|--------|------------|------------|----------|----------|
| Visc @ 40°C      | cSt    | ASTM D445  | <b>114</b> | ---      | ---      |

| SAMPLE IMAGES | method | limit/base | current | history1 | history2 |
|---------------|--------|------------|---------|----------|----------|
|---------------|--------|------------|---------|----------|----------|

|        |  |  |  |          |          |          |
|--------|--|--|--|----------|----------|----------|
| Color  |  |  |  | no image | no image | no image |
| Bottom |  |  |  | no image | no image | no image |

## GRAPHS

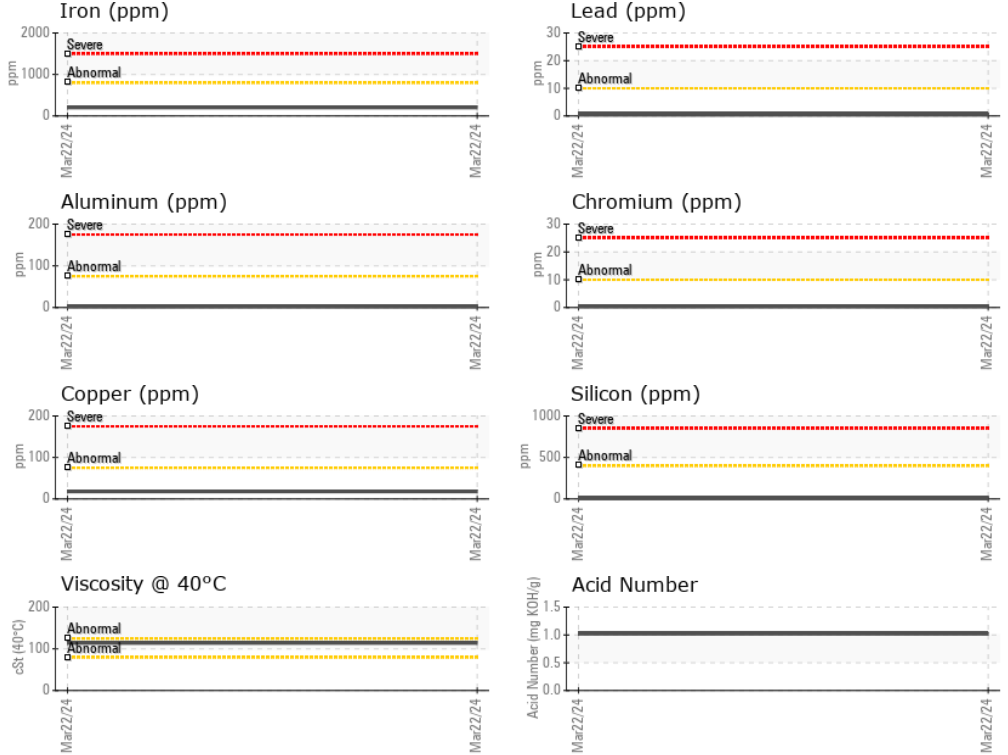

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0109956  
**Lab Number** : 06129528  
**Unique Number** : 10943679  
**Test Package** : MOB 2  
**Received** : 26 Mar 2024  
**Tested** : 27 Mar 2024  
**Diagnosed** : 27 Mar 2024 - Wes Davis

**G LOPES CONSTRUCTION**  
 565 WINTHROP ST  
 TAUNTON, MA  
 US 02780  
 Contact: BUTCH MCGRATH  
 bmcgrath@glopes.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: