


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

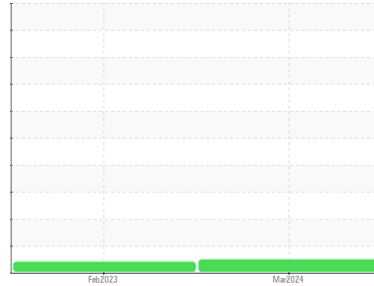

Machine Id
DT823
Component
Rear Differential
Fluid
PETRO CANADA TRAXON SYNTHETIC 75W90 (3 GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			PCA0113150	PCA0091205	---
Sample Date	Client Info			13 Mar 2024	13 Feb 2023	---
Machine Age	mls	Client Info		75265	24693	---
Oil Age	mls	Client Info		75265	24693	---
Oil Changed	Client Info			Changed	Not Changd	---
Sample Status				NORMAL	ABNORMAL	---

CONTAMINATION		method	limit/base	current	history1	history2
Water	WC Method		>.2	NEG	NEG	---


WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>1200	200	149	---
Chromium	ppm	ASTM D5185m	>8	1	1	---
Nickel	ppm	ASTM D5185m	>20	9	7	---
Titanium	ppm	ASTM D5185m	>4	<1	0	---
Silver	ppm	ASTM D5185m		0	0	---
Aluminum	ppm	ASTM D5185m	>30	3	2	---
Lead	ppm	ASTM D5185m	>25	0	0	---
Copper	ppm	ASTM D5185m	>50	1	1	---
Tin	ppm	ASTM D5185m	>5	<1	<1	---
Vanadium	ppm	ASTM D5185m		0	0	---
Cadmium	ppm	ASTM D5185m		0	0	---

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	328	151	172	---
Barium	ppm	ASTM D5185m	1	0	<1	---
Molybdenum	ppm	ASTM D5185m		0	1	---
Manganese	ppm	ASTM D5185m		3	3	---
Magnesium	ppm	ASTM D5185m	1	10	7	---
Calcium	ppm	ASTM D5185m	7	43	44	---
Phosphorus	ppm	ASTM D5185m	1145	1129	988	---
Zinc	ppm	ASTM D5185m	3	18	22	---
Sulfur	ppm	ASTM D5185m	17909	29195	26163	---

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>230	134	114	---
Sodium	ppm	ASTM D5185m		3	4	---
Potassium	ppm	ASTM D5185m	>20	3	1	---

VISUAL		method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	▲ MODER	---
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	NORML	---
Emulsified Water	scalar	*Visual	>.2	NEG	NEG	---
Free Water	scalar	*Visual		NEG	NEG	---

OIL ANALYSIS REPORT

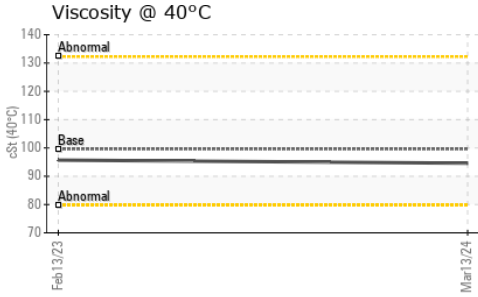




FLUID PROPERTIES	method	limit/base	current	history1	history2
------------------	--------	------------	---------	----------	----------

Visc @ 40°C	cSt	ASTM D445	99.6	94.6	95.7	---
-------------	-----	-----------	------	-------------	------	-----

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color			no image	no image	no image
Bottom			no image	no image	no image

GRAPHS

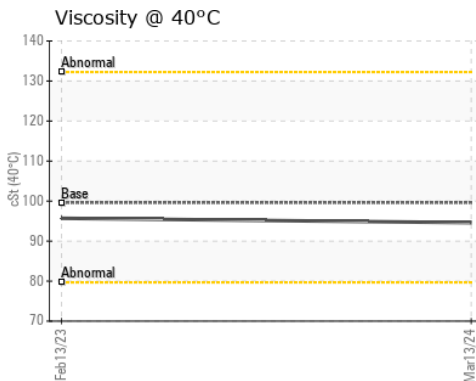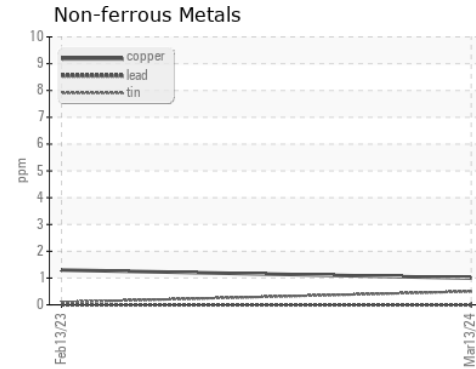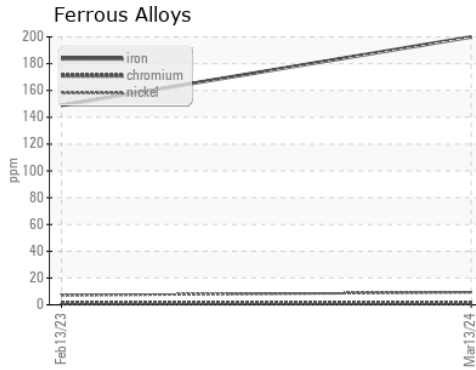

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0113150
Lab Number : 06129674
Unique Number : 10943825
Test Package : FLEET

Received : 26 Mar 2024
Tested : 27 Mar 2024
Diagnosed : 27 Mar 2024 - Wes Davis

NW WHITE & CO - ANDERSON DIVISION
 2605 RIVER RD
 PIEDMONT, SC
 US 29673

Contact: James Threatt
jthreatt@nwwhite.com

T: (864)918-4646

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)