

OIL ANALYSIS REPORT

Sample Rating Trend

WEAR

Area
Dixon Transport-Tractor
 Machine Id
[Dixon Transport-Tractor] 325A325523
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 10W30 (11 GAL)



DIAGNOSIS

Recommendation
 No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear
 The copper level is abnormal. In the absence of other significant wear metals, suspect copper due to sources other than wear (i.e. cooling core). All other metal levels are typical for a new component breaking in.

Contamination
 Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components. No other contaminants were detected in the oil.

Fluid Condition
 The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

| method | limit/base | current | history1 | history2 |
|---------------|-----------------|--------------------|----------|----------|
| Sample Number | Client Info | PCA0114358 | --- | --- |
| Sample Date | Client Info | 14 Mar 2024 | --- | --- |
| Machine Age | mls Client Info | 18734 | --- | --- |
| Oil Age | mls Client Info | 18734 | --- | --- |
| Oil Changed | Client Info | Not Chngd | --- | --- |
| Sample Status | | ABNORMAL | --- | --- |

CONTAMINATION

| method | limit/base | current | history1 | history2 |
|--------|----------------|----------------|----------|----------|
| Fuel | WC Method >5 | <1.0 | --- | --- |
| Water | WC Method >0.2 | NEG | --- | --- |
| Glycol | WC Method | NEG | --- | --- |

WEAR METALS

| method | limit/base | current | history1 | history2 |
|----------|----------------------|--------------|----------|----------|
| Iron | ppm ASTM D5185m >80 | 38 | --- | --- |
| Chromium | ppm ASTM D5185m >5 | 2 | --- | --- |
| Nickel | ppm ASTM D5185m >2 | 3 | --- | --- |
| Titanium | ppm ASTM D5185m | 0 | --- | --- |
| Silver | ppm ASTM D5185m >3 | <1 | --- | --- |
| Aluminum | ppm ASTM D5185m >30 | 15 | --- | --- |
| Lead | ppm ASTM D5185m >30 | 3 | --- | --- |
| Copper | ppm ASTM D5185m >150 | ▲ 284 | --- | --- |
| Tin | ppm ASTM D5185m >5 | 13 | --- | --- |
| Vanadium | ppm ASTM D5185m | <1 | --- | --- |
| Cadmium | ppm ASTM D5185m | 0 | --- | --- |

ADDITIVES

| method | limit/base | current | history1 | history2 |
|------------|----------------------|-------------|----------|----------|
| Boron | ppm ASTM D5185m 2 | 46 | --- | --- |
| Barium | ppm ASTM D5185m 0 | 0 | --- | --- |
| Molybdenum | ppm ASTM D5185m 50 | 40 | --- | --- |
| Manganese | ppm ASTM D5185m 0 | 4 | --- | --- |
| Magnesium | ppm ASTM D5185m 950 | 496 | --- | --- |
| Calcium | ppm ASTM D5185m 1050 | 1798 | --- | --- |
| Phosphorus | ppm ASTM D5185m 995 | 728 | --- | --- |
| Zinc | ppm ASTM D5185m 1180 | 862 | --- | --- |
| Sulfur | ppm ASTM D5185m 2600 | 2517 | --- | --- |

CONTAMINANTS

| method | limit/base | current | history1 | history2 |
|-----------|---------------------|-----------|----------|----------|
| Silicon | ppm ASTM D5185m >20 | 6 | --- | --- |
| Sodium | ppm ASTM D5185m | 5 | --- | --- |
| Potassium | ppm ASTM D5185m >20 | 44 | --- | --- |


INFRA-RED

| method | limit/base | current | history1 | history2 |
|-----------|--------------------------|-------------|----------|----------|
| Soot % | % *ASTM D7844 >3 | 0.3 | --- | --- |
| Nitration | Abs/cm *ASTM D7624 >20 | 7.7 | --- | --- |
| Sulfation | Abs/.1mm *ASTM D7415 >30 | 23.0 | --- | --- |


FLUID DEGRADATION

| method | limit/base | current | history1 | history2 |
|------------------|--------------------------|-------------|----------|----------|
| Oxidation | Abs/.1mm *ASTM D7414 >25 | 21.4 | --- | --- |
| Base Number (BN) | mg KOH/g ASTM D2896 | 8.8 | --- | --- |

OIL ANALYSIS REPORT







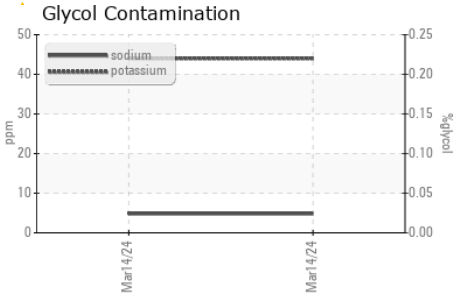


| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|--------------|----------|
| White Metal | scalar | *Visual | NONE | NONE | --- |
| Yellow Metal | scalar | *Visual | NONE | NONE | --- |
| Precipitate | scalar | *Visual | NONE | NONE | --- |
| Silt | scalar | *Visual | NONE | NONE | --- |
| Debris | scalar | *Visual | NONE | NONE | --- |
| Sand/Dirt | scalar | *Visual | NONE | NONE | --- |
| Appearance | scalar | *Visual | NORML | NORML | --- |
| Odor | scalar | *Visual | NORML | NORML | --- |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | --- |
| Free Water | scalar | *Visual | | NEG | --- |

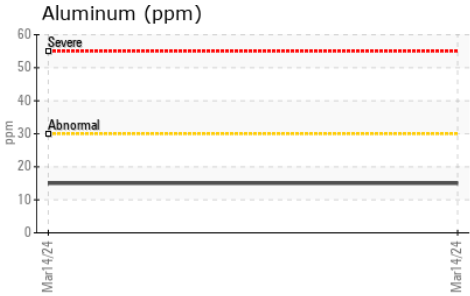

| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|------------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 12.00 | 9.5 | --- |

GRAPHS

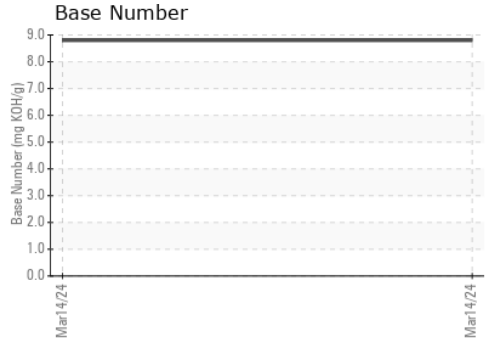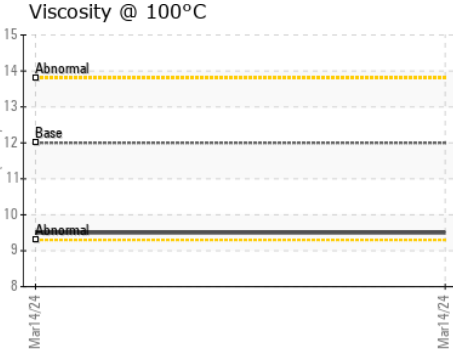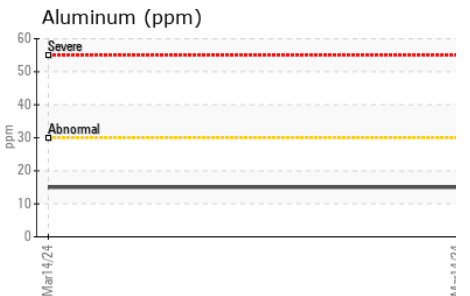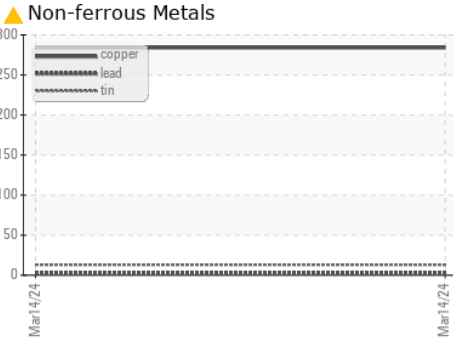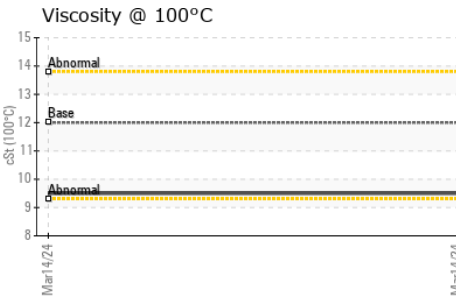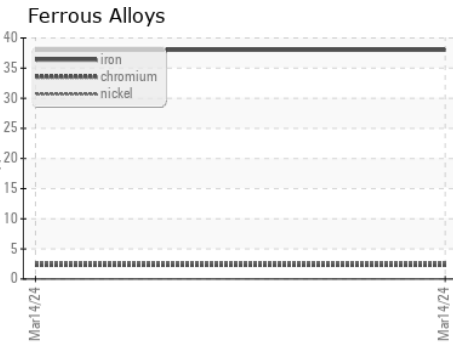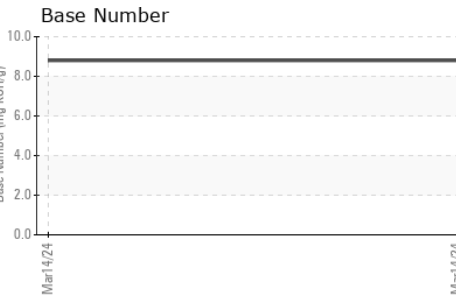

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0114358
Lab Number : **06129792**
Unique Number : 10949257
Test Package : FLEET

Transervice - Shop 3250 - Dixon Transport
 1124 E. River Road
 Dixon, IL
 US 61021
 Contact: Mike Shoemaker
 Shop3250@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: