




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

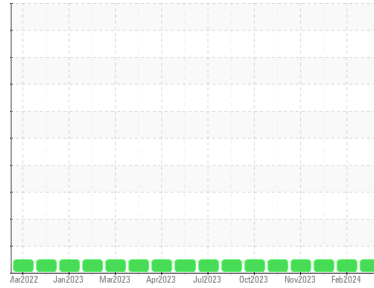

Machine Id  
**912068**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0115370</b>	GFL0110876	GFL0090932
Sample Date	Client Info	<b>20 Mar 2024</b>	12 Feb 2024	19 Dec 2023
Machine Age	hrs	<b>4966</b>	4825	4527
Oil Age	hrs	<b>141</b>	298	154
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >110	<b>8</b>	6	16
Chromium	ppm ASTM D5185m >4	<b>0</b>	0	<1
Nickel	ppm ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm ASTM D5185m	<b>&lt;1</b>	0	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >25	<b>3</b>	3	3
Lead	ppm ASTM D5185m >45	<b>0</b>	0	0
Copper	ppm ASTM D5185m >85	<b>2</b>	<1	3
Tin	ppm ASTM D5185m >4	<b>0</b>	0	<1
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>9</b>	10	1
Barium	ppm ASTM D5185m 0	<b>0</b>	0	9
Molybdenum	ppm ASTM D5185m 60	<b>63</b>	60	63
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>1018</b>	924	941
Calcium	ppm ASTM D5185m 1070	<b>1229</b>	1016	1057
Phosphorus	ppm ASTM D5185m 1150	<b>1096</b>	1035	1055
Zinc	ppm ASTM D5185m 1270	<b>1353</b>	1224	1237
Sulfur	ppm ASTM D5185m 2060	<b>3868</b>	2974	3133

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	<b>6</b>	6	9
Sodium	ppm ASTM D5185m	<b>6</b>	3	0
Potassium	ppm ASTM D5185m >20	<b>3</b>	1	5

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	<b>0.3</b>	0.2	0.3
Nitration	Abs/cm *ASTM D7624 >20	<b>7.0</b>	6.5	7.5
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>18.9</b>	18.6	19.0

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>14.4</b>	14.1	14.6
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>8.4</b>	8.4	7.1







# OIL ANALYSIS REPORT

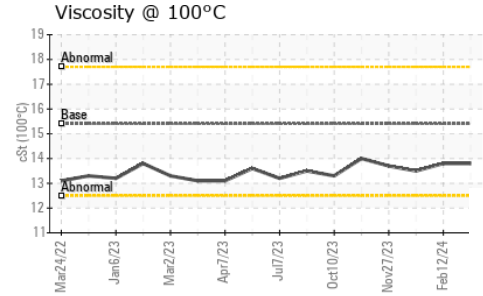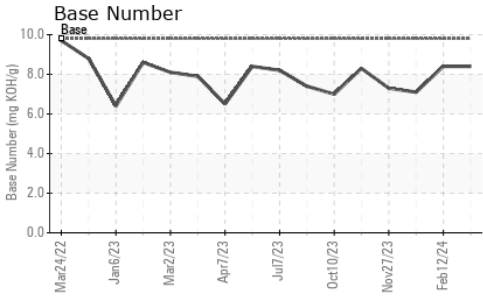

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.8</b>	13.8	13.5

## GRAPHS

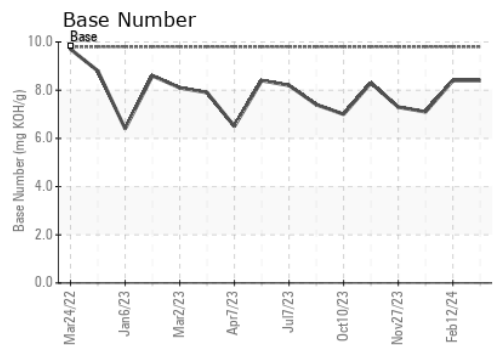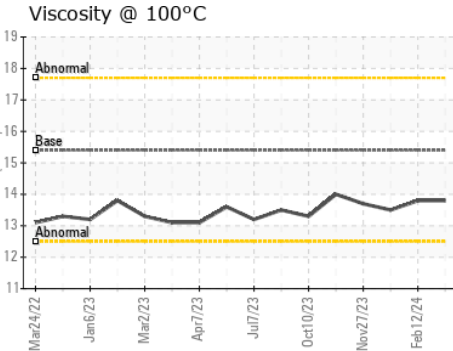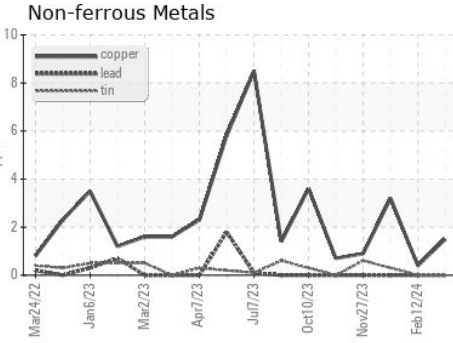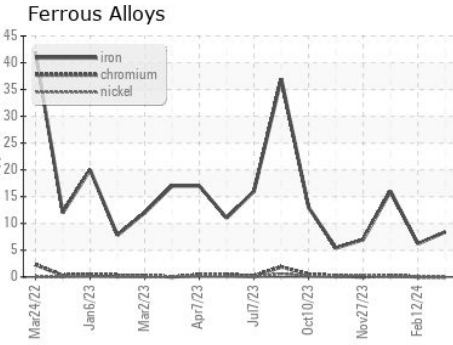

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0115370 **Received** : 26 Mar 2024  
**Lab Number** : **06129893** **Tested** : 27 Mar 2024  
**Unique Number** : 10949358 **Diagnosed** : 27 Mar 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 814 - Little Rock Hauling**  
 4005 Hwy 161 N.  
 Little Rock, AR  
 US 72117  
 Contact: Brad Koenig  
 bkoenig@gflenv.com

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)