




# OIL ANALYSIS REPORT

Sample Rating Trend

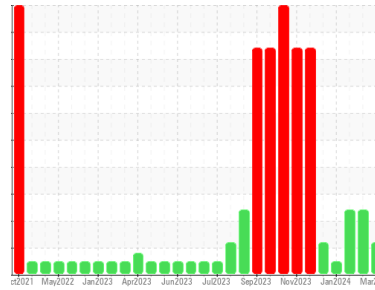

GLYCOL



Machine Id  
**811046**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0115367</b>	GFL0115372	GFL0110881
Sample Date	Client Info		<b>20 Mar 2024</b>	19 Mar 2024	07 Feb 2024
Machine Age	hrs	Client Info	<b>6565</b>	6669	6420
Oil Age	hrs	Client Info	<b>71445</b>	71445	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>ATTENTION</b>	ABNORMAL	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>10</b>	13	9
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >4	<b>0</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>4</b>	5	5
Lead	ppm	ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m >15	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>14</b>	14	15
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>71</b>	73	69
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>1031</b>	1050	1013
Calcium	ppm	ASTM D5185m 1070	<b>1181</b>	1199	1063
Phosphorus	ppm	ASTM D5185m 1150	<b>1085</b>	1098	1077
Zinc	ppm	ASTM D5185m 1270	<b>1361</b>	1398	1269
Sulfur	ppm	ASTM D5185m 2060	<b>3946</b>	3964	3252

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>6</b>	7	7
Sodium	ppm	ASTM D5185m	<b>213</b>	▲ 231	▲ 207
Potassium	ppm	ASTM D5185m >20	<b>36</b>	▲ 39	▲ 34
Glycol	%	*ASTM D2982	<b>NEG</b>	NEG	NEG

## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.5	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.2</b>	7.5	6.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.0</b>	19.4	18.4


## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.2</b>	14.3	13.6
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>9.0</b>	9.0	9.2




# OIL ANALYSIS REPORT


### Glycol Contamination

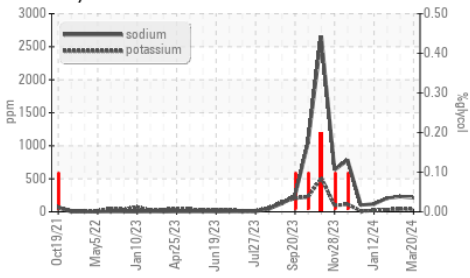

### Viscosity @ 100°C

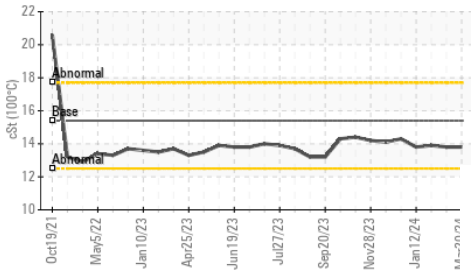

### Glycol Contamination

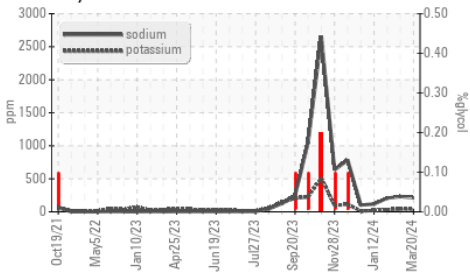


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.8	13.9

### GRAPHS


#### Ferrous Alloys

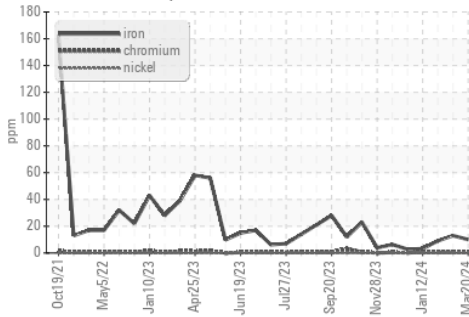


#### Non-ferrous Metals

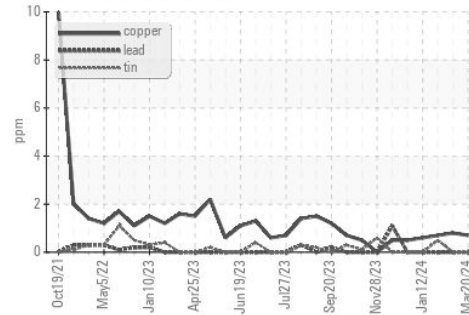

#### Viscosity @ 100°C

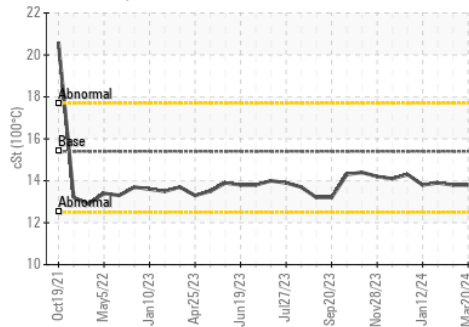

#### Base Number

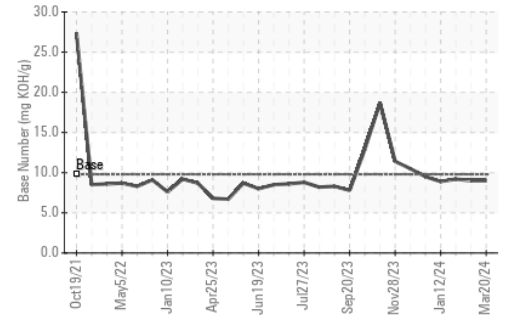

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0115367 Received : 26 Mar 2024  
 Lab Number : 06129894 Tested : 29 Mar 2024  
 Unique Number : 10949359 Diagnosed : 29 Mar 2024 - Jonathan Hester  
 Test Package : FLEET ( Additional Tests: Glycol )

GFL Environmental - 814 - Little Rock Hauling  
 4005 Hwy 161 N.  
 Little Rock, AR  
 US 72117  
 Contact: Brad Koenig  
 bkoenig@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: