




OIL ANALYSIS REPORT

Sample Rating Trend

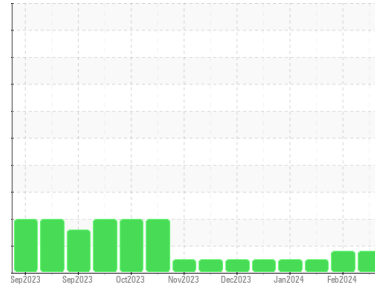

WEAR



Machine Id
914032

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Valve wear is indicated. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0115368	GFL0110875	GFL0046910
Sample Date	Client Info	20 Mar 2024	12 Feb 2024	19 Jan 2024
Machine Age	hrs	1488	1340	1189
Oil Age	hrs	148	151	40
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		ABNORMAL	ABNORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	37	30	27
Chromium	ppm ASTM D5185m >20	1	<1	1
Nickel	ppm ASTM D5185m >4	▲ 14	▲ 11	6
Titanium	ppm ASTM D5185m	<1	0	<1
Silver	ppm ASTM D5185m >3	0	<1	<1
Aluminum	ppm ASTM D5185m >20	3	3	4
Lead	ppm ASTM D5185m >40	<1	0	<1
Copper	ppm ASTM D5185m >330	105	198	247
Tin	ppm ASTM D5185m >15	0	1	2
Vanadium	ppm ASTM D5185m	<1	0	0
Cadmium	ppm ASTM D5185m	0	0	<1

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	4	7	6
Barium	ppm ASTM D5185m 0	0	0	0
Molybdenum	ppm ASTM D5185m 60	63	61	62
Manganese	ppm ASTM D5185m 0	2	2	2
Magnesium	ppm ASTM D5185m 1010	952	877	911
Calcium	ppm ASTM D5185m 1070	1117	964	1011
Phosphorus	ppm ASTM D5185m 1150	906	934	916
Zinc	ppm ASTM D5185m 1270	1219	1130	1139
Sulfur	ppm ASTM D5185m 2060	2639	2224	2534

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	11	12	13
Sodium	ppm ASTM D5185m	10	4	5
Potassium	ppm ASTM D5185m >20	9	6	7

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.7	0.6	0.6
Nitration	Abs/cm *ASTM D7624 >20	10.0	9.4	9.4
Sulfation	Abs/.1mm *ASTM D7415 >30	21.2	20.5	20.1


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	17.5	16.8	16.5
Base Number (BN)	mg KOH/g ASTM D2896 9.8	5.9	6.4	7.0




OIL ANALYSIS REPORT


▲ Ferrous Alloys

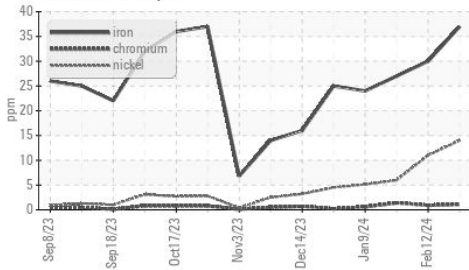

Base Number

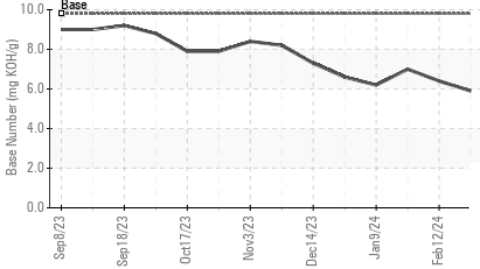

Viscosity @ 100°C

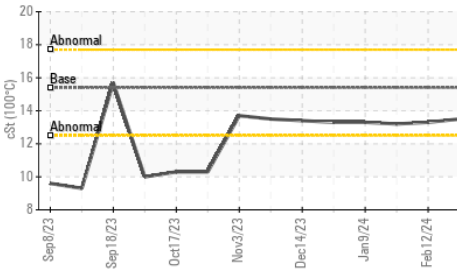


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.5	13.3

GRAPHS


▲ Ferrous Alloys

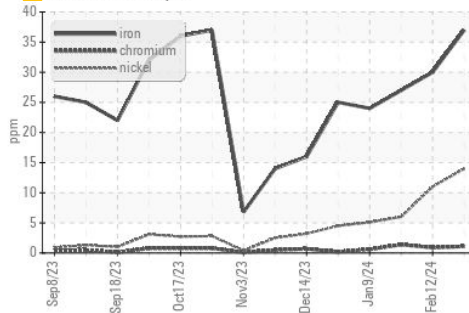



Non-ferrous Metals

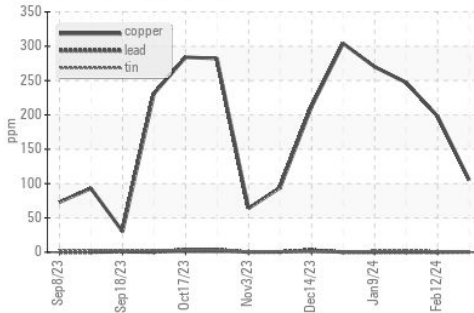

Viscosity @ 100°C

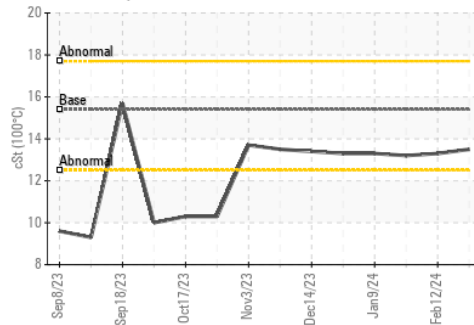

Base Number

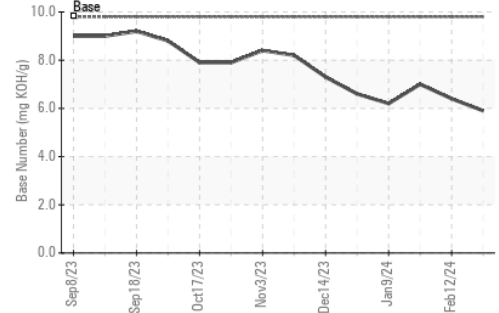

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0115368
Lab Number : 06129895
Unique Number : 10949360
Test Package : FLEET

GFL Environmental - 814 - Little Rock Hauling
 4005 Hwy 161 N.
 Little Rock, AR
 US 72117
 Contact: Brad Koenig
 bkoenig@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: