




# OIL ANALYSIS REPORT

Sample Rating Trend

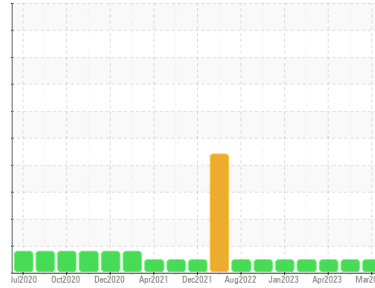

**NORMAL**



Area  
**(P694407)**  
 Machine Id  
**810013**

Component  
**Natural Gas Engine**

Fluid  
**PETRO CANADA DURON GEO LD 15W40 (30 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	<b>GFL0101760</b>	GFL0090072	GFL0070784	
Sample Date	Client Info	<b>26 Mar 2024</b>	02 Nov 2023	27 Apr 2023	
Machine Age	hrs	Client Info	<b>8951</b>	8372	7234
Oil Age	hrs	Client Info	<b>600</b>	600	600
Oil Changed	Client Info	<b>Changed</b>	Changed	N/A	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

## CONTAMINATION

method	limit/base	current	history1	history2
Water	WC Method >0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m >50	<b>13</b>	5	5
Chromium	ppm	ASTM D5185m >4	<b>1</b>	<1	0
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >9	<b>2</b>	<1	<1
Lead	ppm	ASTM D5185m >30	<b>1</b>	0	0
Copper	ppm	ASTM D5185m >35	<b>2</b>	1	<1
Tin	ppm	ASTM D5185m >4	<b>1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m 50	<b>26</b>	39	34
Barium	ppm	ASTM D5185m 5	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m 50	<b>51</b>	48	52
Manganese	ppm	ASTM D5185m 0	<b>1</b>	<1	<1
Magnesium	ppm	ASTM D5185m 560	<b>548</b>	533	618
Calcium	ppm	ASTM D5185m 1510	<b>1541</b>	1461	1688
Phosphorus	ppm	ASTM D5185m 780	<b>816</b>	667	800
Zinc	ppm	ASTM D5185m 870	<b>925</b>	888	1003
Sulfur	ppm	ASTM D5185m 2040	<b>2467</b>	2296	2753

## CONTAMINANTS

method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m >+100	<b>7</b>	6	5
Sodium	ppm	ASTM D5185m	<b>2</b>	6	6
Potassium	ppm	ASTM D5185m >20	<b>2</b>	0	0

## INFRA-RED



method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	<b>0</b>	0.1	0
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.2</b>	7.8	7.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.4</b>	18.7	17.4

## FLUID DEGRADATION

method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.7</b>	16.4	15.7
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	<b>7.0</b>	8.7	7.3







# OIL ANALYSIS REPORT

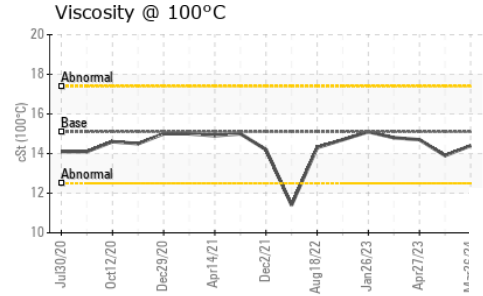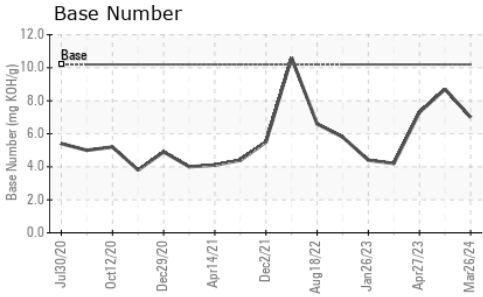

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.1	<b>14.4</b>	13.9	14.7

## GRAPHS

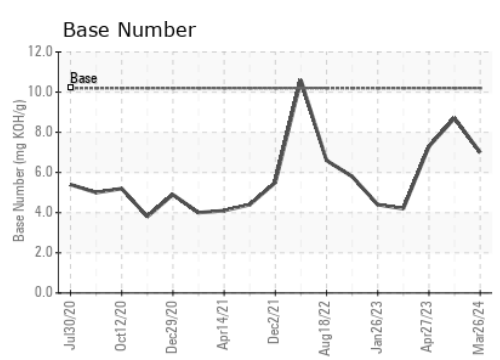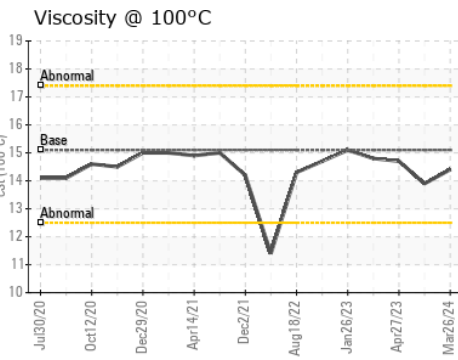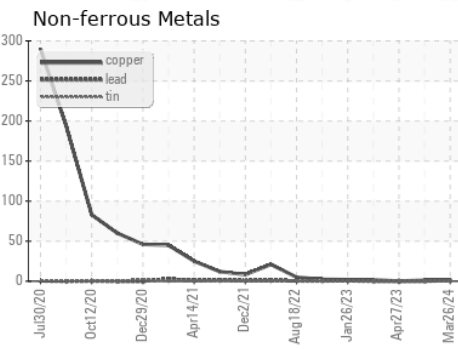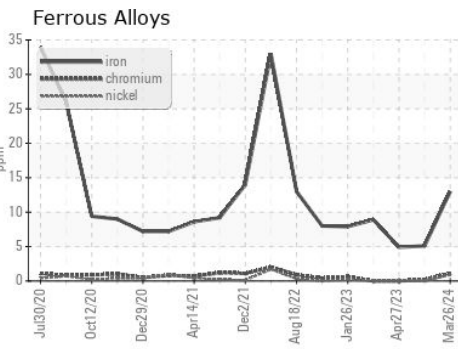

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0101760  
**Lab Number** : **06130135**  
**Unique Number** : 10949600  
**Test Package** : FLEET  
**Received** : 27 Mar 2024  
**Tested** : 27 Mar 2024  
**Diagnosed** : 27 Mar 2024 - Wes Davis

**GFL Environmental - 030 - Conway Myrtle Beach**  
 3010 HWY 378  
 Conway, SC  
 US 29527  
 Contact: ARCILIO RUEZ  
 aruiz@gflenv.com  
 T:  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)