




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**(63A3YA5)**  
Machine Id  
**411001-411001**  
Component  
**Diesel Engine**  
Fluid  
**CHEVRON DELO 400 MULTIGRADE 15W40 (--- LTR)**

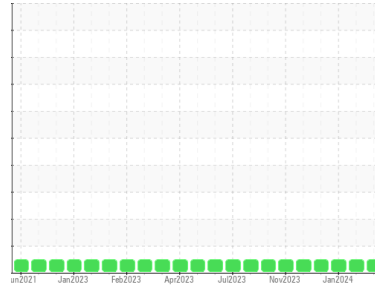

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0103459</b>	GFL0103447	GFL0103442
Sample Date	Client Info	<b>21 Mar 2024</b>	07 Feb 2024	25 Jan 2024
Machine Age	hrs	<b>8429</b>	8182	8092
Oil Age	hrs	<b>629</b>	382	292
Oil Changed	Client Info	<b>N/A</b>	N/A	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	<b>2</b>	3	5
Chromium	ppm ASTM D5185m >20	<b>0</b>	0	<1
Nickel	ppm ASTM D5185m >15	<b>0</b>	<1	<1
Titanium	ppm ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>1</b>	3	3
Lead	ppm ASTM D5185m >40	<b>0</b>	<1	<1
Copper	ppm ASTM D5185m >330	<b>&lt;1</b>	2	2
Tin	ppm ASTM D5185m >15	<b>0</b>	<1	<1
Vanadium	ppm ASTM D5185m	<b>&lt;1</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 151	<b>16</b>	22	28
Barium	ppm ASTM D5185m 0.4	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 250	<b>68</b>	70	75
Manganese	ppm ASTM D5185m	<b>0</b>	<1	<1
Magnesium	ppm ASTM D5185m 0	<b>848</b>	797	865
Calcium	ppm ASTM D5185m 2046	<b>1103</b>	994	1083
Phosphorus	ppm ASTM D5185m 1043	<b>844</b>	886	968
Zinc	ppm ASTM D5185m 943	<b>1172</b>	1105	1174
Sulfur	ppm ASTM D5185m 5012	<b>3372</b>	2702	2949

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>3</b>	4	4
Sodium	ppm ASTM D5185m	<b>6</b>	3	3
Potassium	ppm ASTM D5185m >20	<b>2</b>	2	4

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	<b>0.2</b>	0.3	0.2
Nitration	Abs/cm *ASTM D7624 >20	<b>6.6</b>	7.8	7.0
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>17.3</b>	18.4	18.1

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>13.5</b>	14.4	14.0
Base Number (BN)	mg KOH/g ASTM D2896 12.5	<b>8.1</b>	7.7	8.2








# OIL ANALYSIS REPORT

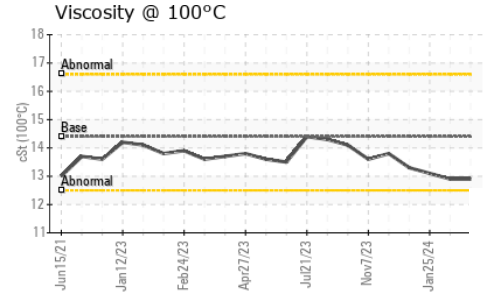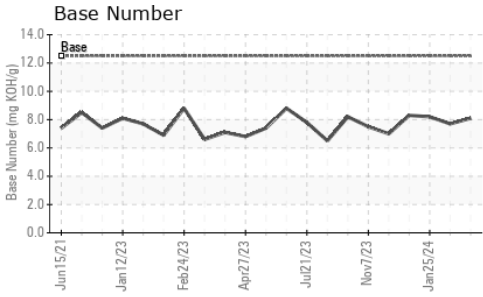

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>12.9</b>	12.9	13.1

## GRAPHS

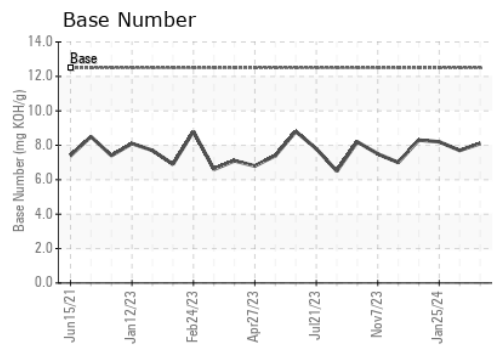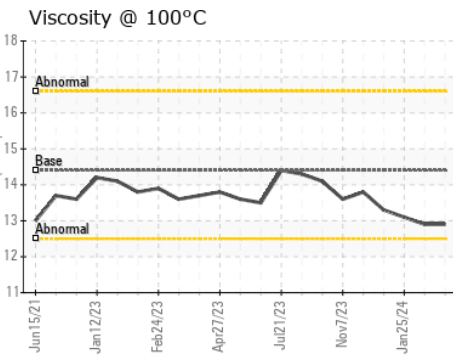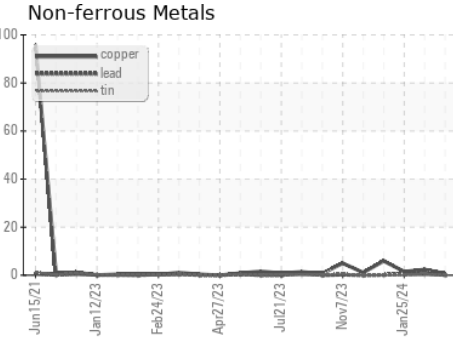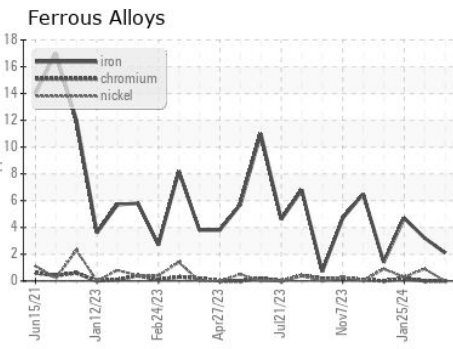

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0103459      **Received** : 27 Mar 2024  
**Lab Number** : **06130234**      **Tested** : 27 Mar 2024  
**Unique Number** : 10949699      **Diagnosed** : 29 Mar 2024 - Don Baldrige  
**Test Package** : FLEET

**GFL Environmental - 180 - Tuscaloosa Hauling**  
 4701 12TH ST NE  
 Tuscaloosa, AL  
 US 35404  
 Contact: FREDERICK ROGERS  
 fred.rogers@gflenv.com  
 T:  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)