




OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL

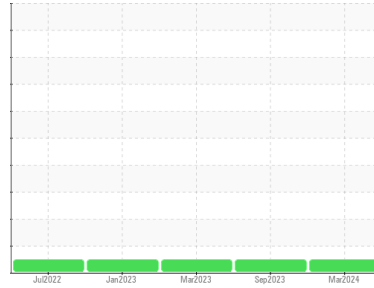

Machine Id
124004-753

Component
Diesel Engine

Fluid
CHEVRON DELO 400 XLE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

Metal levels are typical for a new component breaking in.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0110970	GFL0084504	GFL0073519
Sample Date	Client Info	22 Mar 2024	08 Sep 2023	07 Mar 2023
Machine Age	hrs	10618	10082	9186
Oil Age	hrs	536	896	620
Oil Changed	Client Info	Changed	Changed	Changed
Sample Status		NORMAL	NORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >100	10	16	7
Chromium	ppm ASTM D5185m >20	<1	2	<1
Nickel	ppm ASTM D5185m >4	0	0	0
Titanium	ppm ASTM D5185m	11	14	10
Silver	ppm ASTM D5185m >3	0	0	0
Aluminum	ppm ASTM D5185m >20	2	<1	2
Lead	ppm ASTM D5185m >40	0	1	2
Copper	ppm ASTM D5185m >330	<1	<1	<1
Tin	ppm ASTM D5185m >15	0	<1	<1
Vanadium	ppm ASTM D5185m	<1	<1	<1
Cadmium	ppm ASTM D5185m	0	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m	116	53	82
Barium	ppm ASTM D5185m	0	0	0
Molybdenum	ppm ASTM D5185m	52	48	45
Manganese	ppm ASTM D5185m	<1	<1	<1
Magnesium	ppm ASTM D5185m	674	758	670
Calcium	ppm ASTM D5185m	1572	1829	1619
Phosphorus	ppm ASTM D5185m 760	689	734	697
Zinc	ppm ASTM D5185m 830	945	892	849
Sulfur	ppm ASTM D5185m 2770	3452	3828	3684

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	6	9	8
Sodium	ppm ASTM D5185m	5	5	4
Potassium	ppm ASTM D5185m >20	5	6	2

INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.3	0.4	0.3
Nitration	Abs/cm *ASTM D7624 >20	10.9	11.6	9.4
Sulfation	Abs/.1mm *ASTM D7415 >30	21.7	22.7	19.5

FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	17.4	18.1	14.9
Base Number (BN)	mg KOH/g ASTM D2896 10.7	6.6	6.4	7.5







OIL ANALYSIS REPORT

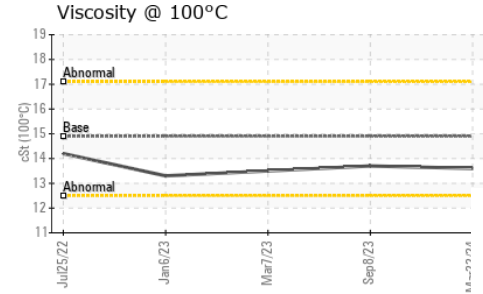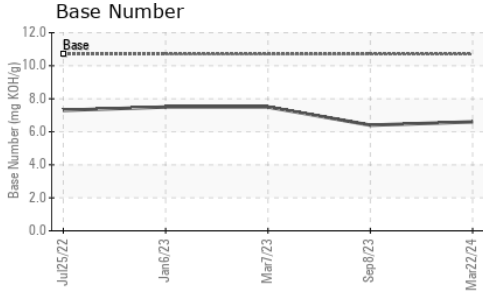

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.9	13.6	13.7	13.5

GRAPHS

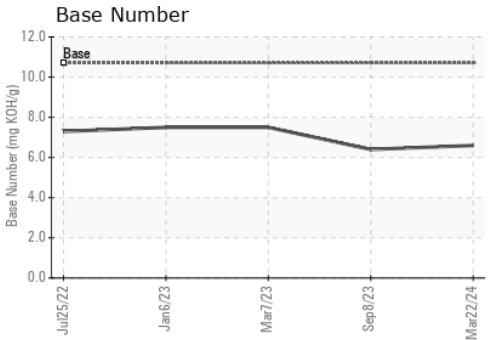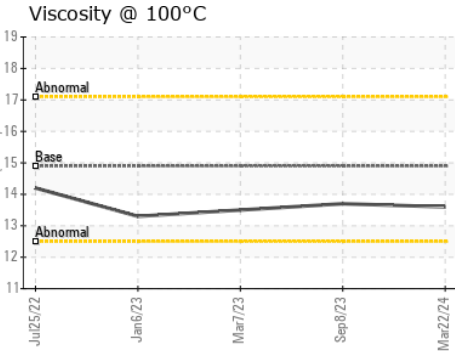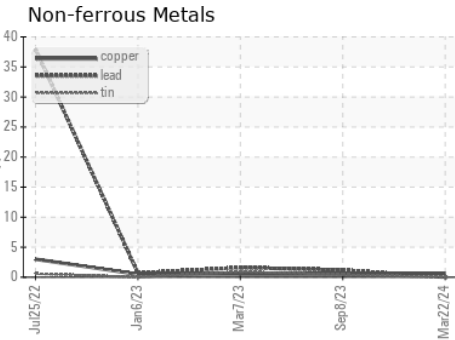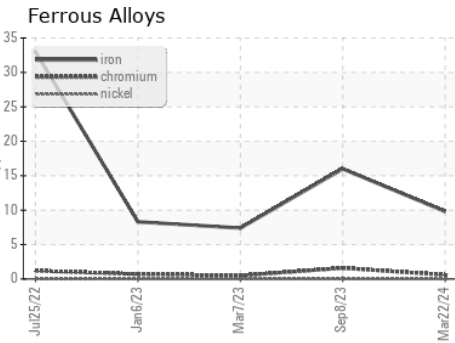

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0110970
Lab Number : **06130245**
Unique Number : 10949710
Test Package : FLEET

Received : 27 Mar 2024
Tested : 27 Mar 2024
Diagnosed : 27 Mar 2024 - Wes Davis

GFL Environmental - 629 - Northern A1
 3947 US 131 N
 Kalkaska, MI
 US 49646-8428
Contact: MITCH HERSHBERGER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (231)624-0848

F: