



PROBLEM SUMMARY

Sample Rating Trend


GLYCOL



Machine Id
726047-310048


Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

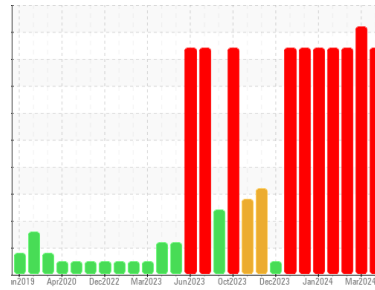

COMPONENT CONDITION SUMMARY

▲ Glycol Contamination

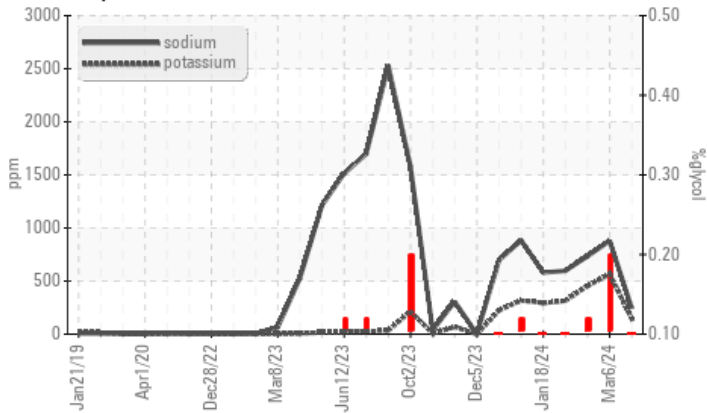

RECOMMENDATION

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

PROBLEMATIC TEST RESULTS

Sample Status				SEVERE	SEVERE	SEVERE
Sodium	ppm	ASTM D5185m		▲ 246	● 879	● 734
Potassium	ppm	ASTM D5185m >20		▲ 144	▲ 567	▲ 454
Glycol	%	*ASTM D2982		▲ 0.10	▲ 0.20	▲ 0.12

Customer Id: GFL821
Sample No.: GFL0105107
Lab Number: 06130393
Test Package: FLEET



To manage this report scan the QR code

To discuss the diagnosis or test data:
Jonathan Hester +1 919-379-4092 x4092
jhester@wearcheckusa.com

To change component or sample information:
Customer Service +1 1-800-237-1369
customerservice@wearcheck.com

RECOMMENDED ACTIONS

Action	Status	Date	Done By	Description
Resample	---	---	?	We recommend an early resample to monitor this condition.
Check Glycol Access	---	---	?	We advise that you check for the source of the coolant leak.

HISTORICAL DIAGNOSIS

06 Mar 2024 Diag: Wes Davis

GLYCOL



We advise that you check for the source of the coolant leak. The oil change at the time of sampling has been noted. Confirm the source of the lubricant being utilized for top-up/fill. We recommend an early resample to monitor this condition. All component wear rates are normal. Test for glycol is positive. There is a high concentration of glycol present in the oil. Additive levels indicate the addition of a different brand, or type of oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

[view report](#)



14 Feb 2024 Diag: Wes Davis

GLYCOL



We advise that you check for the source of the coolant leak. We recommend that you drain the oil from the component if this has not already been done. We advise that you flush the component thoroughly before re-filling with oil. We recommend an early resample to monitor this condition. All component wear rates are normal. Test for glycol is positive. There is a high concentration of glycol present in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

[view report](#)



02 Feb 2024 Diag: Sean Felton

GLYCOL



We advise that you check for the source of the coolant leak. We recommend that you drain the oil from the component if this has not already been done. We advise that you flush the component thoroughly before re-filling with oil. We recommend an early resample to monitor this condition. All component wear rates are normal. Test for glycol is positive. There is a high concentration of glycol present in the oil. The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.


[view report](#)





OIL ANALYSIS REPORT

Sample Rating Trend

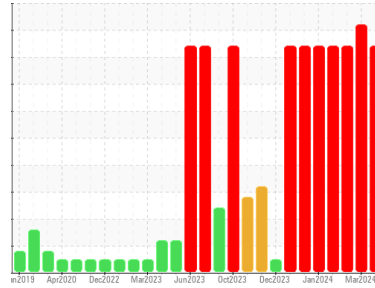

GLYCOL



Machine Id
726047-310048

Component
Diesel Engine

Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

▲ Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

▲ Contamination

Sodium and/or potassium levels remain high. Test for glycol is positive.

▲ Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL0105107	GFL0105325	GFL0105265
Sample Date	Client Info	25 Mar 2024	06 Mar 2024	14 Feb 2024
Machine Age	hrs	20973	20807	20692
Oil Age	hrs	300	600	300
Oil Changed	Client Info	Not Changed	Changed	Not Changed
Sample Status		SEVERE	SEVERE	SEVERE

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >5	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >110	13	32	25
Chromium	ppm ASTM D5185m >4	1	1	2
Nickel	ppm ASTM D5185m >2	<1	0	<1
Titanium	ppm ASTM D5185m	<1	0	0
Silver	ppm ASTM D5185m >2	0	0	0
Aluminum	ppm ASTM D5185m >25	1	2	4
Lead	ppm ASTM D5185m >45	<1	0	1
Copper	ppm ASTM D5185m >85	<1	0	1
Tin	ppm ASTM D5185m >4	<1	0	<1
Vanadium	ppm ASTM D5185m	<1	0	<1
Cadmium	ppm ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<1	0	6
Barium	ppm ASTM D5185m 0	<1	0	<1
Molybdenum	ppm ASTM D5185m 60	81	175	154
Manganese	ppm ASTM D5185m 0	<1	0	<1
Magnesium	ppm ASTM D5185m 1010	870	802	855
Calcium	ppm ASTM D5185m 1070	1045	926	951
Phosphorus	ppm ASTM D5185m 1150	1071	730	882
Zinc	ppm ASTM D5185m 1270	1171	970	1166
Sulfur	ppm ASTM D5185m 2060	3197	2615	2907

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >30	5	4	5
Sodium	ppm ASTM D5185m	▲ 246	879	734
Potassium	ppm ASTM D5185m >20	▲ 144	567	454
Glycol	% *ASTM D2982	▲ 0.10	0.20	0.12

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >3	0.3	0.7	0.6
Nitration	Abs/cm *ASTM D7624 >20	7.8	13.2	12.1
Sulfation	Abs.1mm *ASTM D7415 >30	19.3	22.8	21.2


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs.1mm *ASTM D7414 >25	15.5	20.1	18.4
Base Number (BN)	mg KOH/g ASTM D2896 9.8	8.4	9.0	9.6




OIL ANALYSIS REPORT


Glycol Contamination

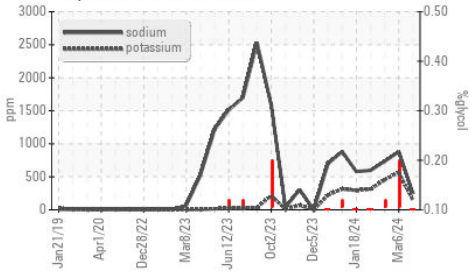

Base Number

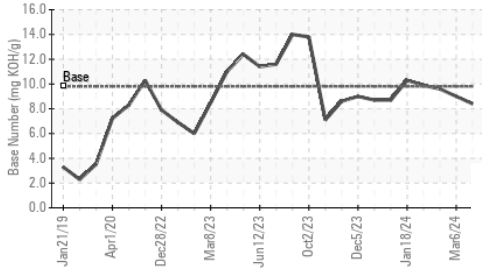

Viscosity @ 100°C

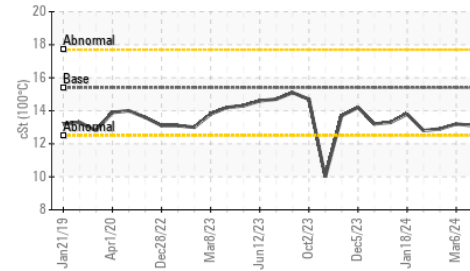

VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	13.1	13.2

GRAPHS


Ferrous Alloys

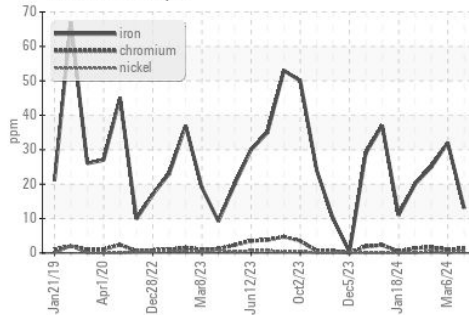


Non-ferrous Metals

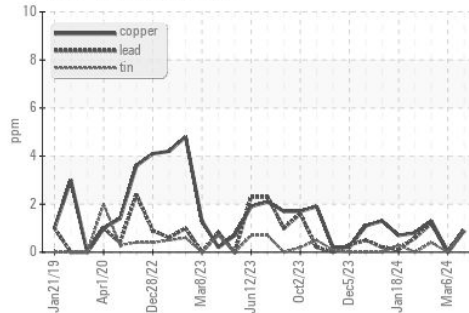

Viscosity @ 100°C

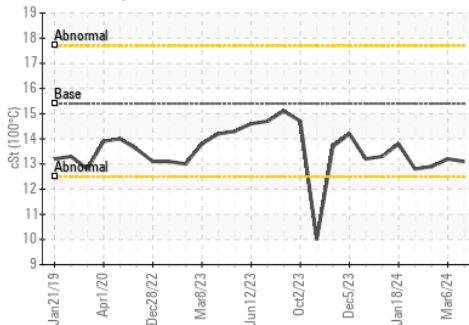

Base Number

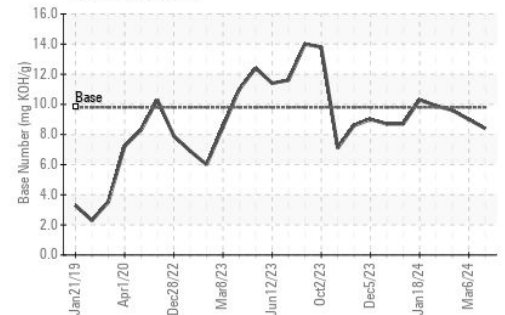

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0105107
 Lab Number : 06130393
 Unique Number : 10949858
 Test Package : FLEET

Received : 27 Mar 2024
 Tested : 01 Apr 2024
 Diagnosed : 01 Apr 2024 - Jonathan Hester

GFL Environmental - 821 - Ozarks Hauling
 33924 Olath Drive
 Lebanon, MO
 US 65536

Contact: Landen Johnson
 landen.johnson@gflenv.com

T: (417)664-0010

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)