


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

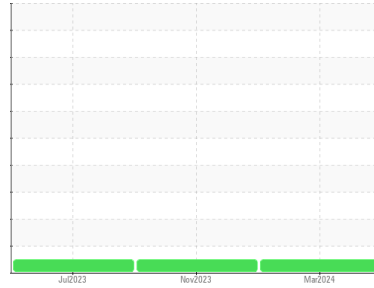

Area  
**(AU693W) Supermarket - Tractor**  
Machine Id  
**FREIGHTLINER 107A1869**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA DURON SHP 10W30 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0116983</b>	PCA0111002	PCA0099842
Sample Date	Client Info		<b>20 Mar 2024</b>	15 Nov 2023	14 Jul 2023
Machine Age	mls	Client Info	<b>20129</b>	192491	180528
Oil Age	mls	Client Info	<b>8807</b>	11963	9568
Oil Changed	Client Info		<b>Changed</b>	Changed	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>11</b>	13	6
Chromium	ppm	ASTM D5185m >5	<b>1</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>&lt;1</b>	0	0
Aluminum	ppm	ASTM D5185m >30	<b>5</b>	6	4
Lead	ppm	ASTM D5185m >30	<b>&lt;1</b>	0	0
Copper	ppm	ASTM D5185m >150	<b>4</b>	4	3
Tin	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>7</b>	4	0
Barium	ppm	ASTM D5185m 0	<b>0</b>	3	0
Molybdenum	ppm	ASTM D5185m 50	<b>69</b>	68	68
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	<1
Magnesium	ppm	ASTM D5185m 950	<b>912</b>	876	967
Calcium	ppm	ASTM D5185m 1050	<b>1139</b>	1050	1152
Phosphorus	ppm	ASTM D5185m 995	<b>1007</b>	968	1057
Zinc	ppm	ASTM D5185m 1180	<b>1212</b>	1167	1309
Sulfur	ppm	ASTM D5185m 2600	<b>3052</b>	3044	3793

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>5</b>	5	4
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	0	<1
Potassium	ppm	ASTM D5185m >20	<b>4</b>	6	2



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.4</b>	0.8	0.4
Nitration	Abs/cm	*ASTM D7624 >20	<b>6.4</b>	8.3	6.5
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.2</b>	19.9	18.4

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.8</b>	15.2	13.6
Base Number (BN)	mg KOH/g	ASTM D2896	<b>8.7</b>	7.2	8.5





# OIL ANALYSIS REPORT

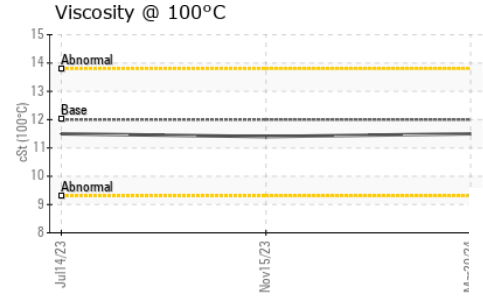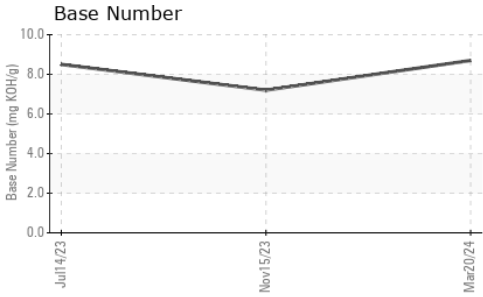

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.5</b>	11.4	11.5

## GRAPHS

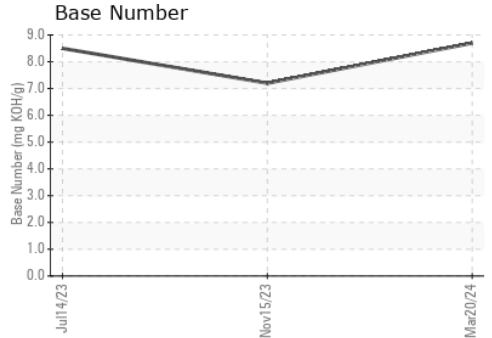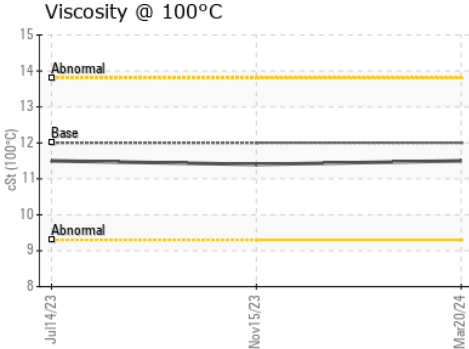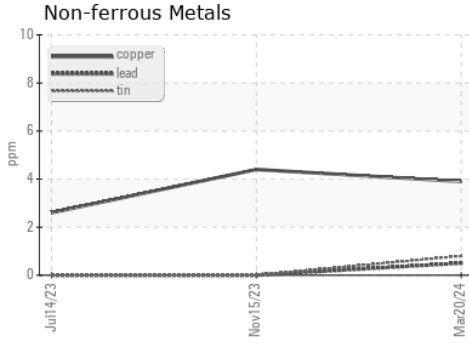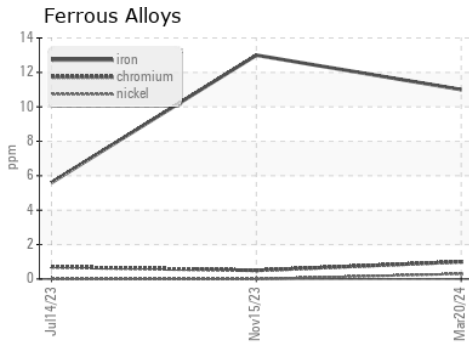

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0116983  
**Lab Number** : **06131781**  
**Unique Number** : 10951246  
**Test Package** : FLEET  
**Received** : 28 Mar 2024  
**Tested** : 29 Mar 2024  
**Diagnosed** : 29 Mar 2024 - Wes Davis

**Transervice - Shop 1071 - Supermarket-Dayton**  
 60 A Tower Road  
 Dayton, NJ  
 US 08810  
 Contact: Brian Quinn  
 bquinn@transervice.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: