




OIL ANALYSIS REPORT

Sample Rating Trend

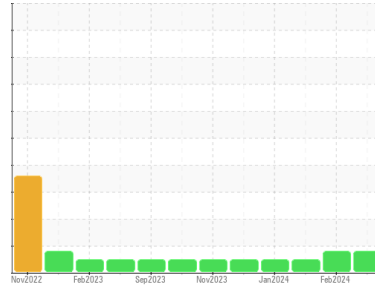

WEAR



Area
(34745UA)
Machine Id
913006

Component
Diesel Engine
Fluid
DIESEL ENGINE OIL SAE 40 (--- GAL)

DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

Valve wear is indicated. All other component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	GFL011866	GFL0108288	GFL0108319
Sample Date	Client Info	27 Mar 2024	15 Feb 2024	17 Jan 2024
Machine Age	hrs	Client Info	4051	3891
Oil Age	hrs	Client Info	4051	3891
Oil Changed	Client Info	Not Chngd	Not Chngd	Not Chngd
Sample Status		ABNORMAL	ABNORMAL	NORMAL

CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<1.0	<1.0	<1.0
Water	WC Method >0.2	NEG	NEG	NEG
Glycol	WC Method	NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	15	13	8
Chromium	ppm ASTM D5185m >20	1	<1	<1
Nickel	ppm ASTM D5185m >5	▲ 12	▲ 9	5
Titanium	ppm ASTM D5185m >2	<1	<1	0
Silver	ppm ASTM D5185m >2	<1	0	0
Aluminum	ppm ASTM D5185m >20	2	2	1
Lead	ppm ASTM D5185m >40	<1	0	0
Copper	ppm ASTM D5185m >330	20	22	9
Tin	ppm ASTM D5185m >15	1	<1	<1
Vanadium	ppm ASTM D5185m	<1	0	<1
Cadmium	ppm ASTM D5185m	<1	0	0

ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	11	9	15
Barium	ppm ASTM D5185m 10	0	0	0
Molybdenum	ppm ASTM D5185m 100	61	55	61
Manganese	ppm ASTM D5185m	1	<1	<1
Magnesium	ppm ASTM D5185m 450	869	851	993
Calcium	ppm ASTM D5185m 3000	1137	1057	1171
Phosphorus	ppm ASTM D5185m 1150	984	944	1097
Zinc	ppm ASTM D5185m 1350	1166	1136	1326
Sulfur	ppm ASTM D5185m 4250	3001	2837	3475

CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	8	5	5
Sodium	ppm ASTM D5185m >216	1	1	<1
Potassium	ppm ASTM D5185m >20	7	6	4

INFRA-RED

method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	0.3	0.3	0.2
Nitration	Abs/cm *ASTM D7624 >20	7.5	7.8	6.4
Sulfation	Abs/.1mm *ASTM D7415 >30	19.1	19.4	17.8


FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	15.0	15.0	13.6
Base Number (BN)	mg KOH/g ASTM D2896 8.5	7.7	7.4	9.2




OIL ANALYSIS REPORT


▲ Ferrous Alloys

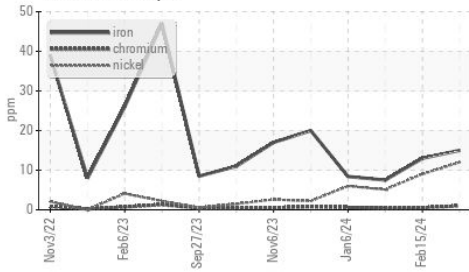

Base Number

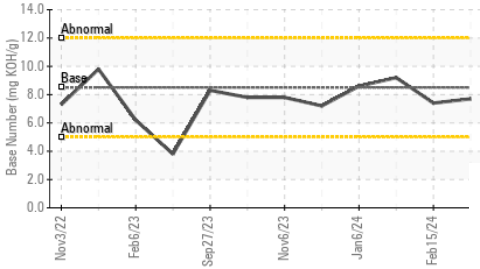

Viscosity @ 100°C

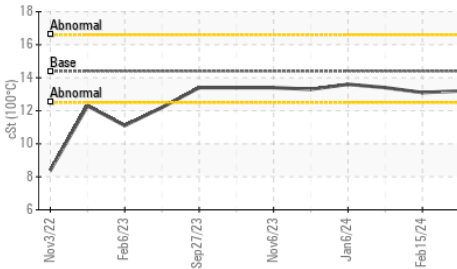

VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	14.4	13.2	13.1

GRAPHS


▲ Ferrous Alloys

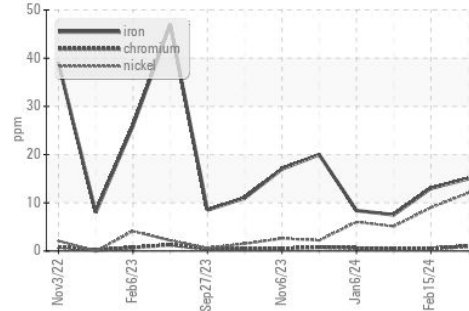


Non-ferrous Metals

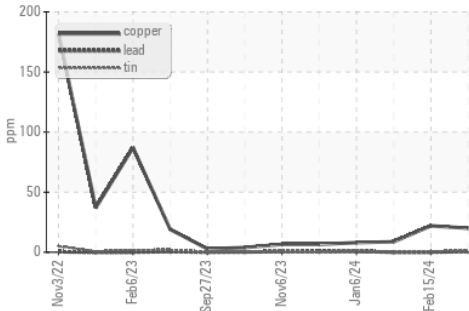

Viscosity @ 100°C

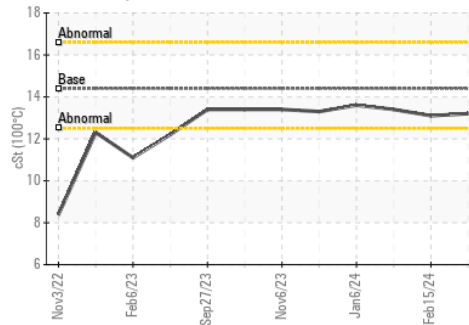

Base Number

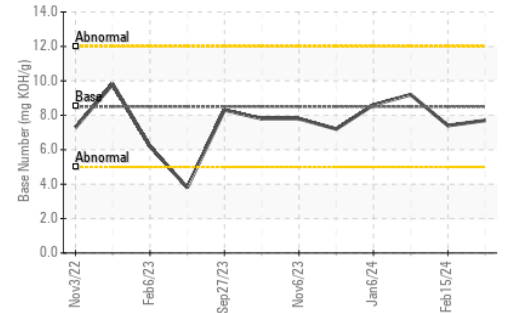

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0111866
 Lab Number : 06131785
 Unique Number : 10951250
 Test Package : FLEET

Received : 28 Mar 2024
 Tested : 29 Mar 2024
 Diagnosed : 02 Apr 2024 - Don Baldrige

GFL Environmental - 652 - Fredericksburg Hauling
 10954 Houser Drive
 Fredericksburg, VA
 US 22408
 Contact: WILLIAM MILO
 wmilo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: