


OIL ANALYSIS REPORT

Sample Rating Trend



NORMAL

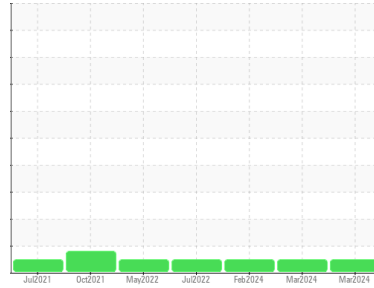

Machine Id
SPC-02

Component
Diesel Engine

Fluid
PETRO CANADA DURON HP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. Please specify the component make and model with your next sample.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0118453	PCA0118507	PCA0118524
Sample Date	Client Info		25 Mar 2024	01 Mar 2024	18 Feb 2024
Machine Age	hrs	Client Info	8555	8072	7813
Oil Age	hrs	Client Info	483	259	253
Oil Changed	Client Info		Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	12	8	4
Chromium	ppm	ASTM D5185m >20	0	<1	0
Nickel	ppm	ASTM D5185m >4	0	<1	<1
Titanium	ppm	ASTM D5185m	0	<1	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	1	2	2
Lead	ppm	ASTM D5185m >40	0	<1	0
Copper	ppm	ASTM D5185m >330	2	2	<1
Tin	ppm	ASTM D5185m >15	0	<1	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<1	<1	5
Barium	ppm	ASTM D5185m	0	0	0
Molybdenum	ppm	ASTM D5185m	62	65	57
Manganese	ppm	ASTM D5185m	0	0	<1
Magnesium	ppm	ASTM D5185m	1042	979	956
Calcium	ppm	ASTM D5185m	1080	1076	1005
Phosphorus	ppm	ASTM D5185m	1005	1027	1008
Zinc	ppm	ASTM D5185m	1291	1269	1236
Sulfur	ppm	ASTM D5185m	3547	3254	3034

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	2	4	3
Sodium	ppm	ASTM D5185m	1	1	<1
Potassium	ppm	ASTM D5185m >20	0	2	<1



INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.2	0.1	0.1
Nitration	Abs/cm	*ASTM D7624 >20	9.6	7.5	6.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.6	19.5	18.6

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	20.0	16.7	14.9
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	11.10	10.89	10.90









OIL ANALYSIS REPORT

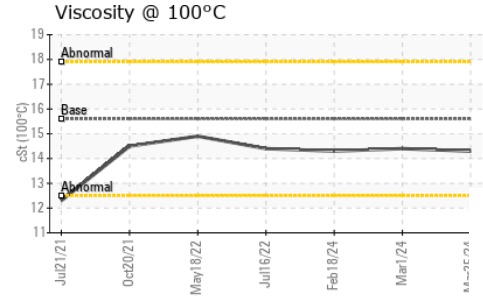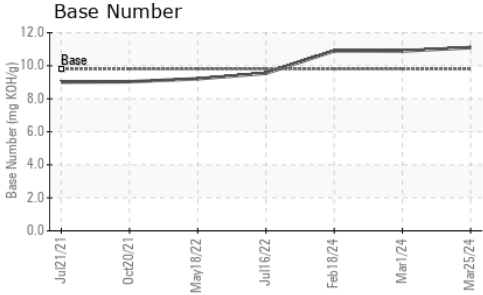

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.6	14.3	14.4	14.3

GRAPHS

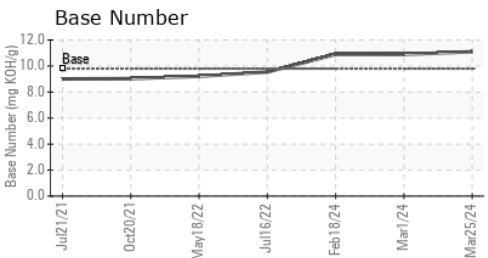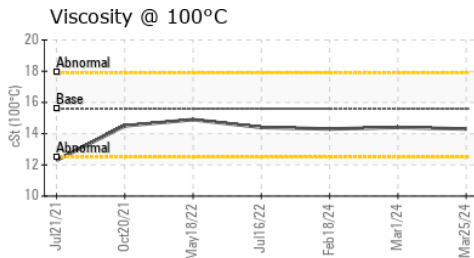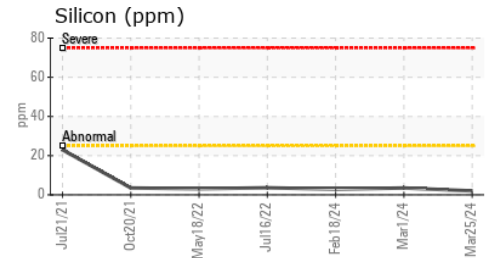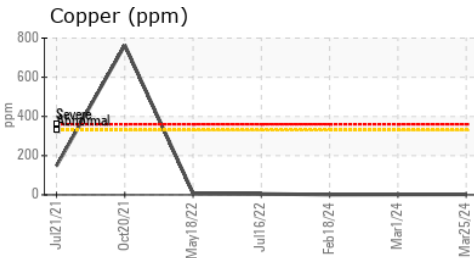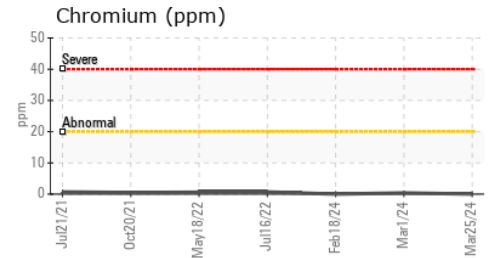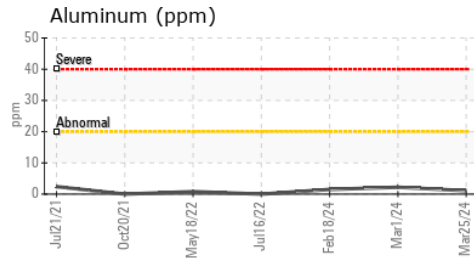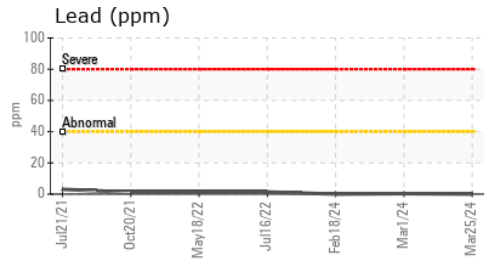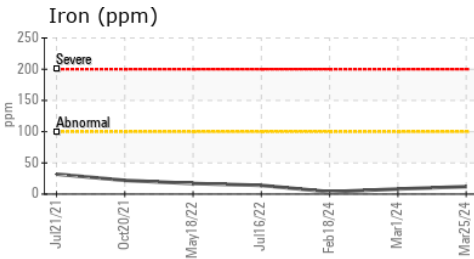

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0118453
Lab Number : 06132238
Unique Number : 10951703
Test Package : MOB 2

Received : 28 Mar 2024
Tested : 29 Mar 2024
Diagnosed : 29 Mar 2024 - Wes Davis

SCRAP METAL SERVICES (SMS Mill Services LLC)
 1500 COMMERCIAL AVE
 MINGO JUNCTION, OH
 US 43938
 Contact: FRANK NALLY
 fnally@scrapmetalservices.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: