


Area  
**MCGINN BUS COMPANY**  
 Machine Id  
**11416**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (36 QTS)**

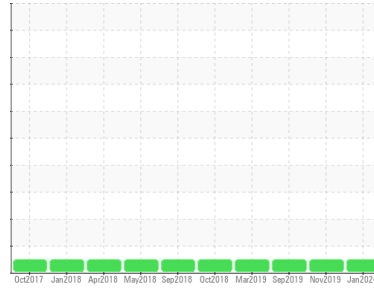

**DIAGNOSIS**

**Recommendation**

Resample at the next service interval to monitor.

**Wear**

All component wear rates are normal.

**Contamination**

There is no indication of any contamination in the oil.

**Fluid Condition**

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

**SAMPLE INFORMATION** method limit/base current history1 history2

Sample Number	Client Info	<b>PCA0090532</b>	PCA0009879	PCA0009869	
Sample Date	Client Info	<b>22 Jan 2024</b>	09 Nov 2019	24 Sep 2019	
Machine Age	mls	Client Info	<b>237353</b>	233936	229044
Oil Age	mls	Client Info	<b>12000</b>	4892	5559
Oil Changed	Client Info	<b>Changed</b>	Changed	Changed	
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL	

**CONTAMINATION** method limit/base current history1 history2

Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

**WEAR METALS** method limit/base current history1 history2

Iron	ppm	ASTM D5185m	>65	<b>40</b>	3	4
Chromium	ppm	ASTM D5185m	>5	<b>2</b>	<1	<1
Nickel	ppm	ASTM D5185m	>3	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	>5	<b>0</b>	<1	0
Silver	ppm	ASTM D5185m	>2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>35	<b>18</b>	2	1
Lead	ppm	ASTM D5185m	>10	<b>0</b>	0	0
Copper	ppm	ASTM D5185m	>180	<b>2</b>	<1	<1
Tin	ppm	ASTM D5185m	>8	<b>0</b>	0	0
Antimony	ppm	ASTM D5185m	>35	<b>---</b>	0	0
Vanadium	ppm	ASTM D5185m		<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

**ADDITIVES** method limit/base current history1 history2

Boron	ppm	ASTM D5185m	0	<b>12</b>	14	12
Barium	ppm	ASTM D5185m	0	<b>0</b>	<1	0
Molybdenum	ppm	ASTM D5185m	60	<b>53</b>	54	51
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>852</b>	888	791
Calcium	ppm	ASTM D5185m	1070	<b>1080</b>	1119	1002
Phosphorus	ppm	ASTM D5185m	1150	<b>885</b>	958	872
Zinc	ppm	ASTM D5185m	1270	<b>1108</b>	1087	1026
Sulfur	ppm	ASTM D5185m	2060	<b>3332</b>	2547	2506

**CONTAMINANTS** method limit/base current history1 history2

Silicon	ppm	ASTM D5185m	>15	<b>6</b>	4	4
Sodium	ppm	ASTM D5185m		<b>2</b>	1	2
Potassium	ppm	ASTM D5185m	>20	<b>0</b>	0	<1



**INFRA-RED** method limit/base current history1 history2

Soot %	%	*ASTM D7844	>3	<b>0.6</b>	0.3	0.5
Nitration	Abs/cm	*ASTM D7624	>20	<b>7.6</b>	5.2	6
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>17.6</b>	17.3	17.8

**FLUID DEGRADATION** method limit/base current history1 history2

Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>13.4</b>	12.2	12.6
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>10.18</b>	8.72	8.34









# OIL ANALYSIS REPORT

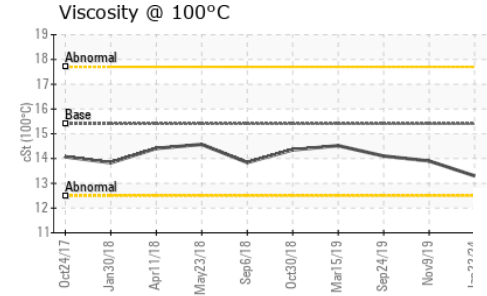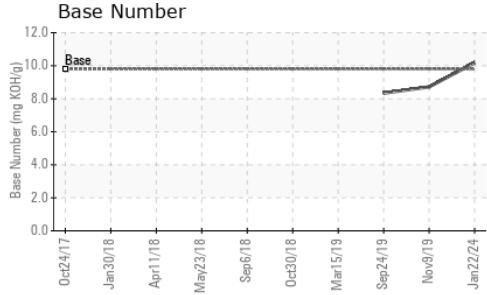

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.3</b>	13.9	14.1

## GRAPHS

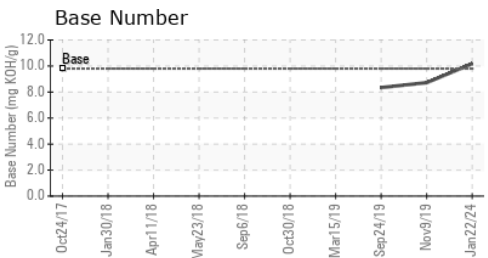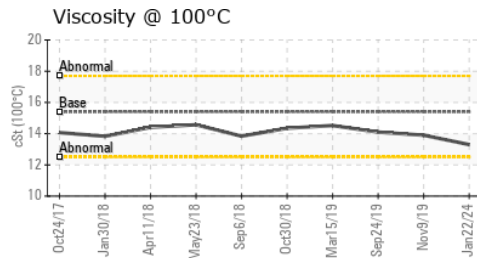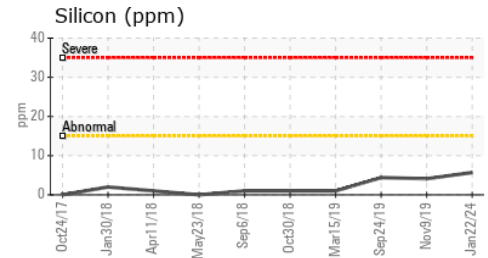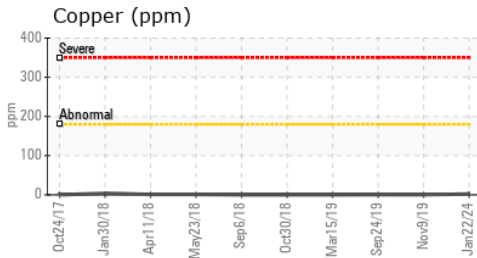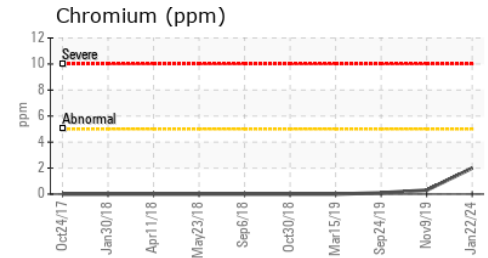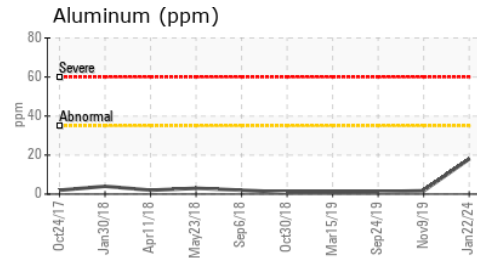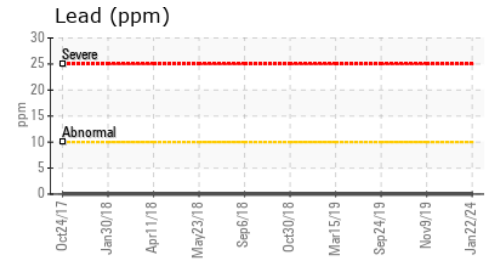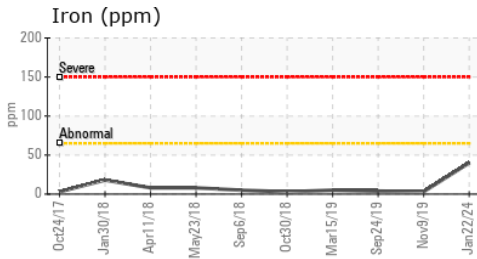

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0090532      **Received** : 28 Mar 2024  
**Lab Number** : **06132244**      **Tested** : 29 Mar 2024  
**Unique Number** : 10951709      **Diagnosed** : 29 Mar 2024 - Wes Davis  
**Test Package** : MOB 2

**MGINN BUS CO**  
 36 ALLEY ST  
 LYNN, MA  
 US 01902

Contact: TOM SCHULZ  
tommcginbus@aol.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: