




OIL ANALYSIS REPORT

Sample Rating Trend

DEGRADATION



Machine Id
426024-4677
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- LTR)

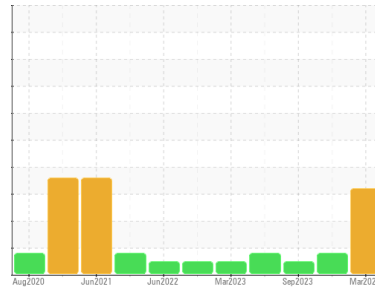

DIAGNOSIS

Recommendation

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value.

Wear

All component wear rates are normal.

Contamination

There is an abnormal amount of solids and carbon present in the oil. Light fuel dilution occurring.

Fluid Condition

Fuel is present in the oil and is lowering the viscosity. The BN level is low.

SAMPLE INFORMATION

method	limit/base	current	history1	history2	
Sample Number	Client Info	GFL0077792	GFL0077780	GFL0065069	
Sample Date	Client Info	19 Mar 2024	21 Nov 2023	19 Sep 2023	
Machine Age	mls	Client Info	738123	724317	717971
Oil Age	mls	Client Info	0	0	0
Oil Changed	Client Info	Changed	Changed	Not Changed	
Sample Status		ABNORMAL	ABNORMAL	NORMAL	

CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>120	25	28	11
Chromium	ppm	ASTM D5185m	>20	<1	1	0
Nickel	ppm	ASTM D5185m	>5	0	<1	0
Titanium	ppm	ASTM D5185m	>2	0	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>20	1	<1	<1
Lead	ppm	ASTM D5185m	>40	1	3	1
Copper	ppm	ASTM D5185m	>330	2	4	2
Tin	ppm	ASTM D5185m	>15	0	<1	0
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	<1	0

ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	12	3	3
Barium	ppm	ASTM D5185m	0	0	<1	0
Molybdenum	ppm	ASTM D5185m	60	53	56	58
Manganese	ppm	ASTM D5185m	0	<1	<1	0
Magnesium	ppm	ASTM D5185m	1010	903	895	986
Calcium	ppm	ASTM D5185m	1070	1053	1013	1114
Phosphorus	ppm	ASTM D5185m	1150	863	921	1063
Zinc	ppm	ASTM D5185m	1270	1121	1117	1308
Sulfur	ppm	ASTM D5185m	2060	3139	3017	3991

CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	2	4	2
Sodium	ppm	ASTM D5185m		<1	0	3
Potassium	ppm	ASTM D5185m	>20	0	2	2
Fuel	%	ASTM D3524	>3.0	▲ 3.4	<1.0	<1.0

INFRA-RED

method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>4	▲ 5.5	▲ 4.8	2.3
Nitration	Abs/cm	*ASTM D7624	>20	12.9	10.9	7.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	28.3	26.3	21.0


FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	17.8	15.4	13.0
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	▲ 0.0	5.1	8.4




OIL ANALYSIS REPORT


▲ Fuel Dilution

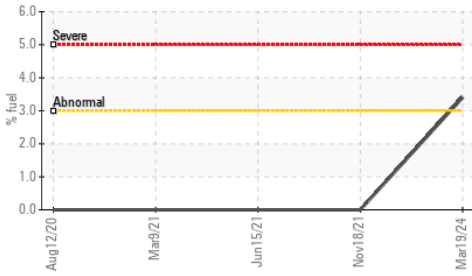


▲ Soot %

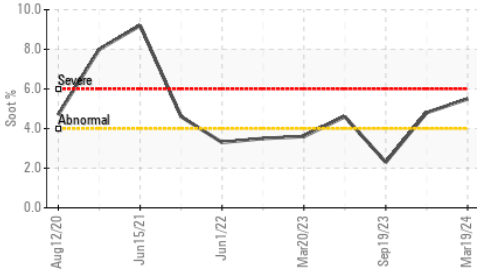

▲ Viscosity @ 100°C

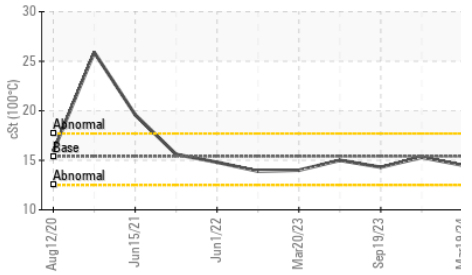

▲ Soot %

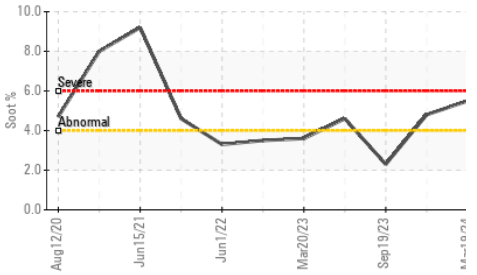

VISUAL


	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES


	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4 ▲ 14.5	15.3	14.3

GRAPHS


Ferrous Alloys

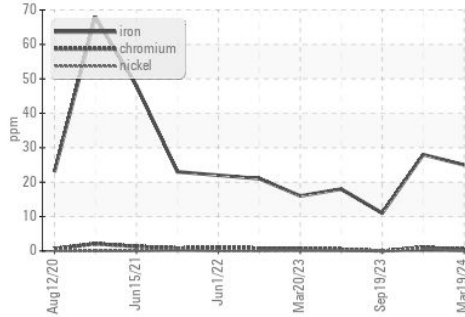


Non-ferrous Metals

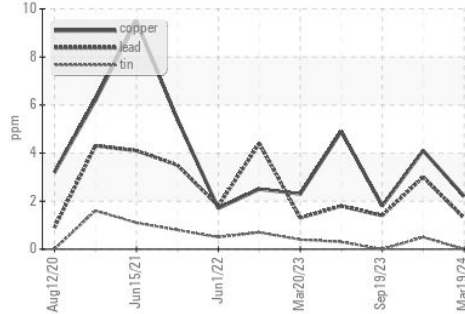

▲ Viscosity @ 100°C

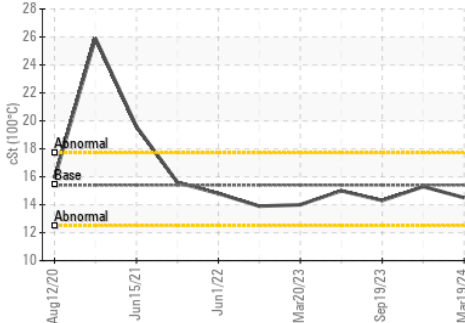

▲ Base Number

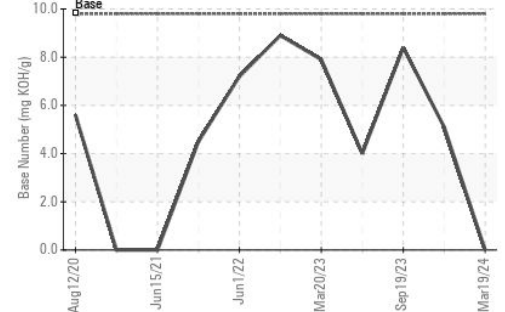

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0077792

Lab Number : 06132682

Unique Number : 10952147

Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

Received : 28 Mar 2024

Tested : 03 Apr 2024

Diagnosed : 03 Apr 2024 - Jonathan Hester

GFL Environmental - 650 - West Point Hauling

7825 Parham Landing Road

West Point, VA

US 23181

Contact: Jason Smith

jasonsmith@gflenv.com

T:

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)