




# OIL ANALYSIS REPORT

Sample Rating Trend

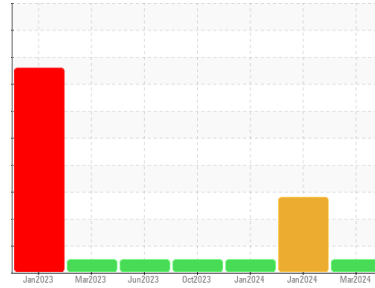

**NORMAL**



Machine Id  
**429102**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (11 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0072144</b>	GFL0072111	GFL0072106
Sample Date	Client Info	<b>28 Mar 2024</b>	11 Jan 2024	09 Jan 2024
Machine Age	hrs	<b>18377</b>	17883	17860
Oil Age	hrs	<b>600</b>	0	600
Oil Changed	Client Info	<b>Changed</b>	Not Changd	Changed
Sample Status		<b>NORMAL</b>	ATTENTION	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	▲ 1.4	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >90	<b>35</b>	10	29
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	<1	2
Nickel	ppm ASTM D5185m >2	<b>0</b>	0	0
Titanium	ppm ASTM D5185m >2	<b>0</b>	<1	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>&lt;1</b>	3	2
Lead	ppm ASTM D5185m >40	<b>3</b>	<1	4
Copper	ppm ASTM D5185m >330	<b>6</b>	<1	9
Tin	ppm ASTM D5185m >15	<b>0</b>	2	1
Vanadium	ppm ASTM D5185m	<b>0</b>	<1	0
Cadmium	ppm ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 0	<b>2</b>	● 57	3
Barium	ppm ASTM D5185m 0	<b>0</b>	<1	0
Molybdenum	ppm ASTM D5185m 60	<b>60</b>	43	58
Manganese	ppm ASTM D5185m 0	<b>&lt;1</b>	<1	<1
Magnesium	ppm ASTM D5185m 1010	<b>1010</b>	● 518	895
Calcium	ppm ASTM D5185m 1070	<b>1125</b>	● 1493	1013
Phosphorus	ppm ASTM D5185m 1150	<b>1061</b>	● 717	1019
Zinc	ppm ASTM D5185m 1270	<b>1289</b>	● 887	1171
Sulfur	ppm ASTM D5185m 2060	<b>3456</b>	2467	3052

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>3</b>	12	4
Sodium	ppm ASTM D5185m	<b>3</b>	20	2
Potassium	ppm ASTM D5185m >20	<b>0</b>	<1	3

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >6	<b>0.7</b>	0.1	0.9
Nitration	Abs/cm *ASTM D7624 >20	<b>9.4</b>	4.9	9.5
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>20.8</b>	21.1	21.5

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>17.7</b>	18.3	17.7
Base Number (BN)	mg KOH/g ASTM D2896 9.8	<b>7.4</b>	10.7	7.5








# OIL ANALYSIS REPORT

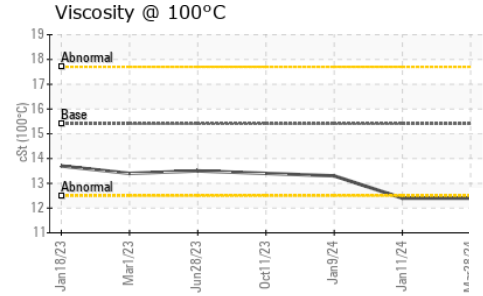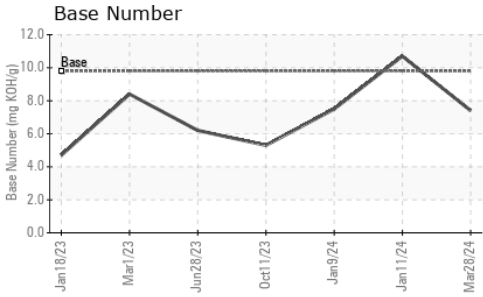

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>12.4</b>	12.4	13.3

## GRAPHS

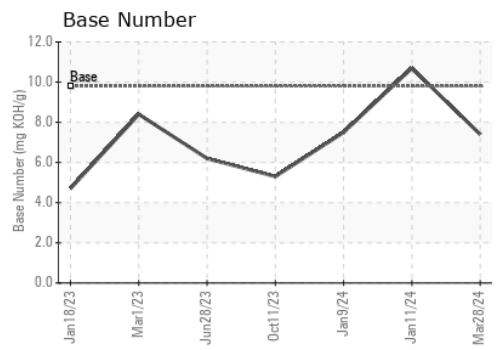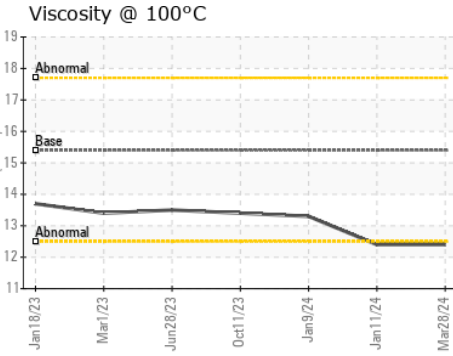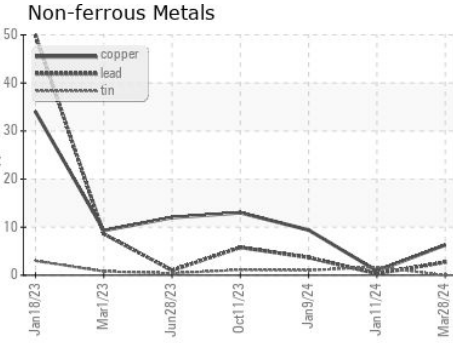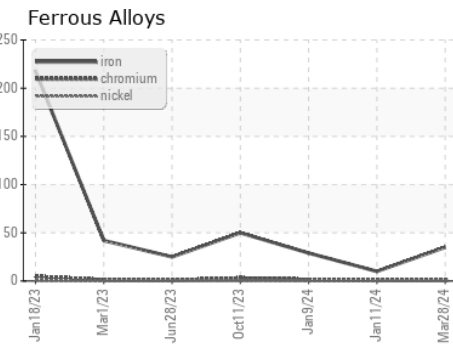

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0072144 **Received** : 29 Mar 2024  
**Lab Number** : **06132933** **Tested** : 31 Mar 2024  
**Unique Number** : 10952398 **Diagnosed** : 31 Mar 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 094 - Cedartown**  
 2097 Buchanan Highway  
 Cedartown, GA  
 US 30125  
 Contact: WILLIAM FOSTER  
 william.foster@gflenv.com  
 T: (800)207-6618  
 F:

Certificate L2367  
 To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)