




OIL ANALYSIS REPORT

Sample Rating Trend

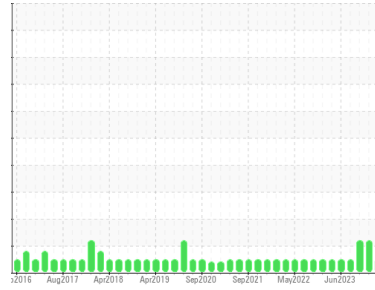

NORMAL



Area
(DQR690)

Machine Id
3702

Component
Diesel Engine

Fluid
CHEVRON DELO 400 SDE SAE 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0072072	GFL0072105	GFL0072029
Sample Date	Client Info		05 Mar 2024	05 Jan 2024	28 Dec 2023
Machine Age	hrs	Client Info	22667	22086	22018
Oil Age	hrs	Client Info	600	600	600
Oil Changed	Client Info		Changed	Changed	Not Changed
Sample Status			NORMAL	ABNORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>75	15	22	17
Chromium	ppm	ASTM D5185m	>5	<1	1	<1
Nickel	ppm	ASTM D5185m	>4	0	<1	0
Titanium	ppm	ASTM D5185m	>2	0	<1	0
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>15	2	3	3
Lead	ppm	ASTM D5185m	>25	0	0	<1
Copper	ppm	ASTM D5185m	>100	4	18	16
Tin	ppm	ASTM D5185m	>4	0	<1	<1
Vanadium	ppm	ASTM D5185m		0	0	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m		2	3	3
Barium	ppm	ASTM D5185m		0	0	0
Molybdenum	ppm	ASTM D5185m		62	62	66
Manganese	ppm	ASTM D5185m		0	<1	<1
Magnesium	ppm	ASTM D5185m		1039	893	1040
Calcium	ppm	ASTM D5185m		1150	992	1146
Phosphorus	ppm	ASTM D5185m	760	1092	981	1066
Zinc	ppm	ASTM D5185m	800	1324	1152	1336
Sulfur	ppm	ASTM D5185m	3000	3638	2778	3017

CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	5	9	8
Sodium	ppm	ASTM D5185m		15	▲ 140	▲ 135
Potassium	ppm	ASTM D5185m	>20	0	2	<1

INFRA-RED



	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844	>6	0.5	0.8	0.7
Nitration	Abs/cm	*ASTM D7624	>20	7.8	9.3	8.6
Sulfation	Abs/.1mm	*ASTM D7415	>30	19.8	21.2	20.9

FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs/.1mm	*ASTM D7414	>25	15.6	16.6	16.1
Base Number (BN)	mg KOH/g	ASTM D2896	10	8.0	7.4	7.5







OIL ANALYSIS REPORT

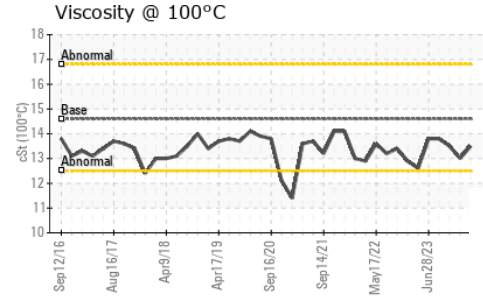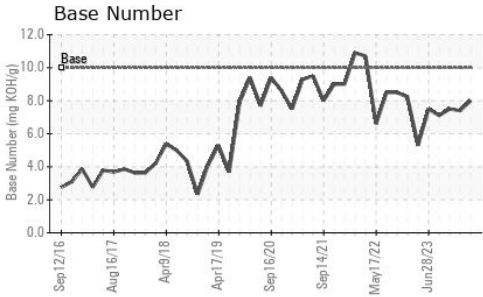

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.6	13.5	13.0	13.5

GRAPHS

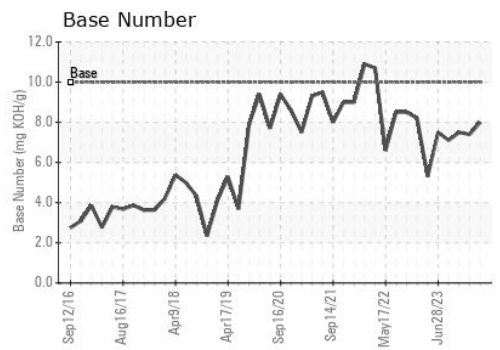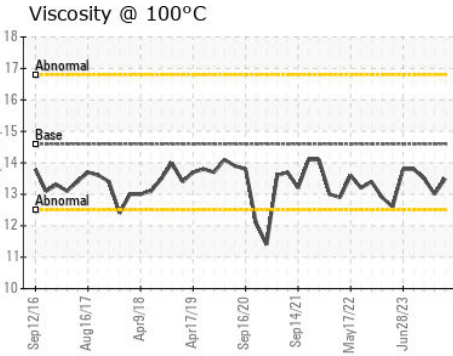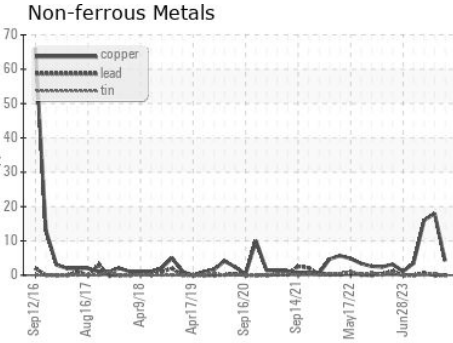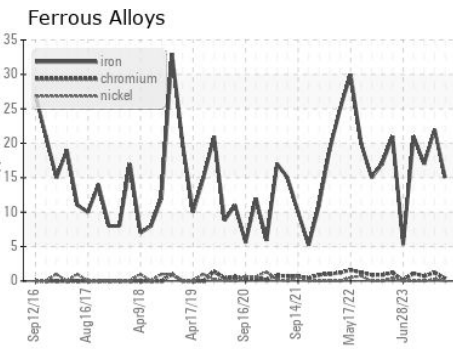

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0072072 **Received** : 29 Mar 2024
Lab Number : **06132934** **Tested** : 31 Mar 2024
Unique Number : 10952399 **Diagnosed** : 02 Apr 2024 - Don Baldrige
Test Package : FLEET

GFL Environmental - 094 - Cedartown
 2097 Buchanan Highway
 Cedartown, GA
 US 30125
 Contact: WILLIAM FOSTER
 william.foster@gflenv.com
 T: (800)207-6618
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.
 * - Denotes test methods that are outside of the ISO 17025 scope of accreditation.
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)