




# OIL ANALYSIS REPORT

Sample Rating Trend

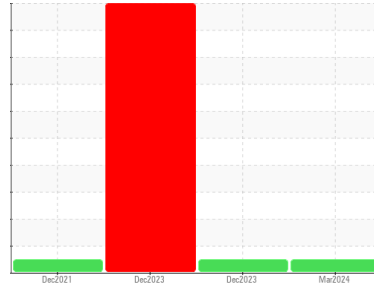

**NORMAL**



Machine Id  
**810M**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0117715</b>	GFL0105809	GFL0105803
Sample Date	Client Info		<b>27 Mar 2024</b>	26 Dec 2023	22 Dec 2023
Machine Age	hrs	Client Info	<b>10279</b>	10276	10279
Oil Age	hrs	Client Info	<b>10279</b>	9533	9533
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	SEVERE

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	▲ 0.10

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>&lt;1</b>	5	44
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	3
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >30	<b>2</b>	6	4
Lead	ppm	ASTM D5185m >30	<b>0</b>	0	1
Copper	ppm	ASTM D5185m >150	<b>0</b>	<1	2
Tin	ppm	ASTM D5185m >5	<b>0</b>	<1	0
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>5</b>	<1	17
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>54</b>	59	104
Manganese	ppm	ASTM D5185m 0	<b>0</b>	0	0
Magnesium	ppm	ASTM D5185m 1010	<b>910</b>	973	805
Calcium	ppm	ASTM D5185m 1070	<b>1024</b>	1095	967
Phosphorus	ppm	ASTM D5185m 1150	<b>1014</b>	1045	803
Zinc	ppm	ASTM D5185m 1270	<b>1212</b>	1212	1059
Sulfur	ppm	ASTM D5185m 2060	<b>3512</b>	3118	2961

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>3</b>	3	▲ 25
Sodium	ppm	ASTM D5185m	<b>6</b>	<1	▲ 1433
Potassium	ppm	ASTM D5185m >20	<b>4</b>	0	▲ 14

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	0.2	2.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>4.4</b>	5.1	15.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.2</b>	18.1	25.0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.1</b>	13.9	22.1
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>9.4</b>	8.5	12.4







# OIL ANALYSIS REPORT

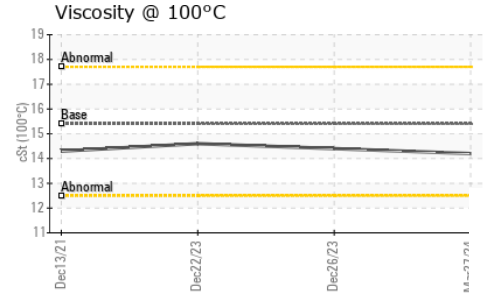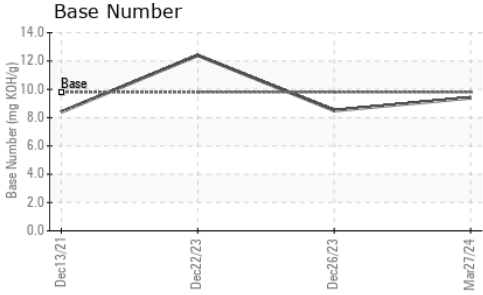

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.2</b>	14.4	14.6

## GRAPHS

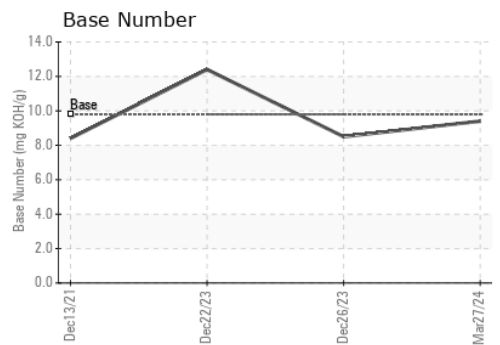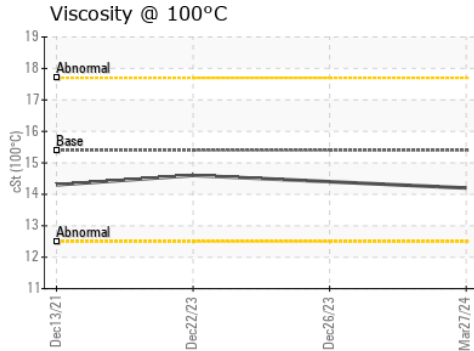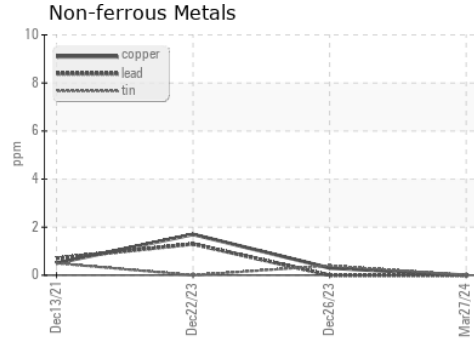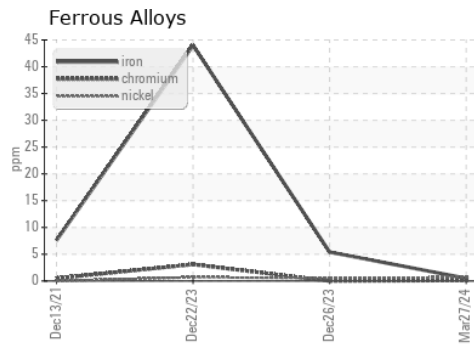

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0117715      **Received** : 29 Mar 2024  
**Lab Number** : **06133001**      **Tested** : 31 Mar 2024  
**Unique Number** : 10952466      **Diagnosed** : 31 Mar 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 415 - Michigan East**  
 6200 Elmridge  
 Sterling Heights, MI  
 US 48313  
 Contact: Frank Wolak  
 fwolak@gflenv.com  
 T: (586)825-9514  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)