


OIL ANALYSIS REPORT



Area
G.LOPES CONSTRUCTION INC./Off-Road
 Machine Id
E346
 Component
Right Final Drive
 Fluid
MOBIL MOBILTRANS HD 50 (--- GAL)

Sample Rating Trend

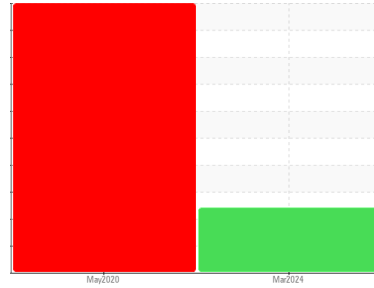

WEAR



DIAGNOSIS

▲ Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

▲ Wear

The iron level has decreased, but is still abnormal. Gear wear is indicated.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The AN level is acceptable for this fluid. The condition of the oil is acceptable for the time in service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0109947	PCA0013496	---
Sample Date	Client Info		26 Mar 2024	07 May 2020	---
Machine Age	hrs	Client Info	8296	5565	---
Oil Age	hrs	Client Info	2731	0	---
Oil Changed	Client Info		N/A	Changed	---
Sample Status			ABNORMAL	SEVERE	---

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	---

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >800	▲ 1283	▲ 3585	---
Chromium	ppm	ASTM D5185m >10	▲ 13	▲ 40	---
Nickel	ppm	ASTM D5185m >5	▲ 7	17	---
Titanium	ppm	ASTM D5185m >15	5	15	---
Silver	ppm	ASTM D5185m >2	0	0	---
Aluminum	ppm	ASTM D5185m >75	53	● 199	---
Lead	ppm	ASTM D5185m >10	0	1	---
Copper	ppm	ASTM D5185m >75	4	12	---
Tin	ppm	ASTM D5185m >8	0	0	---
Antimony	ppm	ASTM D5185m >50	---	2	---
Vanadium	ppm	ASTM D5185m	0	0	---
Cadmium	ppm	ASTM D5185m	0	<1	---

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	8	40	---
Barium	ppm	ASTM D5185m	0	5	---
Molybdenum	ppm	ASTM D5185m	2	0	---
Manganese	ppm	ASTM D5185m	9	30	---
Magnesium	ppm	ASTM D5185m	16	43	---
Calcium	ppm	ASTM D5185m	2735	1908	---
Phosphorus	ppm	ASTM D5185m	975	793	---
Zinc	ppm	ASTM D5185m	1170	865	---
Sulfur	ppm	ASTM D5185m	8125	14735	---

CONTAMINANTS


	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >400	376	▲ 1264	---
Sodium	ppm	ASTM D5185m	12	51	---
Potassium	ppm	ASTM D5185m >20	16	71	---

FLUID DEGRADATION


	method	limit/base	current	history1	history2
Acid Number (AN)	mg KOH/g	ASTM D8045	1.58	2.467	---

OIL ANALYSIS REPORT


▲ Ferrous Alloys

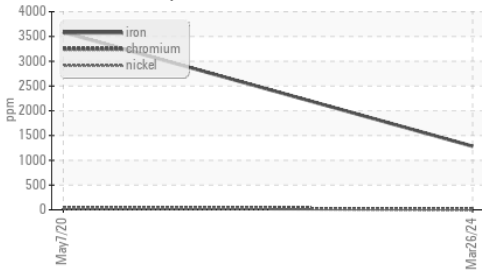

Acid Number

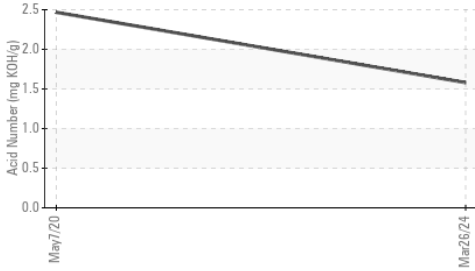

Viscosity @ 40°C

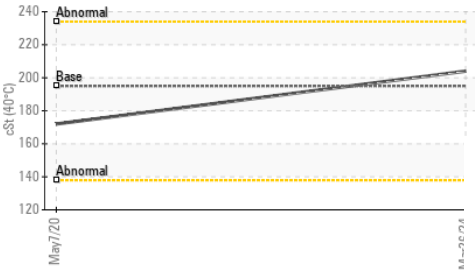








VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	▲ 2.6%
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 40°C	cSt	ASTM D445	195	204	172

SAMPLE IMAGES	method	limit/base	current	history1	history2
---------------	--------	------------	---------	----------	----------

Color	no image		no image
Bottom	no image		no image

GRAPHS

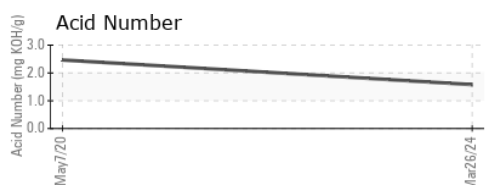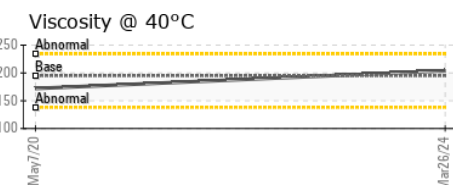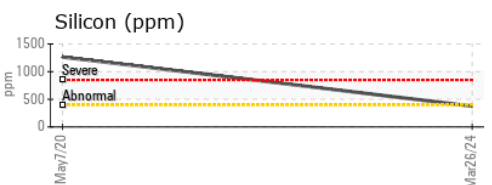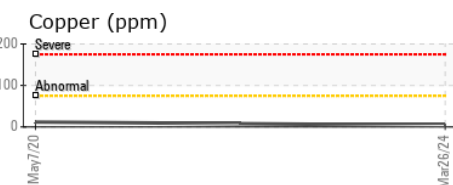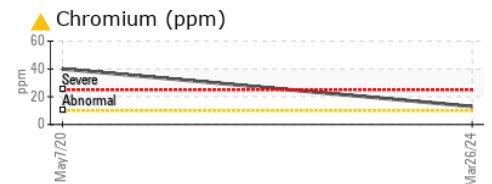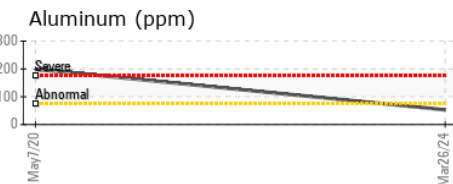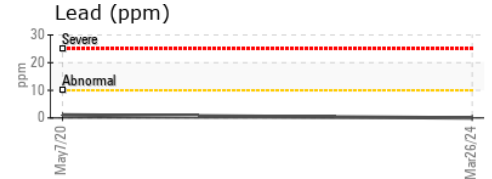

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0109947
Lab Number : **06133545**
Unique Number : 10953010
Test Package : MOB 2

Received : 29 Mar 2024
Tested : 01 Apr 2024
Diagnosed : 03 Apr 2024 - Don Baldrige

G LOPES CONSTRUCTION
 565 WINTHROP ST
 TAUNTON, MA
 US 02780
 Contact: BUTCH MCGRATH
 bmcgrath@glopes.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: