




# OIL ANALYSIS REPORT

Sample Rating Trend

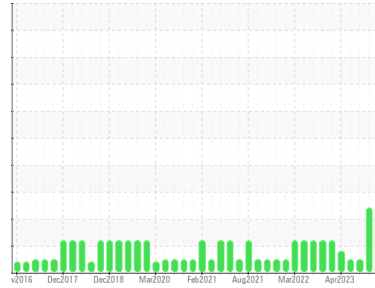

GLYCOL



Machine Id  
**2411**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (38 QTS)**

## DIAGNOSIS

### Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

Sodium and/or potassium levels are high.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0113919</b>	GFL0093741	GFL0093732
Sample Date	Client Info		<b>26 Mar 2024</b>	28 Feb 2024	25 Sep 2023
Machine Age	hrs	Client Info	<b>24822</b>	24656	24062
Oil Age	hrs	Client Info	<b>24822</b>	0	0
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>ABNORMAL</b>	ABNORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >120	<b>4</b>	7	46
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	2
Nickel	ppm	ASTM D5185m >5	<b>&lt;1</b>	0	<1
Titanium	ppm	ASTM D5185m >2	<b>&lt;1</b>	<1	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>3</b>	2	8
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	0	<1
Copper	ppm	ASTM D5185m >330	<b>2</b>	5	5
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>6</b>	10	2
Barium	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>65</b>	65	68
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	2
Magnesium	ppm	ASTM D5185m 1010	<b>900</b>	867	1079
Calcium	ppm	ASTM D5185m 1070	<b>1038</b>	1028	1170
Phosphorus	ppm	ASTM D5185m 1150	<b>1036</b>	928	1070
Zinc	ppm	ASTM D5185m 1270	<b>1195</b>	1152	1369
Sulfur	ppm	ASTM D5185m 2060	<b>3133</b>	2925	3297

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>7</b>	7	13
Sodium	ppm	ASTM D5185m	<b>▲ 227</b>	▲ 204	16
Potassium	ppm	ASTM D5185m >20	<b>▲ 34</b>	▲ 28	12
Glycol	%	*ASTM D2982	<b>NEG</b>	NEG	NEG

## INFRA-RED




	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >4	<b>0.1</b>	0.2	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>7.0</b>	7.2	9.1
Sulfation	Abs./1mm	*ASTM D7415 >30	<b>17.8</b>	17.9	18.7

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs./1mm	*ASTM D7414 >25	<b>14.3</b>	13.7	15.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>9.1</b>	8.5	6.4







# OIL ANALYSIS REPORT

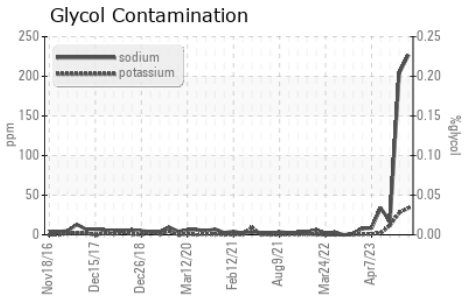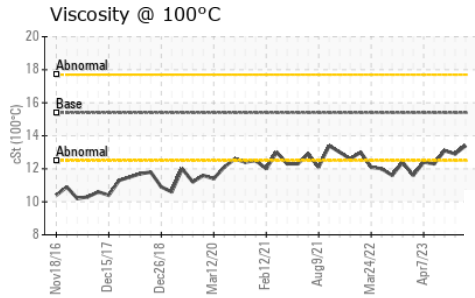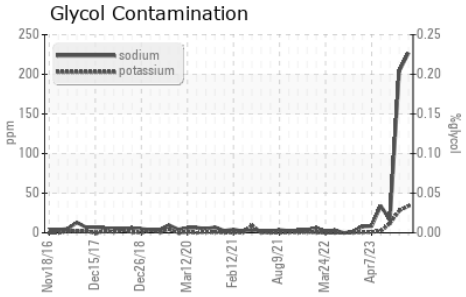

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.4</b>	12.9	13.1

## GRAPHS

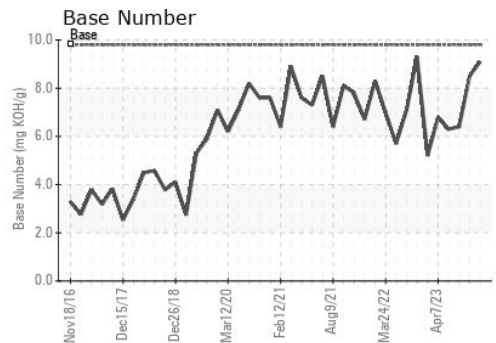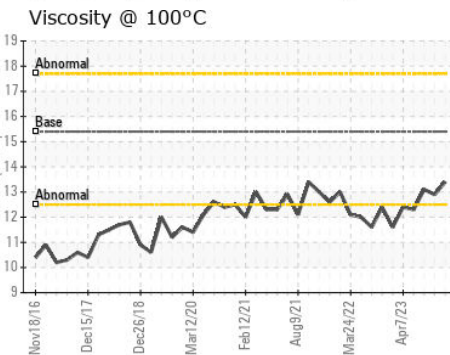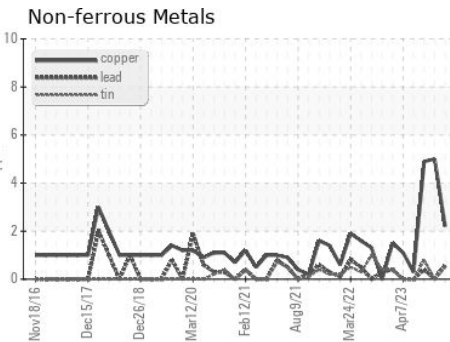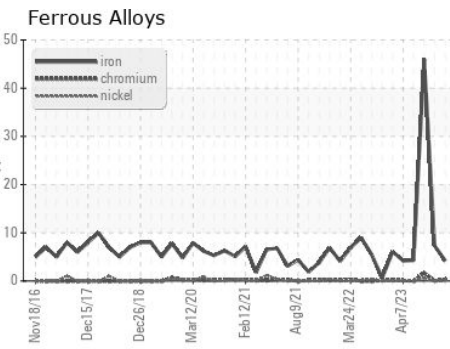

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0113919 **Received** : 29 Mar 2024  
**Lab Number** : **06133885** **Tested** : 03 Apr 2024  
**Unique Number** : 10953350 **Diagnosed** : 03 Apr 2024 - Jonathan Hester  
**Test Package** : FLEET ( Additional Tests: Glycol )

**GFL Environmental - 029 - Wytheville**  
 2390 North 4th Street  
 Wytheville, VA  
 US 24382  
 Contact: CHARLES CORVIN  
 charles.corvin@gflenv.com; canastasio@wearcheckusa.com  
 T: (276)223-4476  
 F: (276)223-1283

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)