




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Machine Id  
**721022-361655**  
 Component  
**Transmission**  
 Fluid  
**PETRO CANADA DuraDrive HD Synthetic 668 (--- GAL)**

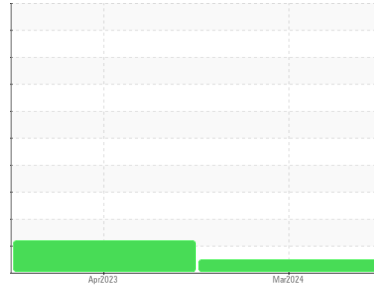

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the fluid.

### Fluid Condition

The condition of the fluid is acceptable for the time in service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0114145</b>	GFL0070336	---
Sample Date	Client Info		<b>12 Mar 2024</b>	26 Apr 2023	---
Machine Age	hrs	Client Info	<b>27060</b>	26119	---
Oil Age	hrs	Client Info	<b>815</b>	1200	---
Oil Changed	Client Info		<b>Not Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	ABNORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >200	<b>30</b>	10	---
Chromium	ppm	ASTM D5185m >10	<b>&lt;1</b>	0	---
Nickel	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Silver	ppm	ASTM D5185m	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >50	<b>21</b>	4	---
Lead	ppm	ASTM D5185m >50	<b>1</b>	0	---
Copper	ppm	ASTM D5185m >200	<b>10</b>	2	---
Tin	ppm	ASTM D5185m >10	<b>3</b>	0	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>58</b>	73	---
Barium	ppm	ASTM D5185m	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Magnesium	ppm	ASTM D5185m	<b>1</b>	<1	---
Calcium	ppm	ASTM D5185m	<b>64</b>	55	---
Phosphorus	ppm	ASTM D5185m	<b>241</b>	227	---
Zinc	ppm	ASTM D5185m	<b>6</b>	3	---
Sulfur	ppm	ASTM D5185m	<b>1325</b>	1413	---

## CONTAMINANTS



	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >50	<b>7</b>	3	---
Sodium	ppm	ASTM D5185m	<b>38</b>	26	---
Potassium	ppm	ASTM D5185m >20	<b>29</b>	20	---
Glycol	%	*ASTM D2982	<b>---</b>	0.0	---

## VISUAL

	method	limit/base	current	history1	history2
White Metal	scalar	*Visual NONE	<b>NONE</b>	▲ MODER	---
Yellow Metal	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Precipitate	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Silt	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Debris	scalar	*Visual NONE	<b>LIGHT</b>	NONE	---
Sand/Dirt	scalar	*Visual NONE	<b>NONE</b>	NONE	---
Appearance	scalar	*Visual NORML	<b>NORML</b>	NORML	---
Odor	scalar	*Visual NORML	<b>NORML</b>	NORML	---
Emulsified Water	scalar	*Visual >0.1	<b>NEG</b>	NEG	---
Free Water	scalar	*Visual	<b>NEG</b>	NEG	---



# OIL ANALYSIS REPORT

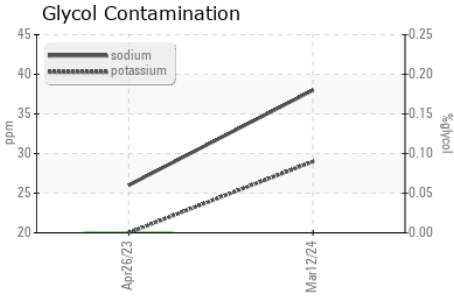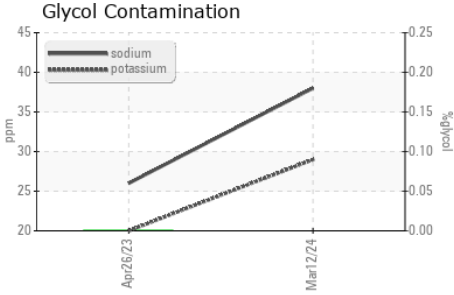




## FLUID PROPERTIES

method	limit/base	current	history1	history2
Visc @ 40°C	cSt ASTM D445 34	<b>33.1</b>	32.9	---

## SAMPLE IMAGES

method	limit/base	current	history1	history2
Color		no image	no image	no image
Bottom		no image	no image	no image

## GRAPHS

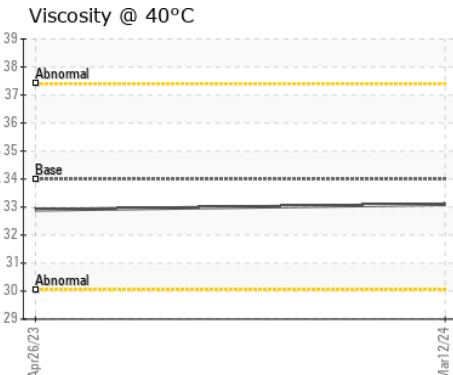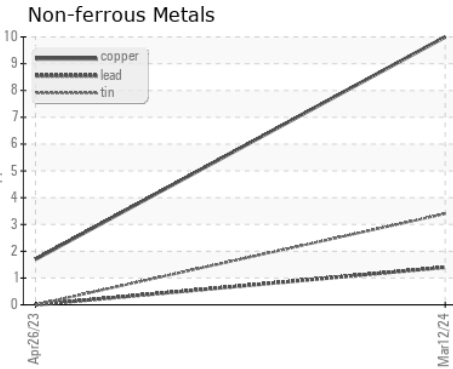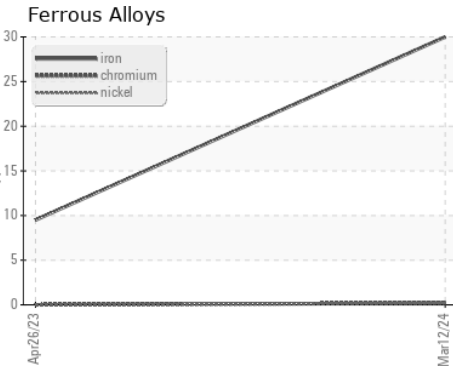

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0114145      **Received** : 29 Mar 2024  
**Lab Number** : 06134310      **Tested** : 03 Apr 2024  
**Unique Number** : 10953775      **Diagnosed** : 03 Apr 2024 - Sean Felton  
**Test Package** : FLEET ( Additional Tests: Glycol )

**GFL Environmental - 837 - Harrison TS**  
 22820 S State Route 291  
 Harrisonville, MO  
 US 64701  
 Contact: Robert Hart

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T: (580)461-1509

F: