




# OIL ANALYSIS REPORT

Sample Rating Trend

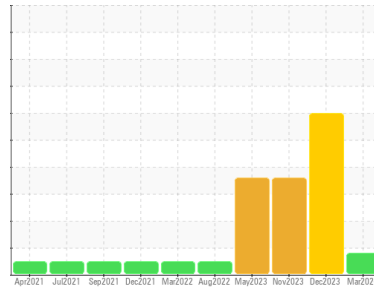

FUEL



Machine Id  
**367M**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

We recommend that you drain the oil from the component if this has not already been done. We recommend an early resample to monitor this condition.

### Wear

All component wear rates are normal.

### Contamination

There is a moderate amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The oil is no longer serviceable due to the presence of contaminants.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0117709</b>	GFL0105831	GFL0101430
Sample Date	Client Info	<b>28 Mar 2024</b>	24 Dec 2023	30 Nov 2023
Machine Age	hrs	<b>18073</b>	17623	17550
Oil Age	hrs	<b>17623</b>	17550	16581
Oil Changed	Client Info	<b>Not Chngd</b>	Changed	Not Chngd
Sample Status		<b>ABNORMAL</b>	SEVERE	SEVERE

## CONTAMINATION

method	limit/base	current	history1	history2	
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2		
Iron	ppm	ASTM D5185m	>100	<b>27</b>	90	78
Chromium	ppm	ASTM D5185m	>20	<b>&lt;1</b>	4	3
Nickel	ppm	ASTM D5185m	>4	<b>0</b>	1	<1
Titanium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>20	<b>2</b>	6	4
Lead	ppm	ASTM D5185m	>40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m	>330	<b>&lt;1</b>	7	7
Tin	ppm	ASTM D5185m	>15	<b>&lt;1</b>	1	<1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	0
Cadmium	ppm	ASTM D5185m		<b>0</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2		
Boron	ppm	ASTM D5185m	0	<b>4</b>	11	10
Barium	ppm	ASTM D5185m	0	<b>0</b>	<1	2
Molybdenum	ppm	ASTM D5185m	60	<b>54</b>	67	64
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	1	<1
Magnesium	ppm	ASTM D5185m	1010	<b>855</b>	754	681
Calcium	ppm	ASTM D5185m	1070	<b>909</b>	857	816
Phosphorus	ppm	ASTM D5185m	1150	<b>885</b>	832	723
Zinc	ppm	ASTM D5185m	1270	<b>1103</b>	1006	966
Sulfur	ppm	ASTM D5185m	2060	<b>2931</b>	2125	3099

## CONTAMINANTS

method	limit/base	current	history1	history2		
Silicon	ppm	ASTM D5185m	>25	<b>7</b>	▲ 28	25
Sodium	ppm	ASTM D5185m		<b>70</b>	▲ 611	▲ 638
Potassium	ppm	ASTM D5185m	>20	<b>1</b>	4	5
Fuel	%	ASTM D3524	>5	▲ <b>7.0</b>	▲ 12.1	▲ 14.4

## INFRA-RED




method	limit/base	current	history1	history2		
Soot %	%	*ASTM D7844	>3	<b>0.4</b>	1.1	0.9
Nitration	Abs/cm	*ASTM D7624	>20	<b>10.8</b>	17.5	16.4
Sulfation	Abs/.1mm	*ASTM D7415	>30	<b>20.9</b>	27.7	26.9

## FLUID DEGRADATION

method	limit/base	current	history1	history2		
Oxidation	Abs/.1mm	*ASTM D7414	>25	<b>19.0</b>	31.7	30.3
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	<b>7.3</b>	4.9	4.7







# OIL ANALYSIS REPORT

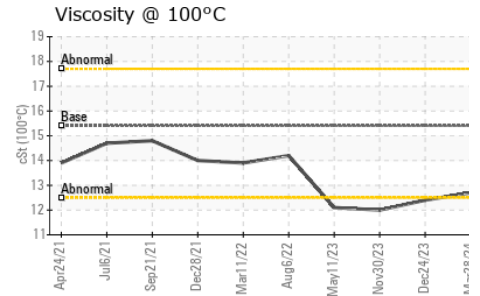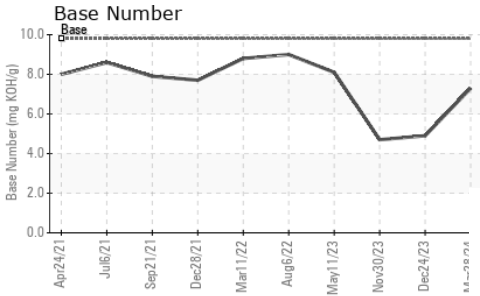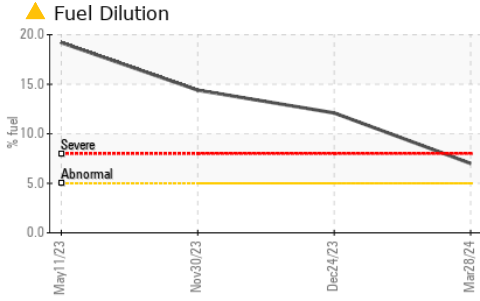

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	12.7	▲ 12.4 ▲ 12.0

## GRAPHS

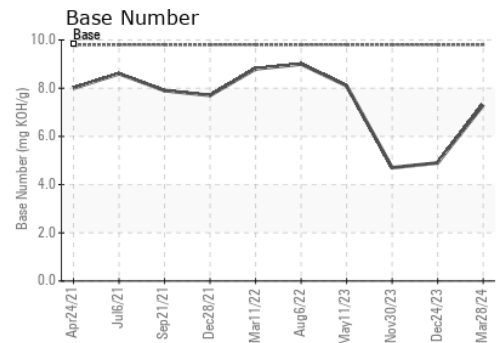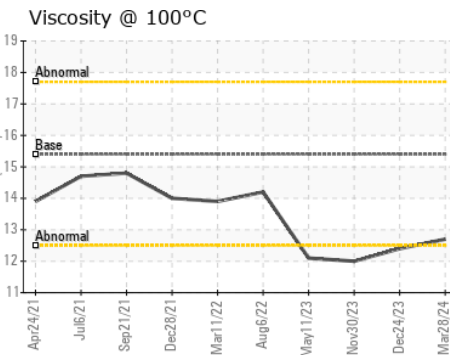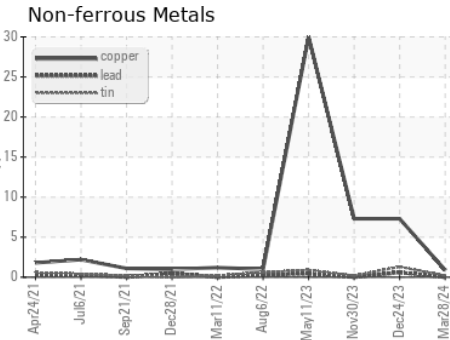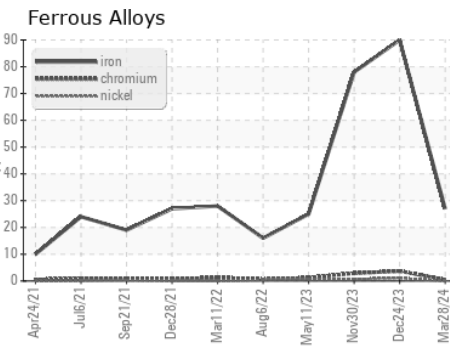

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0117709 Received : 01 Apr 2024  
 Lab Number : 06134440 Tested : 03 Apr 2024  
 Unique Number : 10953905 Diagnosed : 03 Apr 2024 - Wes Davis  
 Test Package : FLEET ( Additional Tests: PercentFuel )

GFL Environmental - 415 - Michigan East  
 6200 Elmridge  
 Sterling Heights, MI  
 US 48313  
 Contact: Frank Wolak  
 fwolak@gflenv.com  
 T: (586)825-9514  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)