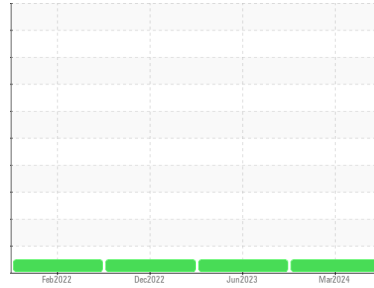


OIL ANALYSIS REPORT

Sample Rating Trend

NORMAL


Area
KEMP QUARRIES / BCS - STILLWELL [66212]
 Machine Id
WL090
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor. (Customer Sample Comment: PM-3 changed filters and fluid)

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		PCA0109327	PCA0086431	PCA0061844
Sample Date	Client Info		26 Mar 2024	30 Jun 2023	02 Dec 2022
Machine Age	hrs	Client Info	23090	22640	22251
Oil Age	hrs	Client Info	23090	22640	0
Oil Changed		Client Info	Changed	Changed	Changed
Sample Status			NORMAL	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	13	21	41
Chromium	ppm	ASTM D5185m >20	<1	1	1
Nickel	ppm	ASTM D5185m >4	0	0	0
Titanium	ppm	ASTM D5185m	0	0	0
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >20	1	2	2
Lead	ppm	ASTM D5185m >40	6	16	38
Copper	ppm	ASTM D5185m >330	1	3	8
Tin	ppm	ASTM D5185m >15	<1	<1	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	12	2	5
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	63	67	63
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 1010	985	1094	1002
Calcium	ppm	ASTM D5185m 1070	1091	1188	1215
Phosphorus	ppm	ASTM D5185m 1150	1043	1153	1017
Zinc	ppm	ASTM D5185m 1270	1280	1448	1358
Sulfur	ppm	ASTM D5185m 2060	3430	3934	3366

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	3	4	9
Sodium	ppm	ASTM D5185m	7	3	9
Potassium	ppm	ASTM D5185m >20	2	1	1



INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.7	1	1.6
Nitration	Abs/cm	*ASTM D7624 >20	9.3	10.4	12.4
Sulfation	Abs/.1mm	*ASTM D7415 >30	21.3	23.3	26.1

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	18.2	20.9	21.6
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	8.3	8.2	9.0









OIL ANALYSIS REPORT

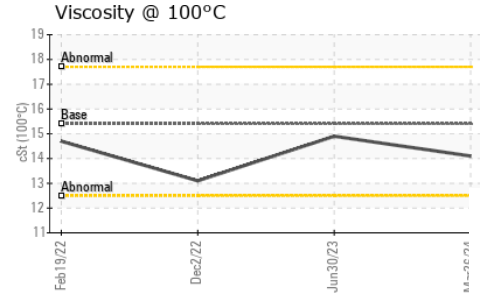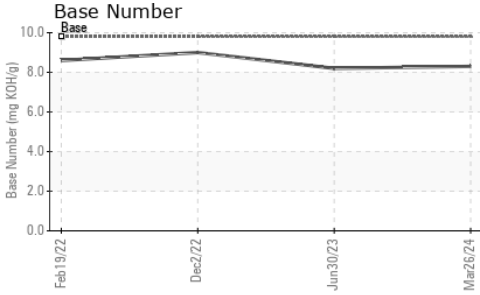

PARAMETER	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	14.1	14.9	13.1

GRAPHS

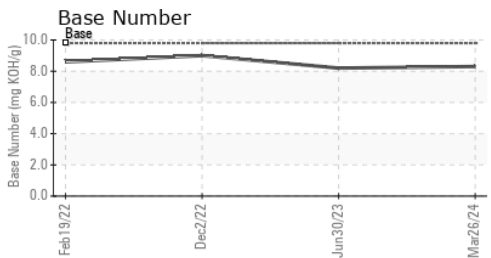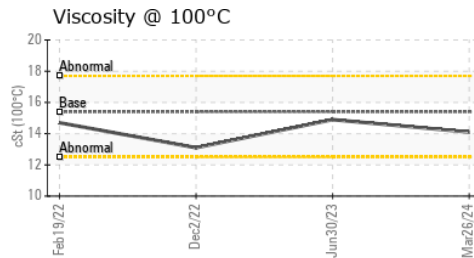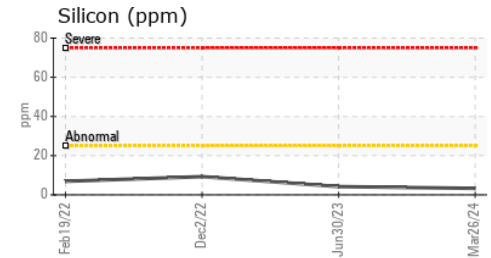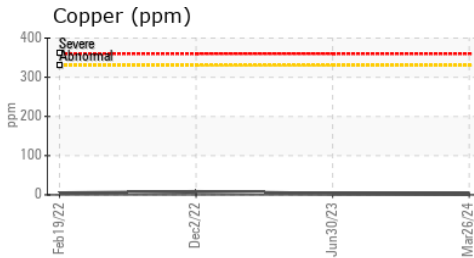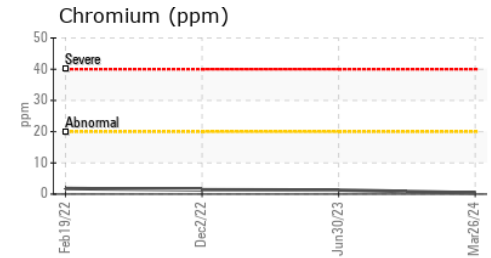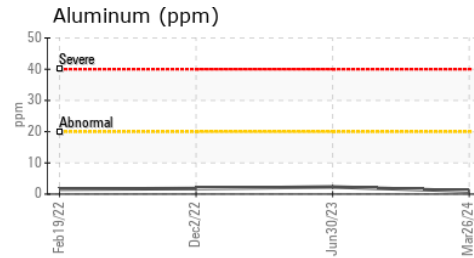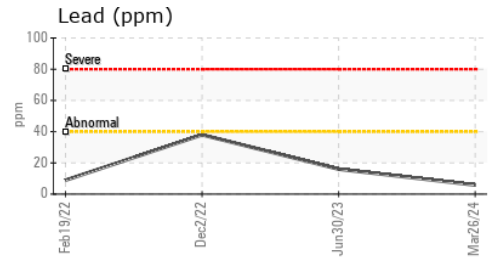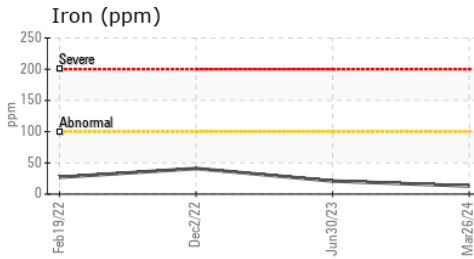

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : PCA0109327 **Received** : 01 Apr 2024
Lab Number : **06134452** **Tested** : 02 Apr 2024
Unique Number : 10953917 **Diagnosed** : 03 Apr 2024 - Jonathan Hester

Kemp Quarries - Benton County Stone - Stillwell
 463917 Highway 100
 Bunch, OK
 US 74931

Test Package : MOB 1 (Additional Tests: TBN)

Contact: stilwell@bentoncountystone.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: