




OIL ANALYSIS REPORT

Sample Rating Trend

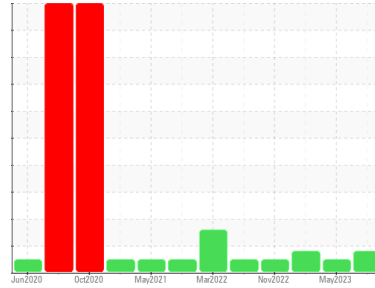

WEAR



Machine Id

12057

Component

Diesel Engine

Fluid

PETRO CANADA DURON SHP 15W40 (11 GAL)

DIAGNOSIS

Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

Cylinder, crank, or cam shaft wear is indicated.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0096933	GFL0071537	GFL0053155
Sample Date	Client Info		22 Mar 2024	09 May 2023	17 Mar 2023
Machine Age	hrs	Client Info	2230	5330	5330
Oil Age	hrs	Client Info	5330	600	600
Oil Changed	Client Info		Not Changed	Changed	Changed
Sample Status			ABNORMAL	NORMAL	ABNORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>3.0	<1.0	<1.0	<1.0
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >75	▲ 89	46	74
Chromium	ppm	ASTM D5185m >5	3	3	3
Nickel	ppm	ASTM D5185m >4	<1	6	<1
Titanium	ppm	ASTM D5185m >2	<1	<1	0
Silver	ppm	ASTM D5185m >2	<1	<1	0
Aluminum	ppm	ASTM D5185m >15	10	3	7
Lead	ppm	ASTM D5185m >25	11	3	5
Copper	ppm	ASTM D5185m >100	6	42	▲ 172
Tin	ppm	ASTM D5185m >4	2	2	2
Vanadium	ppm	ASTM D5185m	0	<1	0
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	18	3	3
Barium	ppm	ASTM D5185m 0	0	0	0
Molybdenum	ppm	ASTM D5185m 60	84	62	61
Manganese	ppm	ASTM D5185m 0	1	1	1
Magnesium	ppm	ASTM D5185m 1010	194	947	930
Calcium	ppm	ASTM D5185m 1070	2128	1041	1198
Phosphorus	ppm	ASTM D5185m 1150	1014	1010	942
Zinc	ppm	ASTM D5185m 1270	1272	1302	1291
Sulfur	ppm	ASTM D5185m 2060	3750	3372	2749

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	16	13	16
Sodium	ppm	ASTM D5185m	4	8	6
Potassium	ppm	ASTM D5185m >20	<1	3	1

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >6	3.2	0.8	1.4
Nitration	Abs/cm	*ASTM D7624 >20	15.3	9.3	12.0
Sulfation	Abs/.1mm	*ASTM D7415 >30	30.5	21.2	23.8


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	24.0	17.6	20.5
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	4.7	8.3	7.7




OIL ANALYSIS REPORT


▲ Ferrous Alloys

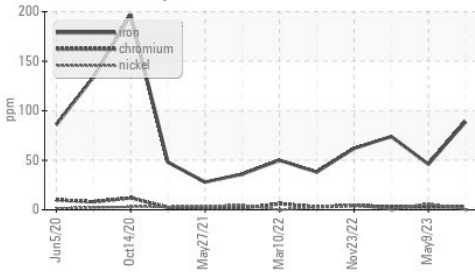

Base Number

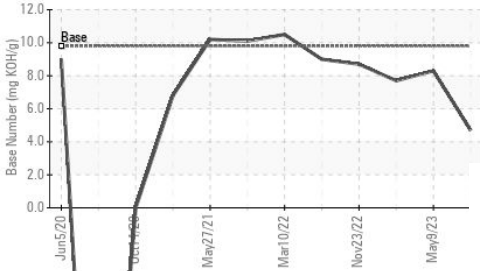

Viscosity @ 100°C

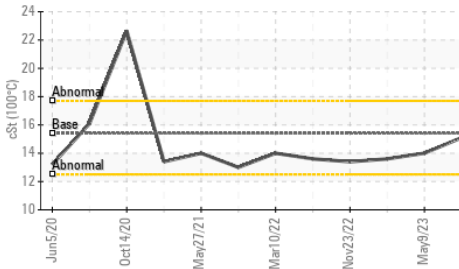

VISUAL


Property	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES


Property	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	15.1	14.0

GRAPHS


▲ Ferrous Alloys

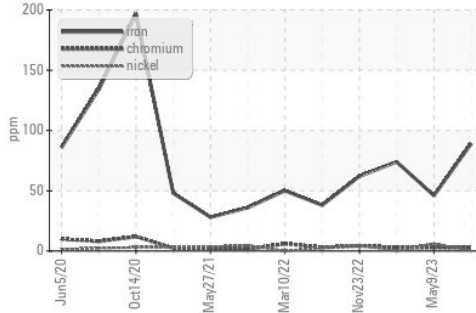


Non-ferrous Metals

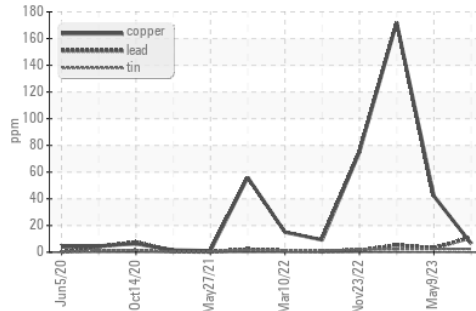

Viscosity @ 100°C

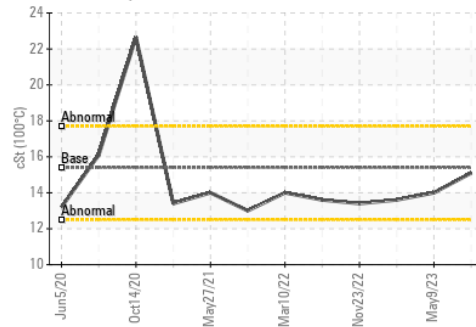

Base Number

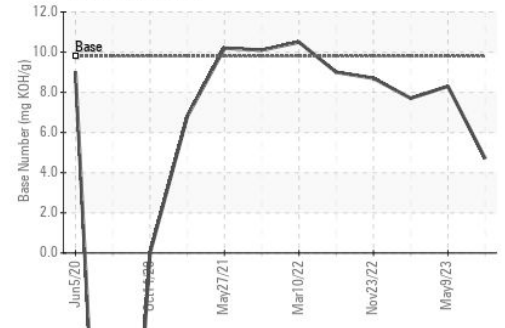

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0096933
Lab Number : 06134494
Unique Number : 10953959
Test Package : FLEET

Received : 01 Apr 2024
Tested : 02 Apr 2024
Diagnosed : 03 Apr 2024 - Sean Felton

GFL Environmental - 015 - Columbia
 7800 Farrow Road
 Columbia, SC
 US 29203-3219
 Contact: NOEL MATTHEWS
 nmatthewsjr@gflenv.com
 T: (803)935-0249
 F: (803)935-0244

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)