




# OIL ANALYSIS REPORT

## Sample Rating Trend

**NORMAL**



Area  
**(GBD071)**  
Machine Id  
**MACK 813005**  
Component  
**Diesel Engine**  
Fluid  
**DIESEL ENGINE OIL SAE 40 (--- GAL)**

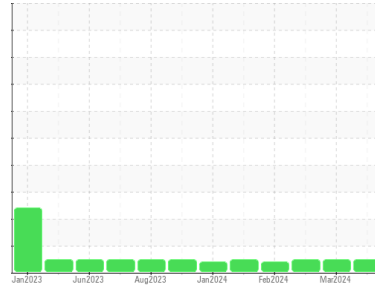

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

method	limit/base	current	history1	history2
Sample Number	Client Info	<b>GFL0116786</b>	GFL0109028	GFL0109038
Sample Date	Client Info	<b>27 Mar 2024</b>	13 Mar 2024	05 Mar 2024
Machine Age	hrs	<b>3684</b>	3617	3587
Oil Age	hrs	<b>3684</b>	3617	3587
Oil Changed	Client Info	<b>N/A</b>	Not Changd	N/A
Sample Status		<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

method	limit/base	current	history1	history2
Fuel	WC Method >3.0	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method >0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method	<b>NEG</b>	NEG	NEG

## WEAR METALS

method	limit/base	current	history1	history2
Iron	ppm ASTM D5185m >120	<b>4</b>	10	15
Chromium	ppm ASTM D5185m >20	<b>&lt;1</b>	0	<1
Nickel	ppm ASTM D5185m >5	<b>&lt;1</b>	0	3
Titanium	ppm ASTM D5185m >2	<b>&lt;1</b>	0	<1
Silver	ppm ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm ASTM D5185m >20	<b>2</b>	<1	2
Lead	ppm ASTM D5185m >40	<b>0</b>	0	0
Copper	ppm ASTM D5185m >330	<b>&lt;1</b>	0	1
Tin	ppm ASTM D5185m >15	<b>&lt;1</b>	0	<1
Vanadium	ppm ASTM D5185m	<b>0</b>	0	<1
Cadmium	ppm ASTM D5185m	<b>&lt;1</b>	0	0

## ADDITIVES

method	limit/base	current	history1	history2
Boron	ppm ASTM D5185m 250	<b>12</b>	17	6
Barium	ppm ASTM D5185m 10	<b>0</b>	0	0
Molybdenum	ppm ASTM D5185m 100	<b>60</b>	58	61
Manganese	ppm ASTM D5185m	<b>&lt;1</b>	0	0
Magnesium	ppm ASTM D5185m 450	<b>810</b>	776	793
Calcium	ppm ASTM D5185m 3000	<b>1103</b>	1172	1101
Phosphorus	ppm ASTM D5185m 1150	<b>875</b>	927	870
Zinc	ppm ASTM D5185m 1350	<b>1126</b>	1162	1143
Sulfur	ppm ASTM D5185m 4250	<b>2994</b>	3353	2825

## CONTAMINANTS

method	limit/base	current	history1	history2
Silicon	ppm ASTM D5185m >25	<b>4</b>	3	4
Sodium	ppm ASTM D5185m >216	<b>0</b>	<1	2
Potassium	ppm ASTM D5185m >20	<b>2</b>	0	3

## INFRA-RED



method	limit/base	current	history1	history2
Soot %	% *ASTM D7844 >4	<b>0.1</b>	0.3	0.6
Nitration	Abs/cm *ASTM D7624 >20	<b>5.0</b>	6.7	8.8
Sulfation	Abs/.1mm *ASTM D7415 >30	<b>16.6</b>	17.7	19.1

## FLUID DEGRADATION

method	limit/base	current	history1	history2
Oxidation	Abs/.1mm *ASTM D7414 >25	<b>11.9</b>	12.7	14.2
Base Number (BN)	mg KOH/g ASTM D2896 8.5	<b>8.2</b>	7.4	5.2







# OIL ANALYSIS REPORT

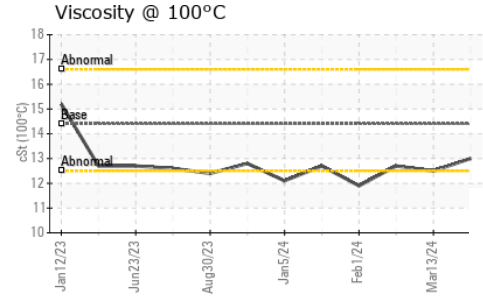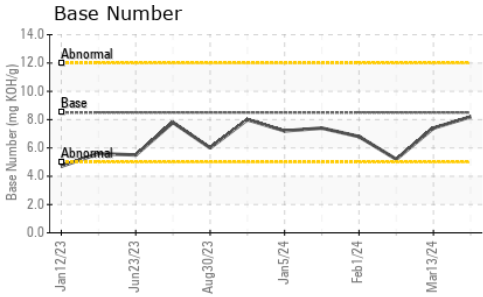

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	14.4	<b>13.0</b>	12.5	12.7

## GRAPHS

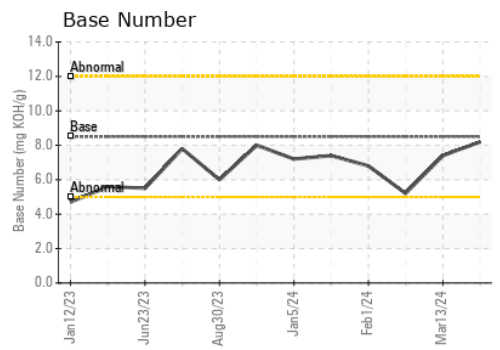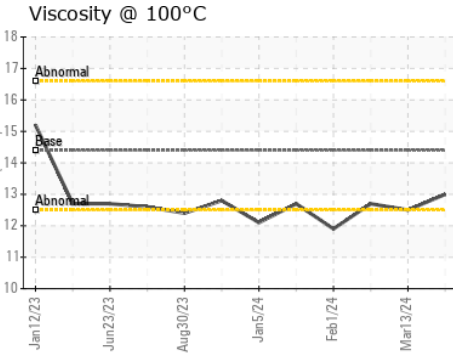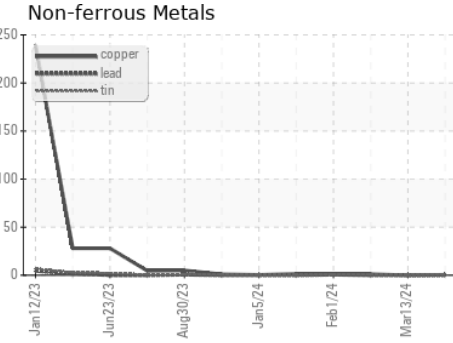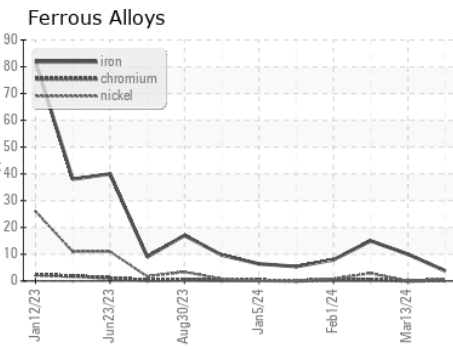

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0116786 **Received** : 01 Apr 2024  
**Lab Number** : **06134687** **Tested** : 02 Apr 2024  
**Unique Number** : 10954152 **Diagnosed** : 02 Apr 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 009 - Fairburn**  
 6905 Roosevelt Hwy  
 Fairburn, GA  
 US 30213  
 Contact: Eric Jones  
 erjones@gflenv.com  
 T: (678)630-9927  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.  
 \* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.  
 Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)