




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

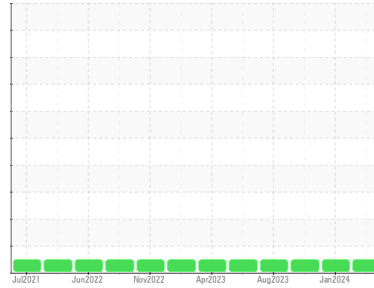

Machine Id  
**940008-192501**  
 Component  
**Natural Gas Engine**  
 Fluid  
**PETRO CANADA DURON GEO LD 15W40 (8 GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0110807</b>	GFL0088463	GFL0073225
Sample Date	Client Info		<b>25 Mar 2024</b>	12 Jan 2024	16 Nov 2023
Machine Age	hrs	Client Info	<b>12447</b>	11880	11267
Oil Age	hrs	Client Info	<b>600</b>	600	650
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2	
Iron	ppm	ASTM D5185m	>50	<b>16</b>	11	29
Chromium	ppm	ASTM D5185m	>5	<b>1</b>	<1	3
Nickel	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	1
Titanium	ppm	ASTM D5185m	>5	<b>&lt;1</b>	0	<1
Silver	ppm	ASTM D5185m	>3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m	>25	<b>2</b>	2	6
Lead	ppm	ASTM D5185m	>40	<b>&lt;1</b>	<1	3
Copper	ppm	ASTM D5185m	>150	<b>&lt;1</b>	<1	<1
Tin	ppm	ASTM D5185m	>4	<b>&lt;1</b>	<1	1
Vanadium	ppm	ASTM D5185m		<b>0</b>	<1	<1
Cadmium	ppm	ASTM D5185m		<b>&lt;1</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2	
Boron	ppm	ASTM D5185m	50	<b>11</b>	13	9
Barium	ppm	ASTM D5185m	5	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	50	<b>71</b>	75	89
Manganese	ppm	ASTM D5185m	0	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	560	<b>608</b>	619	797
Calcium	ppm	ASTM D5185m	1510	<b>1805</b>	1678	2314
Phosphorus	ppm	ASTM D5185m	780	<b>720</b>	806	1113
Zinc	ppm	ASTM D5185m	870	<b>1052</b>	1034	1452
Sulfur	ppm	ASTM D5185m	2040	<b>2656</b>	2560	2875

## CONTAMINANTS

	method	limit/base	current	history1	history2	
Silicon	ppm	ASTM D5185m	>25	<b>7</b>	5	10
Sodium	ppm	ASTM D5185m		<b>7</b>	7	14
Potassium	ppm	ASTM D5185m	>20	<b>2</b>	0	<1

## INFRA-RED



	method	limit/base	current	history1	history2	
Soot %	%	*ASTM D7844		<b>0</b>	0	0.1
Nitration	Abs/cm	*ASTM D7624	>20	<b>11.9</b>	11.5	12.7
Sulfation	Abs.1mm	*ASTM D7415	>30	<b>23.2</b>	23.4	27.8

## FLUID DEGRADATION

	method	limit/base	current	history1	history2	
Oxidation	Abs.1mm	*ASTM D7414	>25	<b>19.1</b>	18.9	20.7
Base Number (BN)	mg KOH/g	ASTM D2896	10.2	<b>4.6</b>	4.5	4.7







# OIL ANALYSIS REPORT

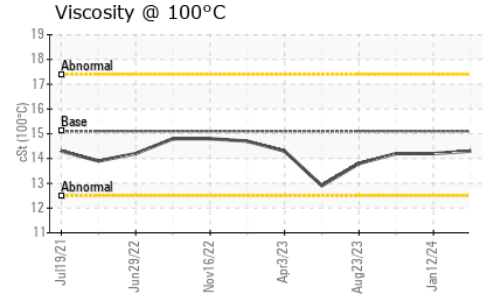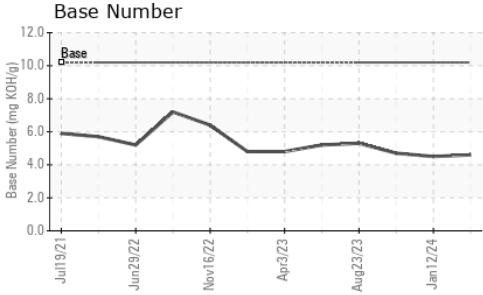

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES		method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	<b>14.3</b>	14.2	14.2

## GRAPHS

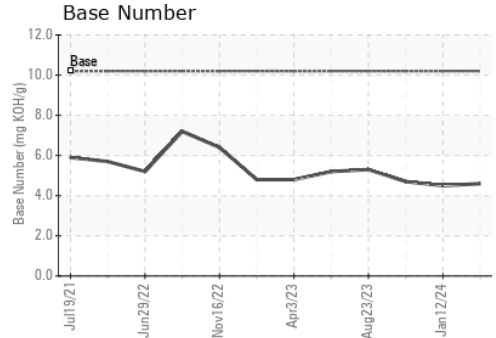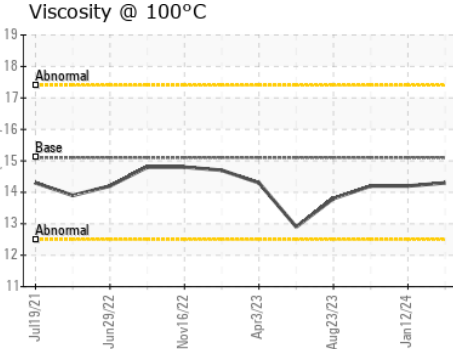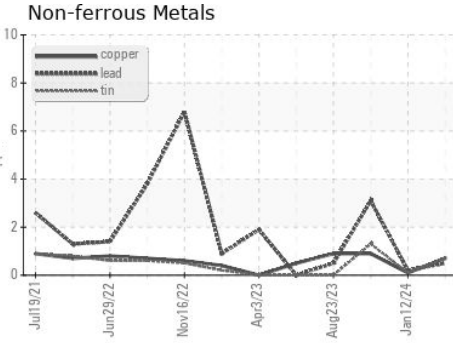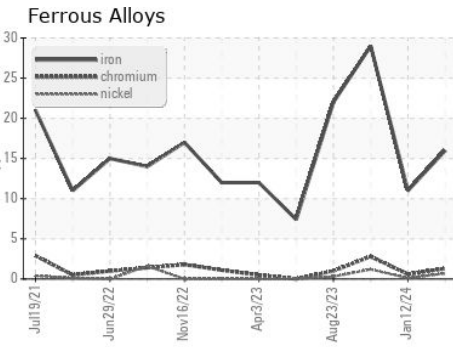

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0110807  
**Lab Number** : **06134695**  
**Unique Number** : 10954160  
**Test Package** : FLEET  
**Received** : 01 Apr 2024  
**Tested** : 02 Apr 2024  
**Diagnosed** : 02 Apr 2024 - Wes Davis

**GFL Environmental - 146 - Augusta**  
 1064 Franke Industrial  
 Augusta, GA  
 US 30909  
 Contact: JEFFERY WASHINGTON  
 jeff.washington@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: