


# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**

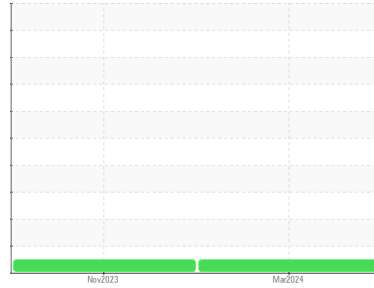

Area  
**(P798444) Preferred Service-Tractor**  
 Machine Id  
**[Preferred Service-Tractor] 192A01734**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 10W30 (36 QTS)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0120199</b>	PCA0109424	---
Sample Date	Client Info		<b>21 Mar 2024</b>	27 Nov 2023	---
Machine Age	mls	Client Info	<b>462009</b>	452153	---
Oil Age	mls	Client Info	<b>9856</b>	11680	---
Oil Changed	Client Info		<b>Changed</b>	Changed	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>6.0	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>14</b>	12	---
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	0	---
Nickel	ppm	ASTM D5185m >2	<b>&lt;1</b>	0	---
Titanium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	---
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >25	<b>3</b>	2	---
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	<1	---
Copper	ppm	ASTM D5185m >330	<b>3</b>	3	---
Tin	ppm	ASTM D5185m >15	<b>1</b>	<1	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 2	<b>&lt;1</b>	<1	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 50	<b>62</b>	56	---
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	0	---
Magnesium	ppm	ASTM D5185m 950	<b>976</b>	968	---
Calcium	ppm	ASTM D5185m 1050	<b>1128</b>	1149	---
Phosphorus	ppm	ASTM D5185m 995	<b>991</b>	1069	---
Zinc	ppm	ASTM D5185m 1180	<b>1263</b>	1264	---
Sulfur	ppm	ASTM D5185m 2600	<b>3218</b>	2837	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	2	---
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	6	---
Potassium	ppm	ASTM D5185m >20	<b>2</b>	0	---



## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.5</b>	0.6	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.0</b>	8.8	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>19.9</b>	20.3	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>16.5</b>	16.1	---
Base Number (BN)	mg KOH/g	ASTM D2896	<b>6.8</b>	7.1	---





# OIL ANALYSIS REPORT

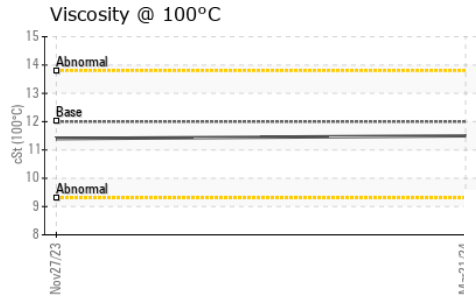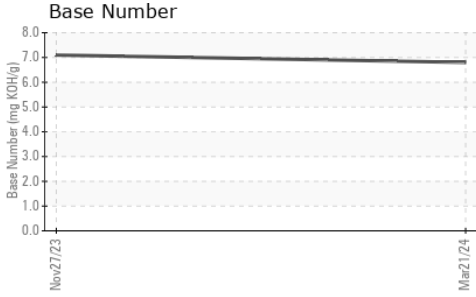

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	12.00	<b>11.5</b>	11.4	---

## GRAPHS

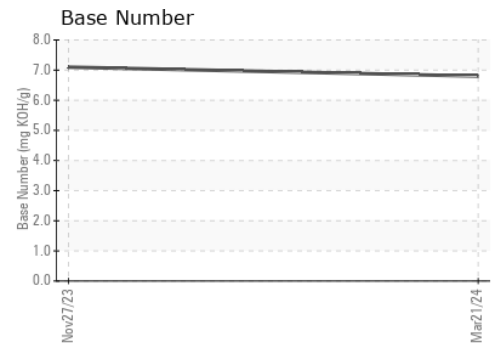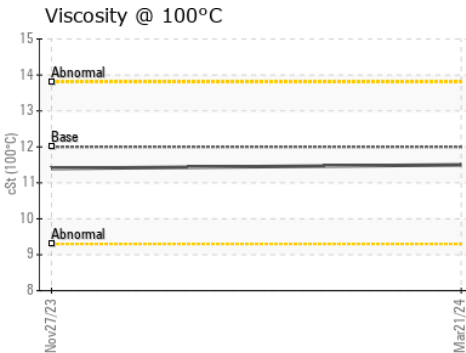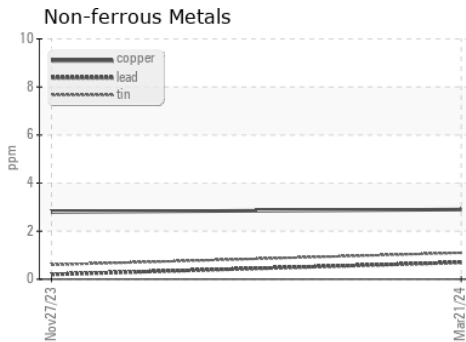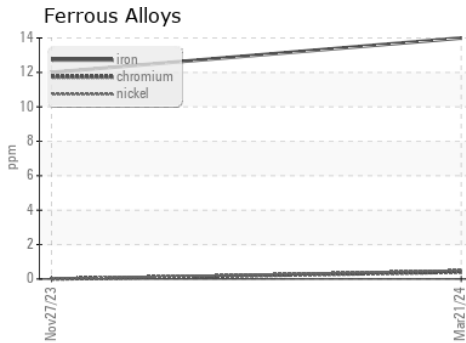

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0120199  
**Lab Number** : **06134719**  
**Unique Number** : 10954184  
**Test Package** : FLEET

**Received** : 01 Apr 2024  
**Tested** : 02 Apr 2024  
**Diagnosed** : 02 Apr 2024 - Wes Davis

**Transervice - Shop 1920 - Preferred Service**  
 1955 W. North Avenue, Bldg K  
 Melrose Park, IL  
 US 60160  
 Contact: Tom Lindeman  
 tlindemann@transervice.com  
 T: (630)376-8946  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)