




# OIL ANALYSIS REPORT

Sample Rating Trend

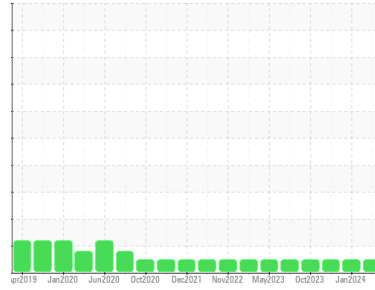

**NORMAL**



Machine Id  
**828058-101262**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (--- GAL)**

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0095315</b>	GFL0104993	GFL0105004
Sample Date	Client Info		<b>28 Mar 2024</b>	29 Jan 2024	21 Dec 2023
Machine Age	hrs	Client Info	<b>13517</b>	13294	13128
Oil Age	hrs	Client Info	<b>0</b>	0	100
Oil Changed	Client Info		<b>Not Changed</b>	Not Changd	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>7</b>	28	40
Chromium	ppm	ASTM D5185m >20	<b>&lt;1</b>	2	1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	0	0
Titanium	ppm	ASTM D5185m	<b>8</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >20	<b>2</b>	13	21
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	<1	0
Copper	ppm	ASTM D5185m >330	<b>&lt;1</b>	1	2
Tin	ppm	ASTM D5185m >15	<b>&lt;1</b>	<1	0
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>16</b>	<1	3
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	<1
Molybdenum	ppm	ASTM D5185m 60	<b>61</b>	59	63
Manganese	ppm	ASTM D5185m 0	<b>&lt;1</b>	<1	1
Magnesium	ppm	ASTM D5185m 1010	<b>934</b>	1017	916
Calcium	ppm	ASTM D5185m 1070	<b>1168</b>	1069	1034
Phosphorus	ppm	ASTM D5185m 1150	<b>971</b>	1028	1061
Zinc	ppm	ASTM D5185m 1270	<b>1227</b>	1212	1221
Sulfur	ppm	ASTM D5185m 2060	<b>3394</b>	2789	2808

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>5</b>	6	7
Sodium	ppm	ASTM D5185m	<b>22</b>	15	13
Potassium	ppm	ASTM D5185m >20	<b>28</b>	26	35

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	1	1.1
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.0</b>	9.2	8.3
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.2</b>	20.8	20.2

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>13.3</b>	16.1	14.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>9.1</b>	7.3	8.5







# OIL ANALYSIS REPORT

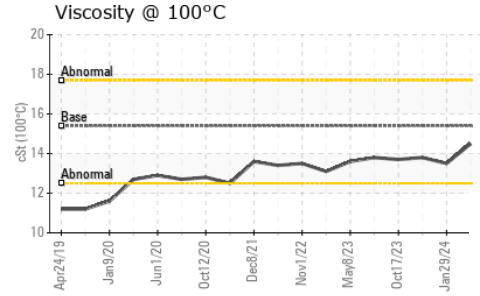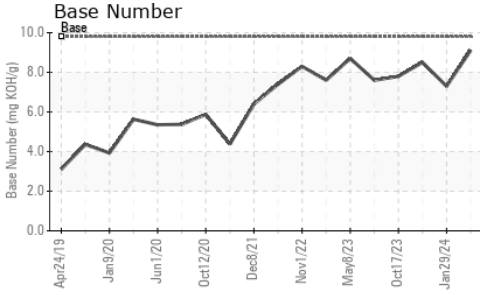

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.5	13.5

## GRAPHS

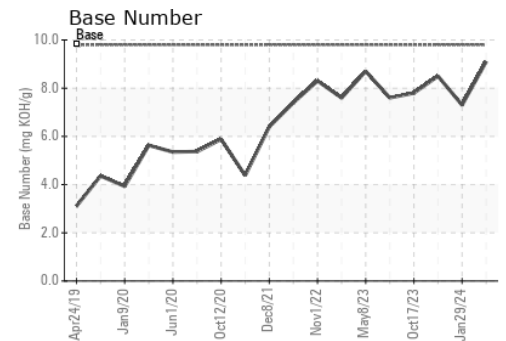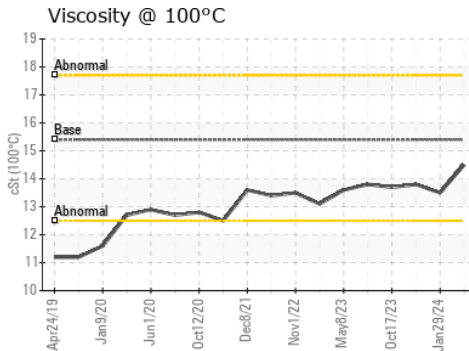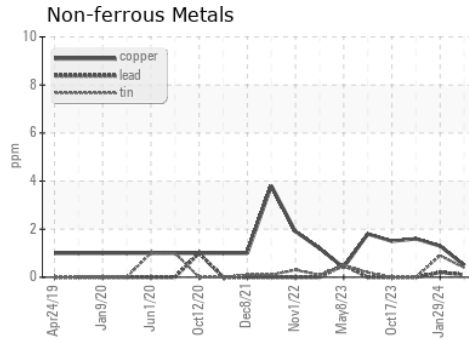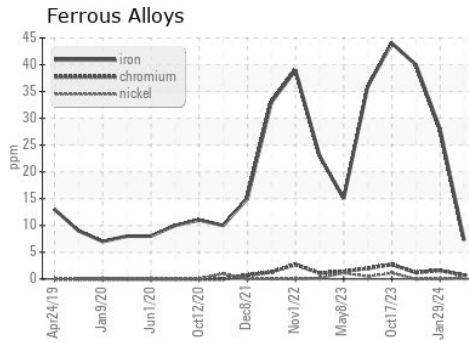

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
 Sample No. : GFL0095315  
 Lab Number : 06134729  
 Unique Number : 10954194  
 Test Package : FLEET

Received : 01 Apr 2024  
 Tested : 02 Apr 2024  
 Diagnosed : 02 Apr 2024 - Wes Davis

GFL Environmental - 893 - OK East Hauling  
 2100 Lilly Street  
 Seminole, OK  
 US 74868

Contact: Roger Barlow  
 rbarlow@gflenv.com

T: (405)204-6183

F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)