


# OIL ANALYSIS REPORT



Area  
**KEMP QUARRIES / NEOSHO [67515]**  
Machine Id  
**OHT052**  
Component  
**Diesel Engine**  
Fluid  
**PETRO CANADA 15W40 (--- GAL)**

Sample Rating Trend

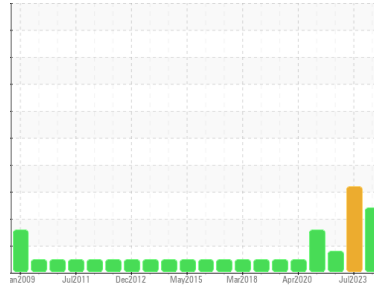

**DEGRADATION**



## DIAGNOSIS

### Recommendation

We advise that you check for faulty combustion, plugged air filters, or aftercoolers. Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor. NOTE: High solids (carbon/soot) in the sample have limited the accuracy of Infra-Red data including Total Base Number (TBN) value. ( Customer Sample Comment: PM-3 changed filters and fluid )

### Wear

All component wear rates are normal.

### Contamination

There is an abnormal amount of solids and carbon present in the oil.

### Fluid Condition

The oil viscosity is higher than normal. The BN level is low.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>PCA0109266</b>	PCA0084522	PCA0062059
Sample Date	Client Info		<b>28 Mar 2024</b>	31 Jul 2023	29 Dec 2022
Machine Age	hrs	Client Info	<b>21806</b>	21296	20780
Oil Age	hrs	Client Info	<b>21806</b>	21296	20780
Oil Changed	Client Info		<b>Changed</b>	Changed	Changed
Sample Status			<b>ABNORMAL</b>	SEVERE	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>87</b>	76	70
Chromium	ppm	ASTM D5185m >20	<b>2</b>	3	3
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	0
Titanium	ppm	ASTM D5185m >2	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>6</b>	5	3
Lead	ppm	ASTM D5185m >40	<b>2</b>	3	3
Copper	ppm	ASTM D5185m >330	<b>4</b>	4	4
Tin	ppm	ASTM D5185m >15	<b>1</b>	3	3
Antimony	ppm	ASTM D5185m	<b>---</b>	---	---
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>&lt;1</b>	0	5
Barium	ppm	ASTM D5185m	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m	<b>55</b>	59	55
Manganese	ppm	ASTM D5185m	<b>&lt;1</b>	<1	<1
Magnesium	ppm	ASTM D5185m	<b>953</b>	901	837
Calcium	ppm	ASTM D5185m	<b>1092</b>	1058	1163
Phosphorus	ppm	ASTM D5185m	<b>1010</b>	981	1015
Zinc	ppm	ASTM D5185m	<b>1162</b>	1170	1201
Sulfur	ppm	ASTM D5185m	<b>3276</b>	3071	3584

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	6	11
Sodium	ppm	ASTM D5185m	<b>3</b>	<1	2
Potassium	ppm	ASTM D5185m >20	<b>0</b>	<1	1
Fuel	%	ASTM D3524 >5	<b>&lt;1.0</b>	<1.0	<1.0





## INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>▲ 4.9</b>	▲ 5	▲ 3
Nitration	Abs/cm	*ASTM D7624 >20	<b>9.2</b>	10.8	9.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>30.3</b>	29.4	24.3

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>12.2</b>	14.2	14.8
Base Number (BN)	mg KOH/g	ASTM D2896	<b>▲ 0.0</b>	▲ 0.0	9.6









# OIL ANALYSIS REPORT

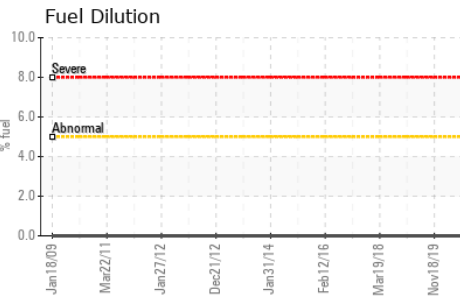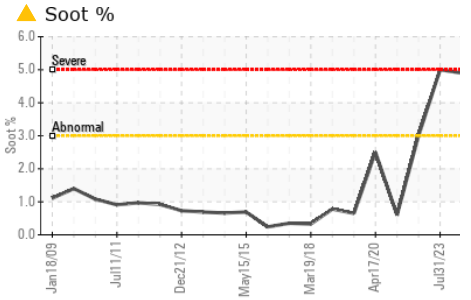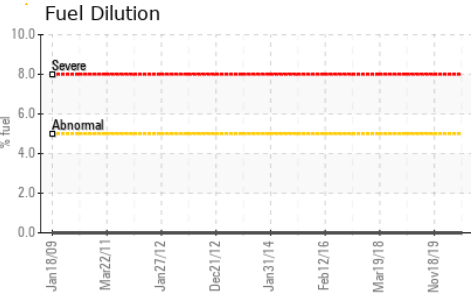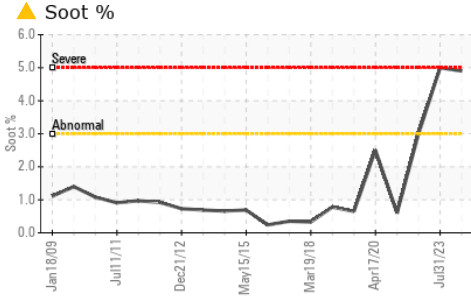

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	▲ 19.7	15.2	13.7

## GRAPHS

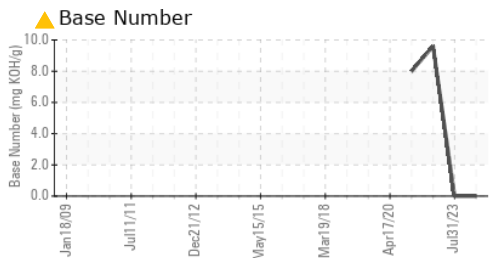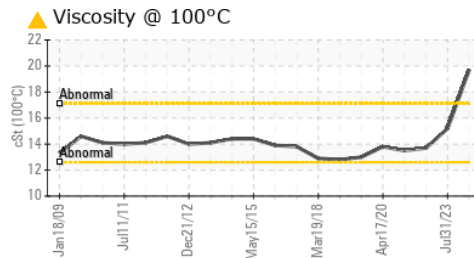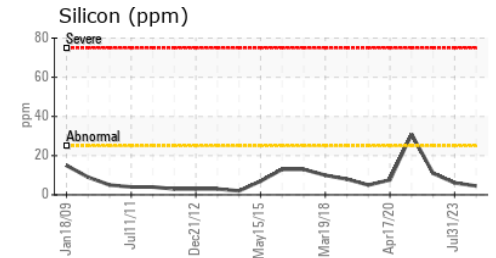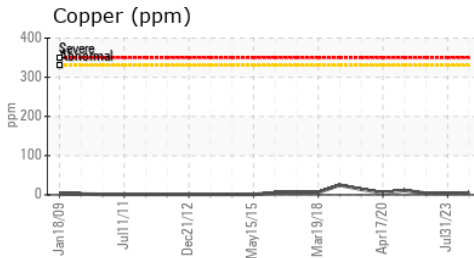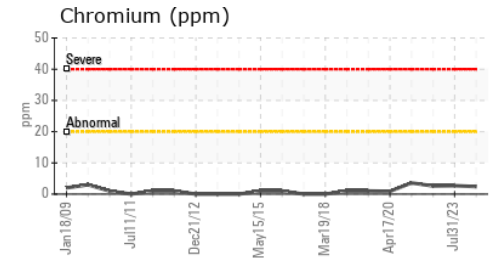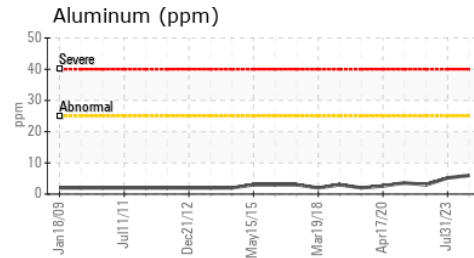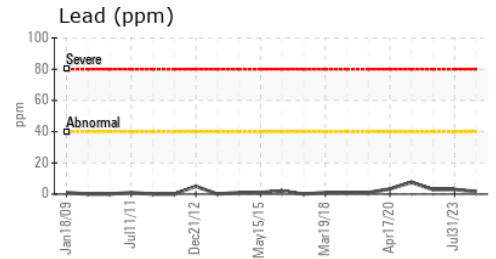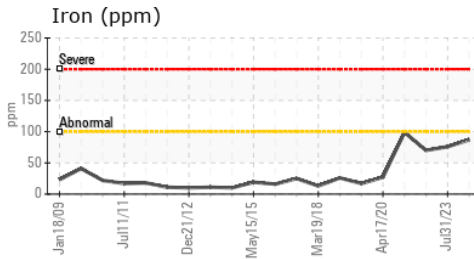

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : PCA0109266 **Received** : 01 Apr 2024  
**Lab Number** : 06135430 **Tested** : 02 Apr 2024  
**Unique Number** : 10954895 **Diagnosed** : 02 Apr 2024 - Jonathan Hester  
**Test Package** : MOB 1 ( Additional Tests: FuelDilution, TBN )

**Kemp Quarries - Kemp Stone - Neosho**  
 19148 Ingersol Lane  
 Neosho, MO  
 US 64850  
 Contact:  
 neosho@kempstone.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: