



# OIL ANALYSIS REPORT

Sample Rating Trend


**NORMAL**



Machine Id  
**827035-1039**

Component  
**Diesel Engine**

Fluid  
**PETRO CANADA DURON SHP 15W40 (22 QTS)**

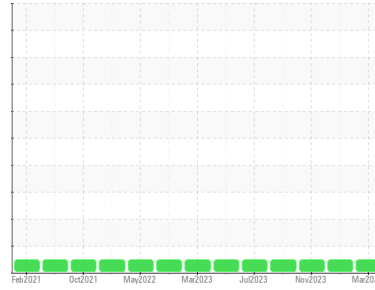

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0110336</b>	GFL0102766	GFL0102783
Sample Date	Client Info		<b>28 Mar 2024</b>	30 Dec 2023	30 Nov 2023
Machine Age	hrs	Client Info	<b>14321</b>	13857	13654
Oil Age	hrs	Client Info	<b>580</b>	594	13267
Oil Changed	Client Info		<b>Changed</b>	Changed	Not Changed
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	<1.0
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>34</b>	29	19
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	0	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	0
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	<1
Aluminum	ppm	ASTM D5185m >30	<b>&lt;1</b>	1	2
Lead	ppm	ASTM D5185m >30	<b>0</b>	<1	<1
Copper	ppm	ASTM D5185m >150	<b>&lt;1</b>	1	<1
Tin	ppm	ASTM D5185m >5	<b>0</b>	0	<1
Vanadium	ppm	ASTM D5185m	<b>0</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>4</b>	4	5
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	0
Molybdenum	ppm	ASTM D5185m 60	<b>59</b>	63	61
Manganese	ppm	ASTM D5185m 0	<b>0</b>	0	<1
Magnesium	ppm	ASTM D5185m 1010	<b>949</b>	998	911
Calcium	ppm	ASTM D5185m 1070	<b>1158</b>	1138	1046
Phosphorus	ppm	ASTM D5185m 1150	<b>1020</b>	1030	1052
Zinc	ppm	ASTM D5185m 1270	<b>1225</b>	1303	1283
Sulfur	ppm	ASTM D5185m 2060	<b>3283</b>	2947	2893

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>3</b>	3	3
Sodium	ppm	ASTM D5185m	<b>6</b>	6	6
Potassium	ppm	ASTM D5185m >20	<b>&lt;1</b>	<1	2

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.6</b>	0.6	0.5
Nitration	Abs/cm	*ASTM D7624 >20	<b>11.2</b>	11.1	10.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>22.8</b>	22.8	21.6

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>21.6</b>	21.2	20.2
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>6.4</b>	6.5	6.3







# OIL ANALYSIS REPORT

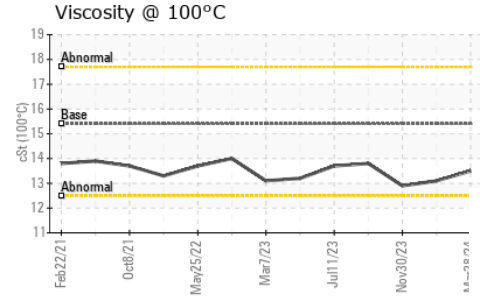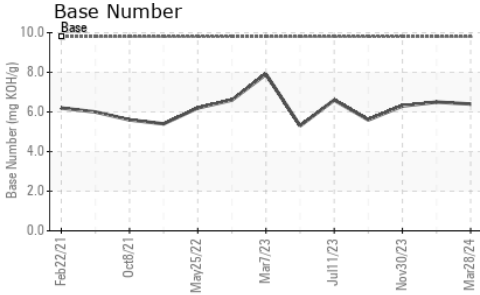

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>13.5</b>	13.1	12.9

## GRAPHS

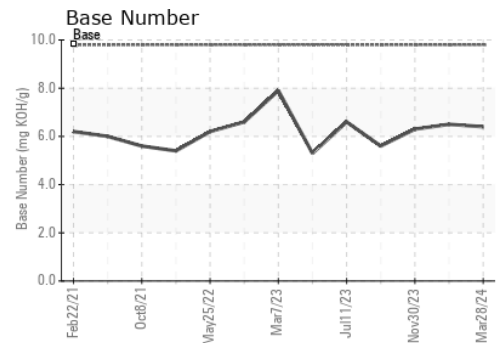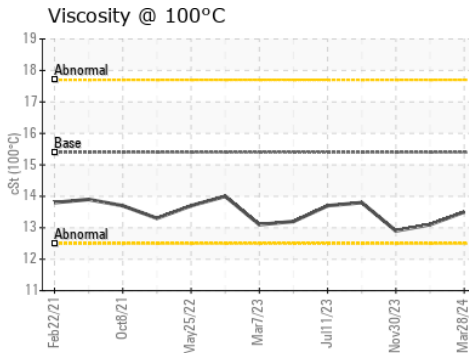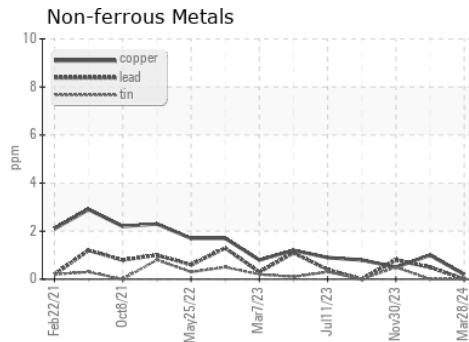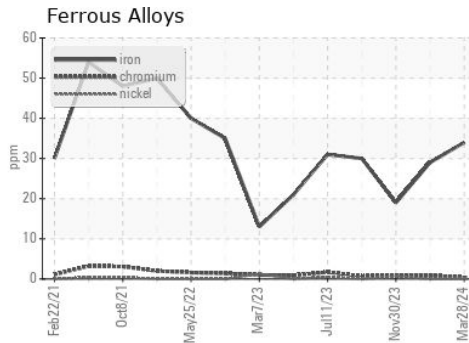

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0110336  
**Lab Number** : **06135542**  
**Unique Number** : 10955007  
**Test Package** : FLEET

**Received** : 01 Apr 2024  
**Tested** : 02 Apr 2024  
**Diagnosed** : 02 Apr 2024 - Wes Davis

**GFL Environmental - 622 - Traverse City Hauling**  
 160 Hughes Dr  
 Traverse City, MI  
 US 49686  
 Contact: GARY BREWER

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: