




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**(48023UA)**  
 Machine Id  
**934036**  
 Component  
**Natural Gas Engine**  
 Fluid  
**{not provided} (--- GAL)**

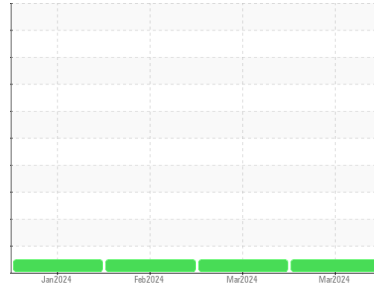

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor. Please specify the brand, type, and viscosity of the oil on your next sample.

### Wear

Metal levels are typical for a new component breaking in.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0111873</b>	GFL0111859	GFL0108284
Sample Date	Client Info		<b>29 Mar 2024</b>	07 Mar 2024	15 Feb 2024
Machine Age	hrs	Client Info	<b>906</b>	745	584
Oil Age	hrs	Client Info	<b>906</b>	745	584
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	Not Chngd
Sample Status			<b>NORMAL</b>	NORMAL	NORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	<b>31</b>	33	31
Chromium	ppm	ASTM D5185m >5	<b>&lt;1</b>	1	<1
Nickel	ppm	ASTM D5185m >4	<b>&lt;1</b>	1	<1
Titanium	ppm	ASTM D5185m >5	<b>0</b>	<1	<1
Silver	ppm	ASTM D5185m >3	<b>0</b>	<1	0
Aluminum	ppm	ASTM D5185m >25	<b>9</b>	9	8
Lead	ppm	ASTM D5185m >40	<b>&lt;1</b>	1	0
Copper	ppm	ASTM D5185m >150	<b>12</b>	13	15
Tin	ppm	ASTM D5185m >4	<b>1</b>	2	1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	<1	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	<b>4</b>	13	5
Barium	ppm	ASTM D5185m	<b>0</b>	0	3
Molybdenum	ppm	ASTM D5185m	<b>56</b>	55	47
Manganese	ppm	ASTM D5185m	<b>11</b>	12	12
Magnesium	ppm	ASTM D5185m	<b>717</b>	713	659
Calcium	ppm	ASTM D5185m	<b>1443</b>	1371	1135
Phosphorus	ppm	ASTM D5185m	<b>711</b>	756	617
Zinc	ppm	ASTM D5185m	<b>955</b>	972	854
Sulfur	ppm	ASTM D5185m	<b>2645</b>	2536	2117

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>25</b>	26	28
Sodium	ppm	ASTM D5185m	<b>5</b>	5	4
Potassium	ppm	ASTM D5185m >20	<b>23</b>	24	22

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	<b>0</b>	0	0.2
Nitration	Abs/cm	*ASTM D7624 >20	<b>12.5</b>	11.7	6.9
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>24.9</b>	23.3	17.0

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>22.3</b>	20.4	12.9
Base Number (BN)	mg KOH/g	ASTM D2896	<b>3.2</b>	4.7	5.8







# OIL ANALYSIS REPORT

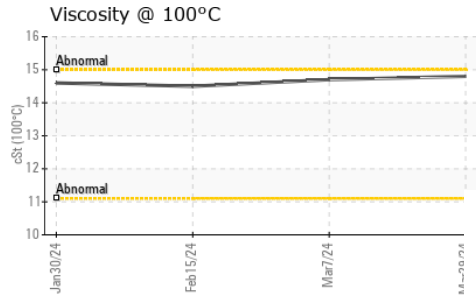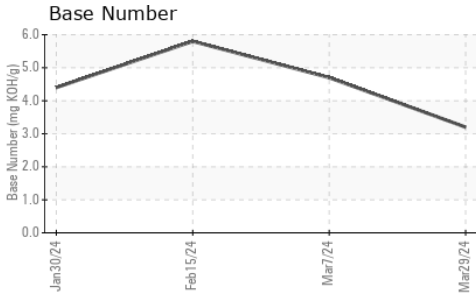

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	<b>14.8</b>	14.7	14.5

## GRAPHS

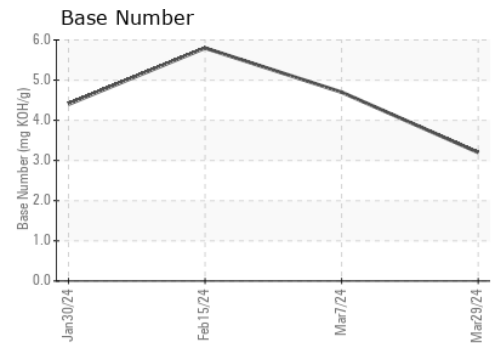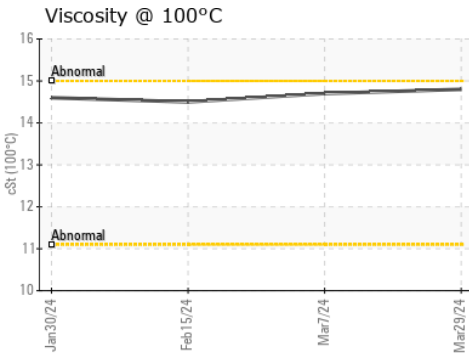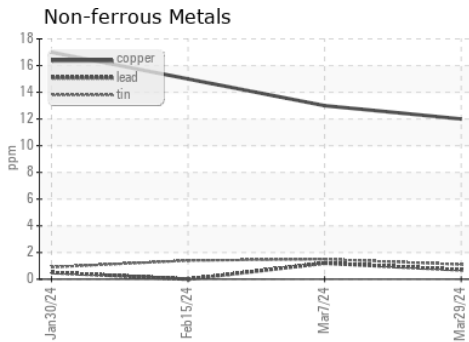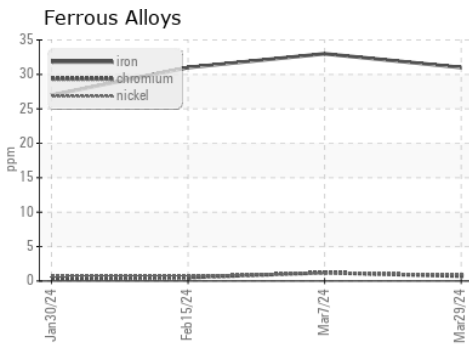

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0111873  
**Lab Number** : **06136807**  
**Unique Number** : 10956272  
**Test Package** : FLEET

**Received** : 02 Apr 2024  
**Tested** : 03 Apr 2024  
**Diagnosed** : 03 Apr 2024 - Wes Davis

**GFL Environmental - 652 - Fredericksburg Hauling**  
 10954 Houser Drive  
 Fredericksburg, VA  
 US 22408  
 Contact: WILLIAM MILO  
 wmilo@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:  
F: