

OIL ANALYSIS REPORT

Sample Rating Trend

DIRT

Area Walgreens - Tractor [Walgreens - Tractor] 136A624007

Diesel Engine

PETRO CANADA DURON SHP 10W30 (11 GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. No corrective action is recommended at this time. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.


Contamination

Elemental level of silicon (Si) above normal indicating ingress of seal material. Elevated aluminum (Al) and/or lead (Pb) and potassium (K) levels in your metals analysis are likely a result of solder flux release into the lubricant and is common on new equipment/components.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is acceptable for the time in service.

AL)				Mar2024		
SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0116427		
Sample Date		Client Info		20 Mar 2024		
Machine Age	mls	Client Info		31345		
Dil Age	mls	Client Info		31345		
Dil Changed		Client Info		Changed		
Sample Status				ABNORMAL		
CONTAMINAT	ION	method	limit/base	current	history1	history2
uel		WC Method	>2.0	<1.0		
Nater		WC Method	>0.2	NEG		
Glycol		WC Method		NEG		
WEAR METAL	S	method	limit/base	current	history1	history2
ron	ppm	ASTM D5185m	>100	42		
Chromium	ppm	ASTM D5185m	>20	1		
lickel	ppm	ASTM D5185m	>4	2		
ītanium	ppm	ASTM D5185m		0		
Silver	ppm	ASTM D5185m	>3	<1		
Aluminum	ppm	ASTM D5185m	>20	16		
ead	ppm	ASTM D5185m	>40	7		
Copper	ppm	ASTM D5185m	>330	28		
īn	ppm	ASTM D5185m	>15	6		
/anadium	ppm	ASTM D5185m		<1		
Cadmium	ppm	ASTM D5185m		0		
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	2	50		
Barium	ppm	ASTM D5185m	0	5		
Nolybdenum	ppm	ASTM D5185m	50	65		
Manganese	ppm	ASTM D5185m	0	5		
<i>A</i> agnesium	ppm	ASTM D5185m	950	477		
Calcium	ppm	ASTM D5185m	1050	1868		
Phosphorus	ppm	ASTM D5185m	995	1046		
Zinc	ppm	ASTM D5185m	1180	1328		
Sulfur	ppm	ASTM D5185m		3601		
CONTAMINAN	ITS	method	limit/base	current	history1	history2
Silicon	ppm		>25	<mark>/</mark> 38		
Sodium	ppm	ASTM D5185m		4		
Potassium	ppm	ASTM D5185m	>20	42		
INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>3	0.4		
Nitration	Abs/cm	*ASTM D7624	>20	9.0		
Sulfation	Abs/.1mm	*ASTM D7415	>30	21.8		
FLUID DEGRA	DATION		limit/base	current	history1	history2
Dxidation	Abs/.1mm	*ASTM D7414	>25	19.1		
o / i d d i o i i						

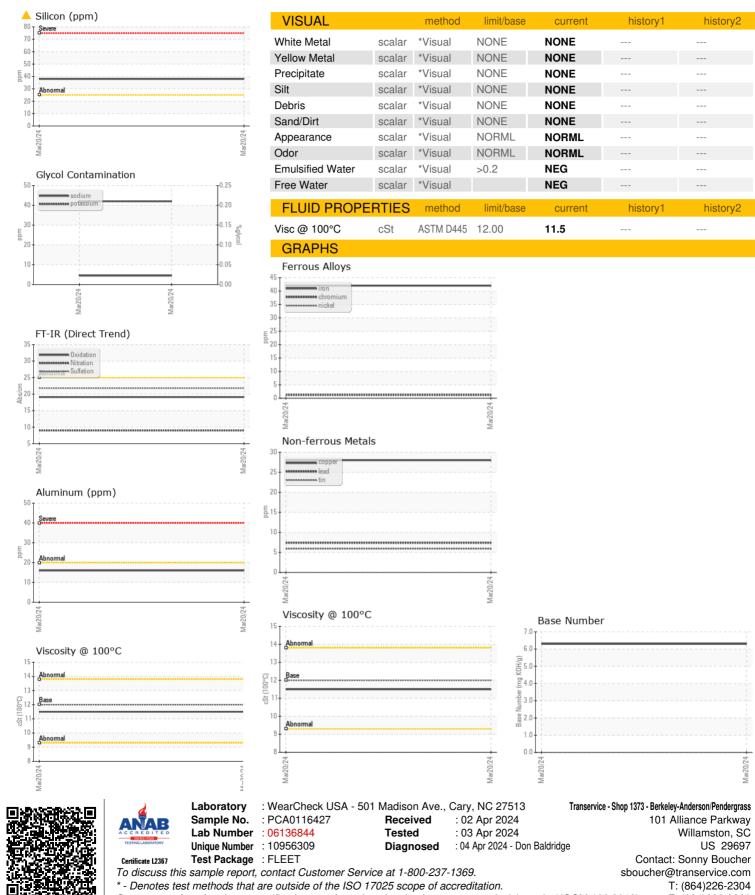

OIL ANALYSIS REPORT

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

OIL

DIAGNOSTICS

F: (864)226-2329