




OIL ANALYSIS REPORT

Sample Rating Trend

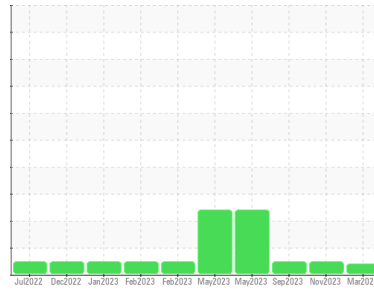

VISCOSITY



Machine Id
722027-361625
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (--- GAL)

DIAGNOSIS

Recommendation

Oil and filter change at the time of sampling has been noted. Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

Fluid Condition

The oil viscosity is lower than normal. The BN result indicates that there is suitable alkalinity remaining in the oil. Confirm oil type.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0106801	GFL0092107	GFL0084608
Sample Date	Client Info		28 Mar 2024	28 Nov 2023	18 Sep 2023
Machine Age	hrs	Client Info	2137	1918	239495
Oil Age	hrs	Client Info	600	600	0
Oil Changed	Client Info		Changed	Not Changd	Changed
Sample Status			ATTENTION	NORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	NEG	NEG	NEG
Glycol	WC Method		NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	15	36	76
Chromium	ppm	ASTM D5185m >5	<1	1	3
Nickel	ppm	ASTM D5185m >2	<1	0	1
Titanium	ppm	ASTM D5185m	53	0	<1
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >30	4	1	5
Lead	ppm	ASTM D5185m >30	<1	0	0
Copper	ppm	ASTM D5185m >150	<1	1	1
Tin	ppm	ASTM D5185m >5	1	0	<1
Vanadium	ppm	ASTM D5185m	<1	<1	<1
Cadmium	ppm	ASTM D5185m	0	0	0

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	63	0	1
Barium	ppm	ASTM D5185m 0	13	0	0
Molybdenum	ppm	ASTM D5185m 60	47	48	64
Manganese	ppm	ASTM D5185m 0	<1	<1	1
Magnesium	ppm	ASTM D5185m 1010	548	804	1026
Calcium	ppm	ASTM D5185m 1070	1689	926	1132
Phosphorus	ppm	ASTM D5185m 1150	801	867	1074
Zinc	ppm	ASTM D5185m 1270	1009	1043	1327
Sulfur	ppm	ASTM D5185m 2060	3272	2335	3632

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	7	6	11
Sodium	ppm	ASTM D5185m	7	22	43
Potassium	ppm	ASTM D5185m >20	6	4	9
Fuel	%	ASTM D3524 >5	0.3	<1.0	<1.0

INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	0.1	0.8	0.6
Nitration	Abs/cm	*ASTM D7624 >20	5.1	12.4	13.6
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.6	22.9	26.7

FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	17.9	22.8	24.4
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	10.5	7.4	8.4







OIL ANALYSIS REPORT

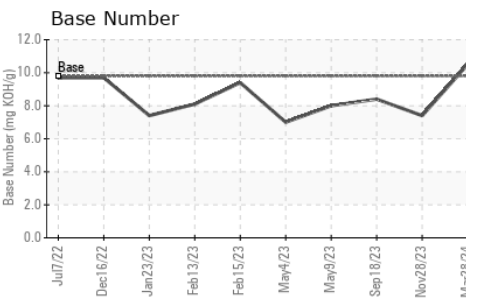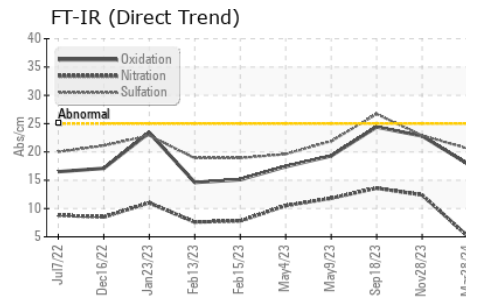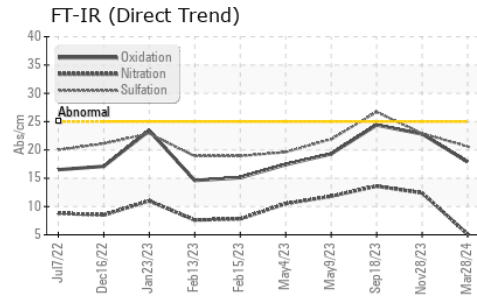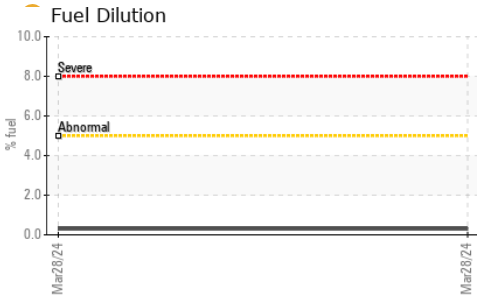

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	● 11.4	13.8	14.0

GRAPHS

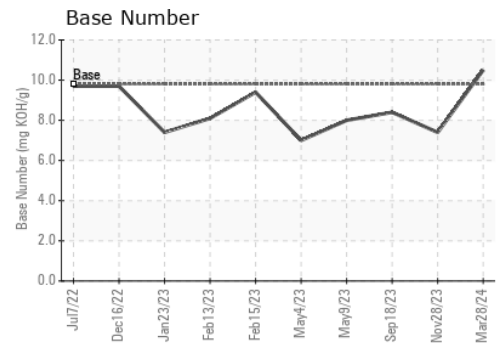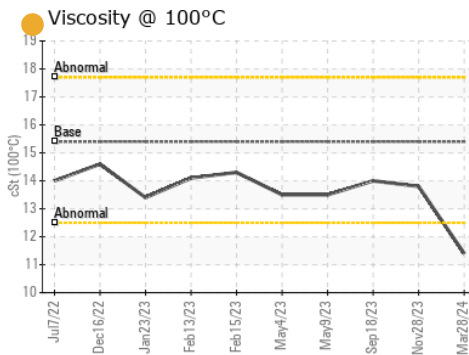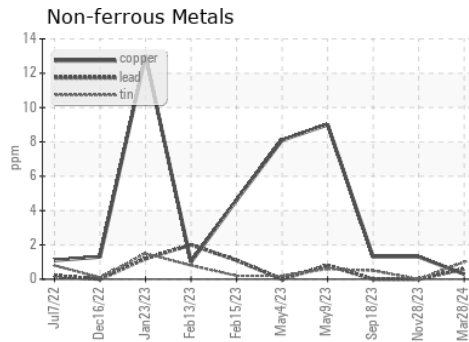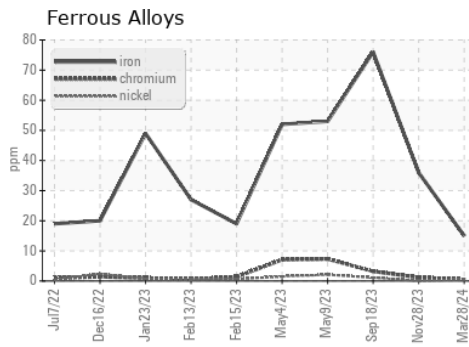

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
Sample No. : GFL0106801
Lab Number : 06136849
Unique Number : 10956314
Test Package : FLEET (Additional Tests: FuelDilution, PercentFuel)

GFL Environmental - 856 - Houston South
 8515 Highway 6 South
 Houston, TX
 US 77083
 Contact: Apolinar Zacarias
 pzacariascano@gflenv.com

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

T:
F: