




OIL ANALYSIS REPORT

Sample Rating Trend

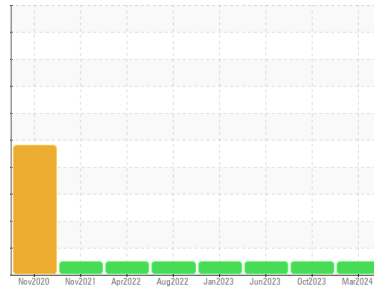

NORMAL



Machine Id
210009 HINO 155
 Component
Diesel Engine
 Fluid
 DIESEL ENGINE OIL SAE 40 (16 QTS)

DIAGNOSIS

Recommendation

Resample at the next service interval to monitor.

Wear

All component wear rates are normal.

Contamination

There is no indication of any contamination in the oil.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

SAMPLE INFORMATION

| | method | limit/base | current | history1 | history2 |
|---------------|-------------|-------------|--------------------|-------------|-------------|
| Sample Number | Client Info | | GFL0103231 | GFL0094701 | GFL0056697 |
| Sample Date | Client Info | | 29 Mar 2024 | 17 Oct 2023 | 05 Jun 2023 |
| Machine Age | mls | Client Info | 128209 | 114423 | 101518 |
| Oil Age | mls | Client Info | 13786 | 12905 | 10278 |
| Oil Changed | Client Info | | Changed | Changed | Changed |
| Sample Status | | | NORMAL | NORMAL | NORMAL |

CONTAMINATION

| | method | limit/base | current | history1 | history2 |
|--------|-----------|------------|----------------|----------|----------|
| Fuel | WC Method | >5 | <1.0 | <1.0 | <1.0 |
| Water | WC Method | >0.2 | NEG | NEG | NEG |
| Glycol | WC Method | | NEG | NEG | NEG |

WEAR METALS

| | method | limit/base | current | history1 | history2 |
|----------|--------|------------------|--------------|----------|----------|
| Iron | ppm | ASTM D5185m >100 | 21 | 17 | 33 |
| Chromium | ppm | ASTM D5185m >20 | <1 | <1 | 1 |
| Nickel | ppm | ASTM D5185m >4 | 0 | 0 | <1 |
| Titanium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Silver | ppm | ASTM D5185m >3 | 0 | 0 | 0 |
| Aluminum | ppm | ASTM D5185m >20 | 7 | 8 | 6 |
| Lead | ppm | ASTM D5185m >40 | 1 | 0 | 2 |
| Copper | ppm | ASTM D5185m >330 | 3 | 3 | 13 |
| Tin | ppm | ASTM D5185m >15 | <1 | <1 | <1 |
| Vanadium | ppm | ASTM D5185m | 0 | 0 | 0 |
| Cadmium | ppm | ASTM D5185m | 0 | 0 | 0 |

ADDITIVES

| | method | limit/base | current | history1 | history2 |
|------------|--------|------------------|-------------|----------|----------|
| Boron | ppm | ASTM D5185m 250 | 2 | 2 | 2 |
| Barium | ppm | ASTM D5185m 10 | 0 | <1 | 0 |
| Molybdenum | ppm | ASTM D5185m 100 | 65 | 62 | 64 |
| Manganese | ppm | ASTM D5185m | 1 | <1 | 1 |
| Magnesium | ppm | ASTM D5185m 450 | 1029 | 977 | 951 |
| Calcium | ppm | ASTM D5185m 3000 | 1145 | 1068 | 1143 |
| Phosphorus | ppm | ASTM D5185m 1150 | 1132 | 1048 | 992 |
| Zinc | ppm | ASTM D5185m 1350 | 1365 | 1310 | 1273 |
| Sulfur | ppm | ASTM D5185m 4250 | 3413 | 2878 | 3060 |

CONTAMINANTS

| | method | limit/base | current | history1 | history2 |
|-----------|--------|------------------|----------|----------|----------|
| Silicon | ppm | ASTM D5185m >25 | 8 | 6 | 6 |
| Sodium | ppm | ASTM D5185m >216 | 4 | 3 | <1 |
| Potassium | ppm | ASTM D5185m >20 | 3 | 2 | 5 |

INFRA-RED

| | method | limit/base | current | history1 | history2 |
|-----------|----------|-----------------|-------------|----------|----------|
| Soot % | % | *ASTM D7844 >3 | 2 | 1.7 | 1.7 |
| Nitration | Abs/cm | *ASTM D7624 >20 | 16.2 | 13.5 | 14.3 |
| Sulfation | Abs/.1mm | *ASTM D7415 >30 | 26.5 | 24.4 | 26.5 |


FLUID DEGRADATION

| | method | limit/base | current | history1 | history2 |
|------------------|----------|-----------------|-------------|----------|----------|
| Oxidation | Abs/.1mm | *ASTM D7414 >25 | 26.4 | 22.7 | 26.9 |
| Base Number (BN) | mg KOH/g | ASTM D2896 8.5 | 7.4 | 7.2 | 7.2 |




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

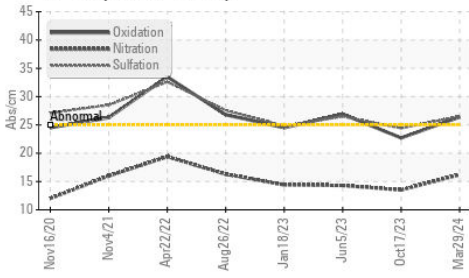

Base Number

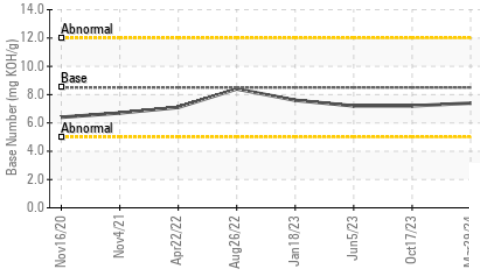

Viscosity @ 100°C

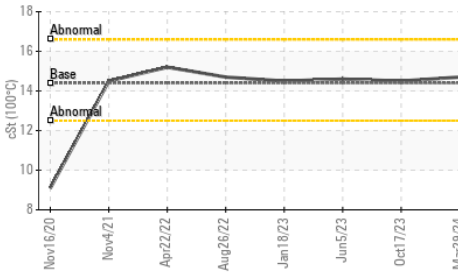


| VISUAL | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| White Metal | scalar | *Visual | NONE | NONE | NONE |
| Yellow Metal | scalar | *Visual | NONE | NONE | NONE |
| Precipitate | scalar | *Visual | NONE | NONE | NONE |
| Silt | scalar | *Visual | NONE | NONE | NONE |
| Debris | scalar | *Visual | NONE | NONE | NONE |
| Sand/Dirt | scalar | *Visual | NONE | NONE | NONE |
| Appearance | scalar | *Visual | NORML | NORML | NORML |
| Odor | scalar | *Visual | NORML | NORML | NORML |
| Emulsified Water | scalar | *Visual | >0.2 | NEG | NEG |
| Free Water | scalar | *Visual | | NEG | NEG |


| FLUID PROPERTIES | method | limit/base | current | history1 | history2 |
|------------------|--------|------------|---------|----------|----------|
| Visc @ 100°C | cSt | ASTM D445 | 14.4 | 14.7 | 14.5 |

GRAPHS


Ferrous Alloys

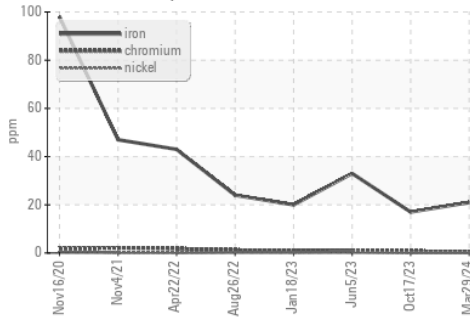


Non-ferrous Metals

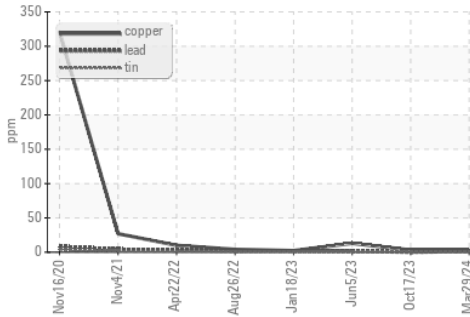

Viscosity @ 100°C

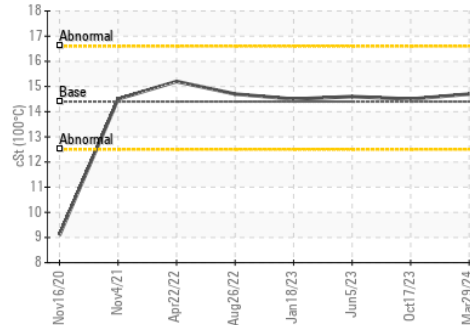

Base Number

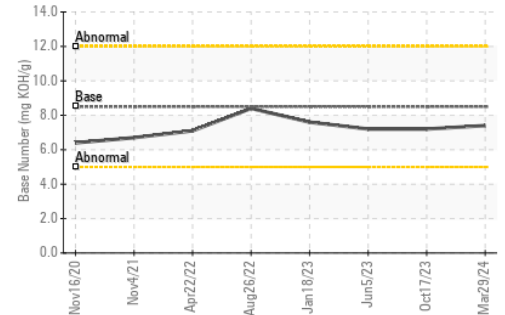

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513
 Sample No. : GFL0103231
 Lab Number : 06137054
 Unique Number : 10956519
 Test Package : FLEET

Received : 03 Apr 2024
 Tested : 03 Apr 2024
 Diagnosed : 05 Apr 2024 - Sean Felton

GFL Environmental - 001 - Raleigh(CNG)
 3741 Conquest Drive
 Garner, NC
 US 27529

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Contact: Craig Johnson
 craig.johnson@gflenv.com

T: (919)662-7100

F: (919)662-7130