




OIL ANALYSIS REPORT

Sample Rating Trend

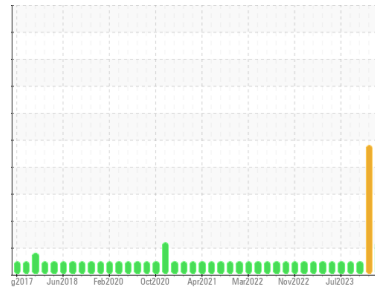

COOL CHEMICALS



Area
(YA133469)

Machine Id
2638C

Component
Natural Gas Engine

Fluid
PETRO CANADA DURON GEO LD 15W40 (38 GAL)

DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. Oil and filter change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels remain high.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		GFL0111031	GFL0111044	GFL0098520
Sample Date	Client Info		01 Apr 2024	19 Mar 2024	18 Dec 2023
Machine Age	hrs	Client Info	16688	16597	16023
Oil Age	hrs	Client Info	665	574	475
Oil Changed	Client Info		Changed	Not Changd	Changed
Sample Status			ABNORMAL	ABNORMAL	NORMAL

CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.1	NEG	NEG	NEG

WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >50	13	▲ 42	11
Chromium	ppm	ASTM D5185m >4	1	▲ 6	2
Nickel	ppm	ASTM D5185m >2	0	1	<1
Titanium	ppm	ASTM D5185m	0	<1	<1
Silver	ppm	ASTM D5185m >3	0	0	0
Aluminum	ppm	ASTM D5185m >9	5	▲ 14	2
Lead	ppm	ASTM D5185m >30	3	20	2
Copper	ppm	ASTM D5185m >35	<1	6	3
Tin	ppm	ASTM D5185m >4	<1	2	<1
Vanadium	ppm	ASTM D5185m	0	0	0
Cadmium	ppm	ASTM D5185m	0	0	<1

ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 50	29	5	17
Barium	ppm	ASTM D5185m 5	0	0	10
Molybdenum	ppm	ASTM D5185m 50	82	165	57
Manganese	ppm	ASTM D5185m 0	<1	<1	<1
Magnesium	ppm	ASTM D5185m 560	556	620	558
Calcium	ppm	ASTM D5185m 1510	1489	1689	1580
Phosphorus	ppm	ASTM D5185m 780	766	803	743
Zinc	ppm	ASTM D5185m 870	916	1105	963
Sulfur	ppm	ASTM D5185m 2040	2776	2694	2270

CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >+100	9	16	5
Sodium	ppm	ASTM D5185m	▲ 947	▲ 2567	6
Potassium	ppm	ASTM D5185m >20	6	▲ 24	2

INFRA-RED

	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	0.1	0.1	0
Nitration	Abs/cm	*ASTM D7624 >20	9.3	16.0	9.7
Sulfation	Abs/.1mm	*ASTM D7415 >30	20.1	25.8	20.9


FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	16.7	20.0	18.1
Base Number (BN)	mg KOH/g	ASTM D2896 10.2	11.0	12.2	5.2




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

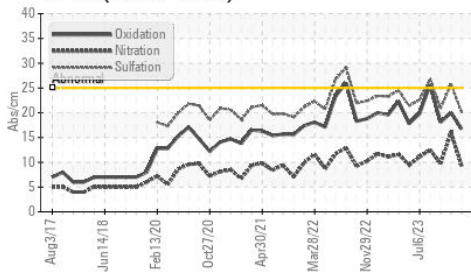


Glycol Contamination

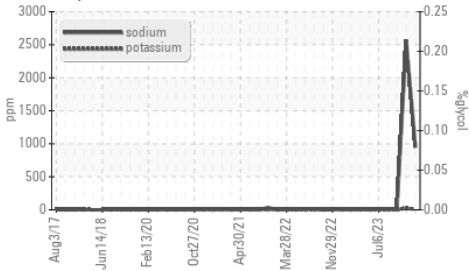

Viscosity @ 100°C

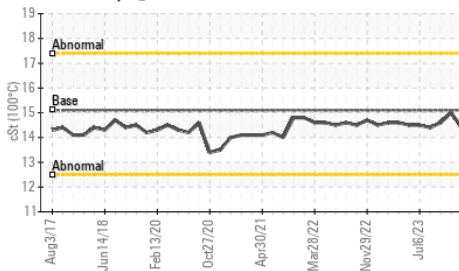

Glycol Contamination

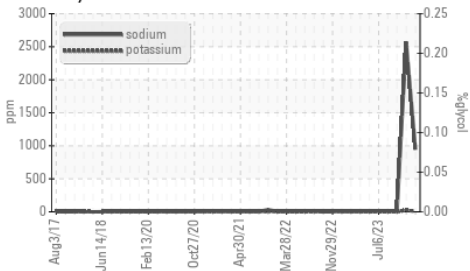


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.1	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.1	14.4	15.0

GRAPHS


Ferrous Alloys

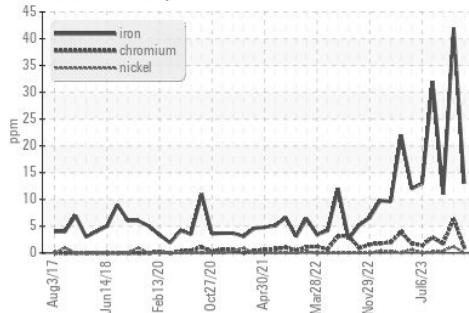


Non-ferrous Metals

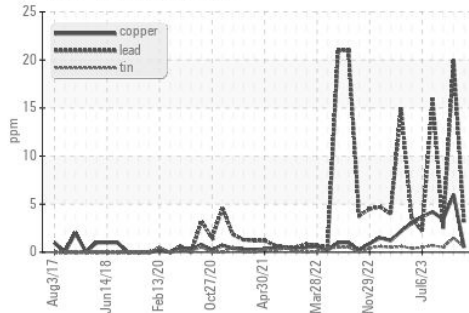

Viscosity @ 100°C

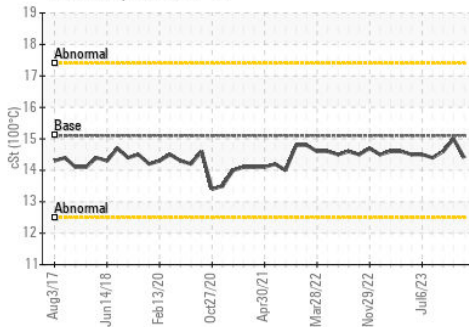

Base Number

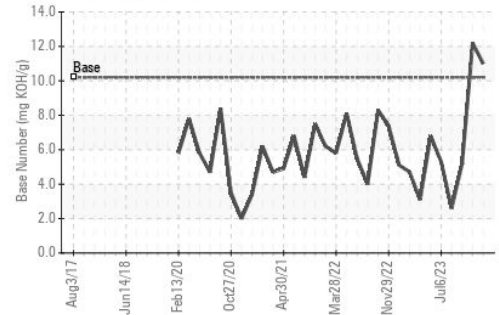

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0111031

Lab Number : 06137068

Unique Number : 10956533

Test Package : FLEET (Additional Tests: Glycol)

Received : 03 Apr 2024

Tested : 05 Apr 2024

Diagnosed : 05 Apr 2024 - Jonathan Hester

GFL Environmental - 006 - Wilmington

3618 US Highway 421 N

Wilmington, NC

US 28401

Contact: Eric Wood

eric.wood@gflenv.com

T: (717)723-1956

F: (910)762-6880

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)