


OIL ANALYSIS REPORT

K5 CONSTRUCTION CORPORATION - HODGKINS IL

4362

Diesel Engine

GASOLINE ENGINE OIL SAE 5W40 (4 hrs)





DIAGNOSIS

Recommendation

We advise that you check the fuel injection system. The oil change at the time of sampling has been noted. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

There is a high amount of fuel present in the oil. Tests confirm the presence of fuel in the oil.


Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. Fuel is present in the oil and is lowering the viscosity. The oil is no longer serviceable due to the presence of contaminants.

SAMPLE INFOR	MATION	method	limit/base	current	history1	history2
Sample Number		Client Info		PCA0122084	LW0008570	LW0008417
Sample Date		Client Info		28 Mar 2024	10 Jan 2024	27 Oct 2023
Machine Age	hrs	Client Info		8040	7720	7405
Oil Age	hrs	Client Info		320	315	335
Oil Changed		Client Info		Changed	Changed	Changed
Sample Status				SEVERE	NORMAL	NORMAL
CONTAMINAT	ION	method	limit/base	current	history1	history2
Water		WC Method	>0.2	NEG	NEG	NEG
Glycol		WC Method		NEG	NEG	NEG
WEAR METAL	S	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>100	13	14	23
Chromium	ppm	ASTM D5185m	>20	0	<1	<1
Nickel	ppm	ASTM D5185m	>4	0	0	<1
Titanium	ppm	ASTM D5185m		81	78	92
Silver	ppm	ASTM D5185m	>3	0	0	0
Aluminum	ppm	ASTM D5185m	>20	2	3	4
Lead	ppm	ASTM D5185m	>40	0	0	0
Copper	ppm	ASTM D5185m	>330	<1	1	2
Tin	ppm	ASTM D5185m	>15	<1	0	<1
Vanadium	ppm	ASTM D5185m		<1	1	<1
Cadmium	ppm	ASTM D5185m		0	0	<1
ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	75	52	50	37
Barium	ppm	ASTM D5185m	5	0	0	<1
Molybdenum	ppm	ASTM D5185m	100	0	1	1
Manganese	ppm	ASTM D5185m		<1	0	0
Magnesium	ppm	ASTM D5185m	12	662	651	701
Calcium		HOOTIGUIN DO TOOIII				
Calcium		ASTM D5185m	2100	1180	1171	1236
	ppm		2100 650	1180 919	1171 939	
Phosphorus Zinc	ppm	ASTM D5185m				1236
Phosphorus	ppm	ASTM D5185m ASTM D5185m	650	919	939	1236 1011
Phosphorus Zinc	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m	650 850	919 1059	939 1070	1236 1011 1191
Phosphorus Zinc Sulfur	ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	650 850 2500	919 1059 3626	939 1070 3248	1236 1011 1191 3856
Phosphorus Zinc Sulfur CONTAMINAN	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method	650 850 2500 limit/base	919 1059 3626 current	939 1070 3248 history1	1236 1011 1191 3856 history2
Phosphorus Zinc Sulfur CONTAMINAN Silicon	ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m	650 850 2500 limit/base	919 1059 3626 current	939 1070 3248 history1	1236 1011 1191 3856 history2
Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium	ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m	650 850 2500 limit/base >25 >20	919 1059 3626 current 11	939 1070 3248 history1 11	1236 1011 1191 3856 history2 16
Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D5185m	650 850 2500 limit/base >25 >20	919 1059 3626 current 11 3	939 1070 3248 history1 11 3	1236 1011 1191 3856 history2 16 6 4
Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium Fuel	ppm ppm ppm ppm ppm ppm ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D3524	650 850 2500 limit/base >25 >20 >5	919 1059 3626	939 1070 3248 history1 11 3 3 <1.0	1236 1011 1191 3856 history2 16 6 4 <1.0
Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium Fuel INFRA-RED	ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m	650 850 2500 limit/base >25 >20 >5 limit/base >3	919 1059 3626 current 11 3 2 ▲ 9.0 current 0.4	939 1070 3248 history1 11 3 3 <1.0 history1	1236 1011 1191 3856 history2 16 6 4 <1.0 history2
Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium Fuel INFRA-RED Soot %	ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D3524 method *ASTM D7844	650 850 2500 limit/base >25 >20 >5 limit/base >3	919 1059 3626 current 11 3 2 ▲ 9.0	939 1070 3248 history1 11 3 3 <1.0	1236 1011 1191 3856 history2 16 6 4 <1.0
Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration	ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D3524 Method *ASTM D7844 *ASTM D7624 *ASTM D76145	650 850 2500 limit/base >25 >20 >5 limit/base >3 >20	919 1059 3626 current 11 3 2 ▲ 9.0 current 0.4 11.4	939 1070 3248 history1 11 3 3 <1.0 history1 0.6 11.3	1236 1011 1191 3856 history2 16 6 4 <1.0 history2 0.8
Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration Sulfation FLUID DEGRAI	ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D3524 Method *ASTM D7844 *ASTM D7624 *ASTM D7415 Method	650 850 2500 limit/base >25 >20 >5 limit/base >3 >20 >30 limit/base	919 1059 3626 current 11 3 2 ▲ 9.0 current 0.4 11.4 23.0 current	939 1070 3248 history1 11 3 3 <1.0 history1 0.6 11.3 22.9 history1	1236 1011 1191 3856 history2 16 6 4 <1.0 history2 0.8 11.9 26.9
Phosphorus Zinc Sulfur CONTAMINAN Silicon Sodium Potassium Fuel INFRA-RED Soot % Nitration Sulfation	ppm	ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m Method ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D5185m ASTM D3524 Method *ASTM D7844 *ASTM D7624 *ASTM D76145	650 850 2500 limit/base >25 >20 >5 limit/base >3 >20 >3	919 1059 3626 current 11 3 2 ▲ 9.0 current 0.4 11.4 23.0	939 1070 3248 history1 11 3 3 <1.0 history1 0.6 11.3 22.9	1236 1011 1191 3856 history2 16 6 4 <1.0 history2 0.8 11.9 26.9



OIL ANALYSIS REPORT

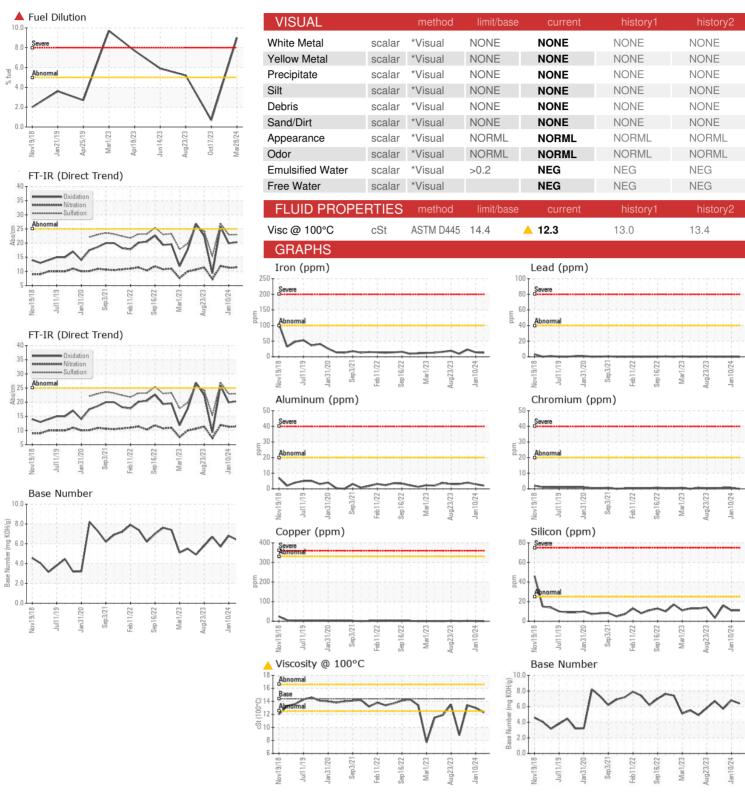





Certificate 12367

Sample No.

Laboratory

: PCA0122084 Lab Number : 06137100

: WearCheck USA - 501 Madison Ave., Cary, NC 27513 Received **Tested**

Unique Number : 10956565 Diagnosed : 05 Apr 2024 - Wes Davis Test Package : MOB 1 (Additional Tests: FuelDilution, PercentFuel, TBN)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

 st - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

K5 CONSTRUCTION CORPORATION

6301 S EAST AVENUE HODGKINS, IL

US 60525 Contact: Dave Gorski daveg@k-five.net T: (630)257-5600

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

: 03 Apr 2024

: 05 Apr 2024

F: