




# OIL ANALYSIS REPORT

Sample Rating Trend

**NORMAL**



Area  
**GFL415**  
 Machine Id  
**727163**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (--- LTR)**

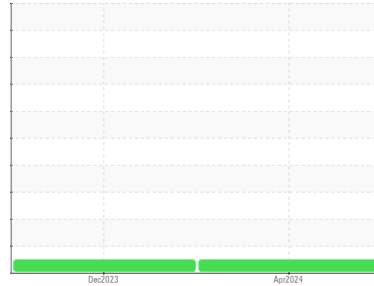

## DIAGNOSIS

### Recommendation

Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0117638</b>	GFL0105847	---
Sample Date	Client Info		<b>01 Apr 2024</b>	20 Dec 2023	---
Machine Age	hrs	Client Info	<b>16420</b>	650	---
Oil Age	hrs	Client Info	<b>650</b>	650	---
Oil Changed	Client Info		<b>Not Chngd</b>	Not Chngd	---
Sample Status			<b>NORMAL</b>	NORMAL	---

## CONTAMINATION

	method	limit/base	current	history1	history2
Fuel	WC Method	>5	<b>&lt;1.0</b>	<1.0	---
Water	WC Method	>0.2	<b>NEG</b>	NEG	---
Glycol	WC Method		<b>NEG</b>	NEG	---

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >80	<b>6</b>	0	---
Chromium	ppm	ASTM D5185m >5	<b>0</b>	0	---
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	---
Titanium	ppm	ASTM D5185m	<b>0</b>	0	---
Silver	ppm	ASTM D5185m >3	<b>0</b>	0	---
Aluminum	ppm	ASTM D5185m >30	<b>2</b>	<1	---
Lead	ppm	ASTM D5185m >30	<b>0</b>	0	---
Copper	ppm	ASTM D5185m >150	<b>&lt;1</b>	<1	---
Tin	ppm	ASTM D5185m >5	<b>0</b>	0	---
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	---
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	---

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>1</b>	4	---
Barium	ppm	ASTM D5185m 0	<b>0</b>	0	---
Molybdenum	ppm	ASTM D5185m 60	<b>62</b>	59	---
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	---
Magnesium	ppm	ASTM D5185m 1010	<b>1028</b>	949	---
Calcium	ppm	ASTM D5185m 1070	<b>1138</b>	1035	---
Phosphorus	ppm	ASTM D5185m 1150	<b>1112</b>	1129	---
Zinc	ppm	ASTM D5185m 1270	<b>1347</b>	1287	---
Sulfur	ppm	ASTM D5185m 2060	<b>3951</b>	3242	---

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >20	<b>2</b>	5	---
Sodium	ppm	ASTM D5185m	<b>3</b>	2	---
Potassium	ppm	ASTM D5185m >20	<b>2</b>	<1	---

## INFRA-RED



	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.2</b>	0	---
Nitration	Abs/cm	*ASTM D7624 >20	<b>5.9</b>	4.2	---
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>18.2</b>	17.2	---

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>14.4</b>	12.8	---
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>8.9</b>	9.2	---







# OIL ANALYSIS REPORT

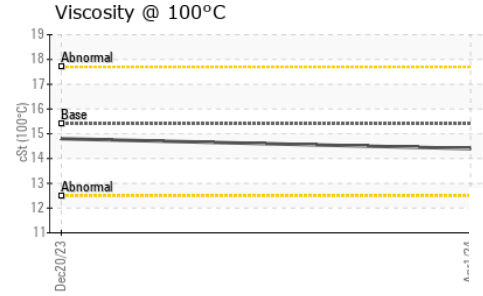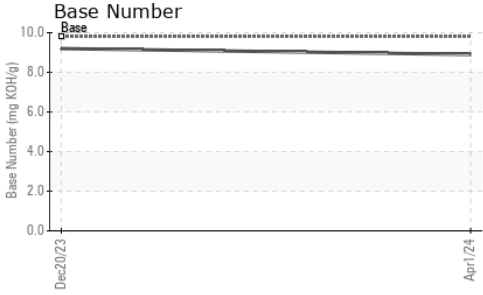

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	---
Yellow Metal	scalar	*Visual	NONE	NONE	---
Precipitate	scalar	*Visual	NONE	NONE	---
Silt	scalar	*Visual	NONE	NONE	---
Debris	scalar	*Visual	NONE	NONE	---
Sand/Dirt	scalar	*Visual	NONE	NONE	---
Appearance	scalar	*Visual	NORML	NORML	---
Odor	scalar	*Visual	NORML	NORML	---
Emulsified Water	scalar	*Visual	>0.2	NEG	---
Free Water	scalar	*Visual		NEG	---

FLUID PROPERTIES	method	limit/base	current	history1	history2	
Visc @ 100°C	cSt	ASTM D445	15.4	<b>14.4</b>	14.8	---

## GRAPHS

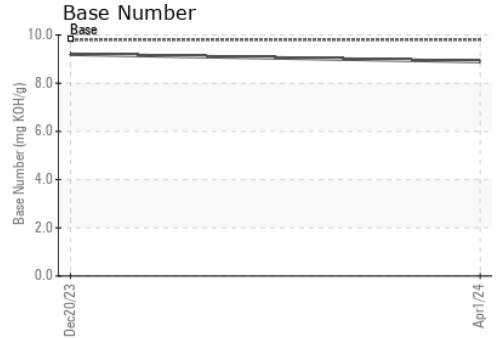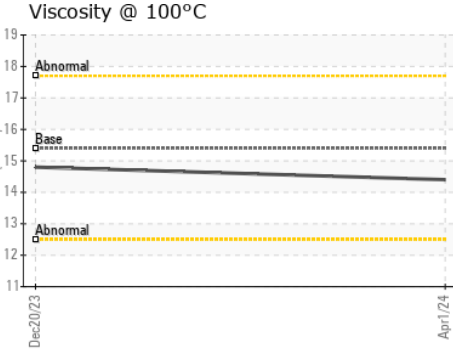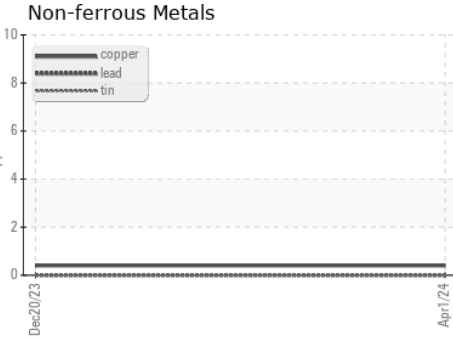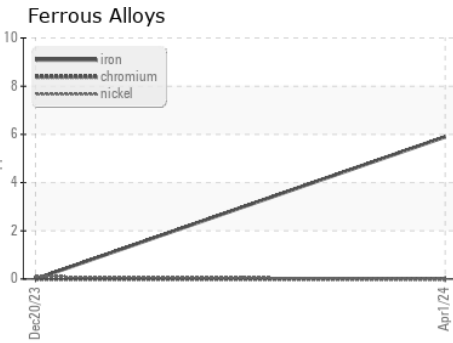

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0117638 **Received** : 03 Apr 2024  
**Lab Number** : **06137138** **Tested** : 04 Apr 2024  
**Unique Number** : 10956603 **Diagnosed** : 04 Apr 2024 - Wes Davis  
**Test Package** : FLEET

**GFL Environmental - 415 - Michigan East**  
 6200 Elmridge  
 Sterling Heights, MI  
 US 48313  
 Contact: Frank Wolak  
 fwolak@gflenv.com  
 T: (586)825-9514  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)