




# OIL ANALYSIS REPORT

Sample Rating Trend

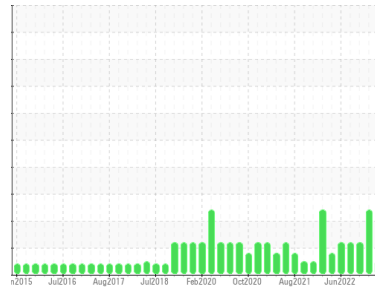

**NORMAL**



Area  
**(YA110711) GFL035**  
 Machine Id  
**2407**  
 Component  
**Diesel Engine**  
 Fluid  
**PETRO CANADA DURON SHP 15W40 (11 GAL)**

## DIAGNOSIS

### Recommendation

No corrective action is recommended at this time. Resample at the next service interval to monitor.

### Wear

All component wear rates are normal.

### Contamination

Fuel content negligible. There is no indication of any contamination in the oil.

### Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil. The condition of the oil is suitable for further service.

## SAMPLE INFORMATION

	method	limit/base	current	history1	history2
Sample Number	Client Info		<b>GFL0116439</b>	GFL0071627	GFL0061717
Sample Date	Client Info		<b>01 Apr 2024</b>	10 Oct 2023	31 Jan 2023
Machine Age	mls	Client Info	<b>122860</b>	122860	122860
Oil Age	mls	Client Info	<b>600</b>	600	600
Oil Changed	Client Info		<b>Not Chngd</b>	Changed	Changed
Sample Status			<b>NORMAL</b>	SEVERE	ABNORMAL

## CONTAMINATION

	method	limit/base	current	history1	history2
Water	WC Method	>0.2	<b>NEG</b>	NEG	NEG
Glycol	WC Method		<b>NEG</b>	NEG	NEG

## WEAR METALS

	method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m >100	<b>&lt;1</b>	9	27
Chromium	ppm	ASTM D5185m >20	<b>0</b>	<1	<1
Nickel	ppm	ASTM D5185m >2	<b>0</b>	<1	<1
Titanium	ppm	ASTM D5185m	<b>0</b>	0	<1
Silver	ppm	ASTM D5185m >2	<b>0</b>	0	0
Aluminum	ppm	ASTM D5185m >25	<b>&lt;1</b>	0	17
Lead	ppm	ASTM D5185m >40	<b>0</b>	<1	0
Copper	ppm	ASTM D5185m >330	<b>0</b>	2	4
Tin	ppm	ASTM D5185m >15	<b>0</b>	<1	<1
Vanadium	ppm	ASTM D5185m	<b>&lt;1</b>	0	0
Cadmium	ppm	ASTM D5185m	<b>0</b>	0	0

## ADDITIVES

	method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m 0	<b>&lt;1</b>	3	4
Barium	ppm	ASTM D5185m 0	<b>0</b>	2	0
Molybdenum	ppm	ASTM D5185m 60	<b>60</b>	59	60
Manganese	ppm	ASTM D5185m 0	<b>0</b>	<1	<1
Magnesium	ppm	ASTM D5185m 1010	<b>995</b>	827	815
Calcium	ppm	ASTM D5185m 1070	<b>1159</b>	997	1090
Phosphorus	ppm	ASTM D5185m 1150	<b>1114</b>	940	934
Zinc	ppm	ASTM D5185m 1270	<b>1361</b>	1142	1168
Sulfur	ppm	ASTM D5185m 2060	<b>4073</b>	3193	3119

## CONTAMINANTS

	method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m >25	<b>4</b>	5	10
Sodium	ppm	ASTM D5185m	<b>&lt;1</b>	<1	4
Potassium	ppm	ASTM D5185m >20	<b>0</b>	4	7
Fuel	%	ASTM D3524 >6.0	<b>0.7</b>	▲ 9.0	▲ 5.0

## INFRA-RED





	method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844 >3	<b>0.1</b>	0.2	0.3
Nitration	Abs/cm	*ASTM D7624 >20	<b>4.5</b>	8.1	9.2
Sulfation	Abs/.1mm	*ASTM D7415 >30	<b>17.0</b>	18.0	18.6

## FLUID DEGRADATION

	method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414 >25	<b>12.8</b>	14.5	14.8
Base Number (BN)	mg KOH/g	ASTM D2896 9.8	<b>9.3</b>	7.8	6.6







# OIL ANALYSIS REPORT

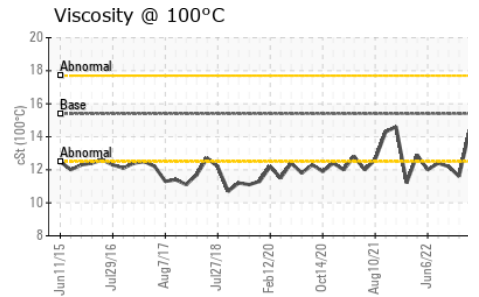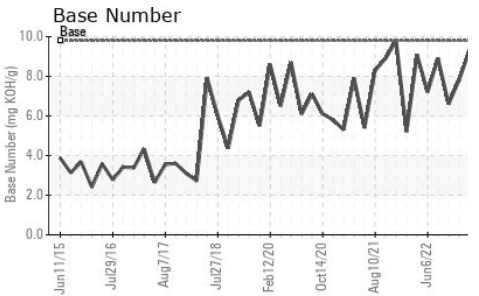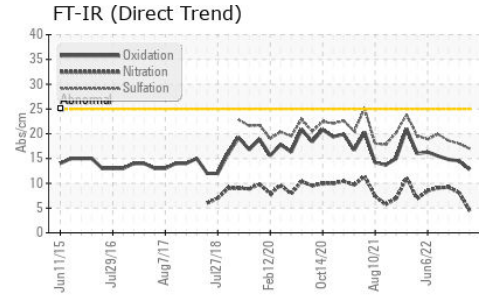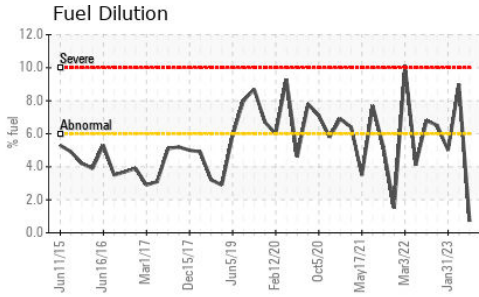

VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG

FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.4	▲ 11.6 ▲ 12.2

## GRAPHS

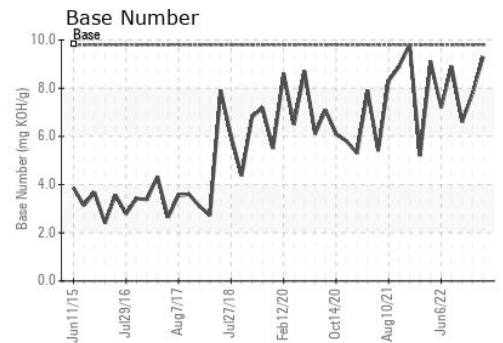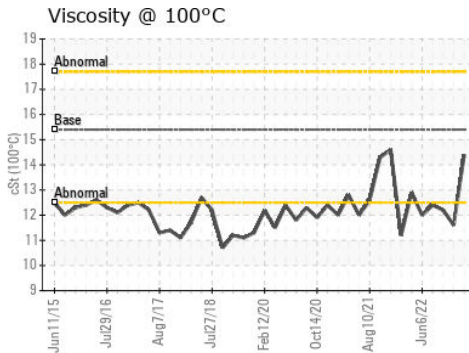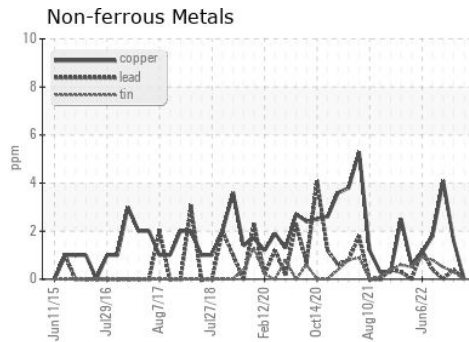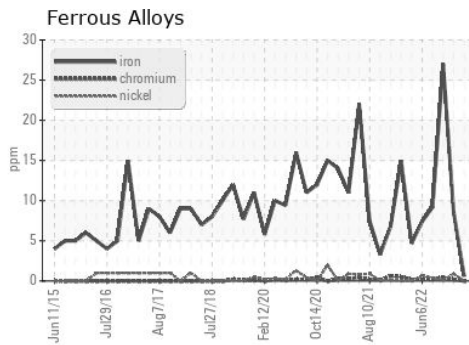

Certificate L2367

**Laboratory** : WearCheck USA - 501 Madison Ave., Cary, NC 27513  
**Sample No.** : GFL0116439 **Received** : 03 Apr 2024  
**Lab Number** : 06137231 **Tested** : 05 Apr 2024  
**Unique Number** : 10956696 **Diagnosed** : 05 Apr 2024 - Wes Davis  
**Test Package** : FLEET ( Additional Tests: PercentFuel )

**GFL Environmental - 035 - Greensboro**  
 1236 Elon Place  
 High Point, NC  
 US 27263  
 Contact: JORGE COSTA  
 jorge.costa@gflenv.com  
 T: (336)668-3712  
 F:

To discuss this sample report, contact Customer Service at 1-800-237-1369.

\* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)