




OIL ANALYSIS REPORT

Area
GFL035
 Machine Id
12065
 Component
Diesel Engine
 Fluid
PETRO CANADA DURON SHP 15W40 (32 QTS)

Sample Rating Trend

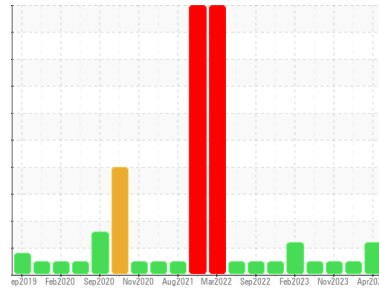

GLYCOL



DIAGNOSIS

Recommendation

We advise that you check for the source of the coolant leak. Check for low coolant level. We recommend an early resample to monitor this condition.

Wear

All component wear rates are normal.

Contamination

Sodium and/or potassium levels are high.

Fluid Condition

The BN result indicates that there is suitable alkalinity remaining in the oil.

SAMPLE INFORMATION		method	limit/base	current	history1	history2
Sample Number	Client Info			GFL0116450	GFL0102361	GFL0085154
Sample Date	Client Info			01 Apr 2024	07 Feb 2024	09 Nov 2023
Machine Age	hrs	Client Info		1854	1854	1854
Oil Age	hrs	Client Info		600	600	600
Oil Changed	Client Info			Not Chngd	Not Chngd	Changed
Sample Status				ABNORMAL	NORMAL	NORMAL

CONTAMINATION		method	limit/base	current	history1	history2
Fuel	WC Method	>3.0		<1.0	<1.0	<1.0
Water	WC Method	>0.2		NEG	NEG	NEG

WEAR METALS		method	limit/base	current	history1	history2
Iron	ppm	ASTM D5185m	>75	20	18	32
Chromium	ppm	ASTM D5185m	>5	2	<1	1
Nickel	ppm	ASTM D5185m	>4	<1	0	1
Titanium	ppm	ASTM D5185m	>2	0	<1	<1
Silver	ppm	ASTM D5185m	>2	0	0	0
Aluminum	ppm	ASTM D5185m	>15	2	2	3
Lead	ppm	ASTM D5185m	>25	0	0	3
Copper	ppm	ASTM D5185m	>100	10	1	1
Tin	ppm	ASTM D5185m	>4	0	<1	<1
Vanadium	ppm	ASTM D5185m		<1	<1	0
Cadmium	ppm	ASTM D5185m		0	0	0

ADDITIVES		method	limit/base	current	history1	history2
Boron	ppm	ASTM D5185m	0	<1	4	13
Barium	ppm	ASTM D5185m	0	0	0	0
Molybdenum	ppm	ASTM D5185m	60	59	63	64
Manganese	ppm	ASTM D5185m	0	0	<1	<1
Magnesium	ppm	ASTM D5185m	1010	961	1026	903
Calcium	ppm	ASTM D5185m	1070	1179	1200	1563
Phosphorus	ppm	ASTM D5185m	1150	1094	1102	1127
Zinc	ppm	ASTM D5185m	1270	1346	1372	1336
Sulfur	ppm	ASTM D5185m	2060	4021	3229	2863

CONTAMINANTS		method	limit/base	current	history1	history2
Silicon	ppm	ASTM D5185m	>25	8	7	13
Sodium	ppm	ASTM D5185m		17	4	4
Potassium	ppm	ASTM D5185m	>20	▲ 222	3	2
Glycol	%	*ASTM D2982		NEG	NEG	NEG


INFRA-RED		method	limit/base	current	history1	history2
Soot %	%	*ASTM D7844	>6	0.1	0.2	0.6
Nitration	Abs/cm	*ASTM D7624	>20	5.1	8.2	11.1
Sulfation	Abs/.1mm	*ASTM D7415	>30	17.8	20.1	22.6

FLUID DEGRADATION		method	limit/base	current	history1	history2
Oxidation	Abs/.1mm	*ASTM D7414	>25	13.1	17.0	21.6
Base Number (BN)	mg KOH/g	ASTM D2896	9.8	9.2	8.8	8.6




OIL ANALYSIS REPORT


FT-IR (Direct Trend)

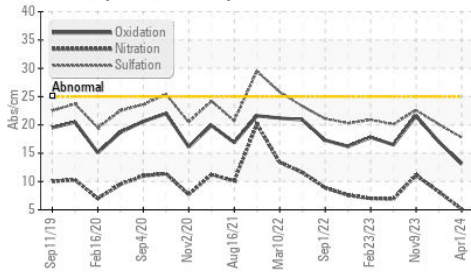


Glycol Contamination

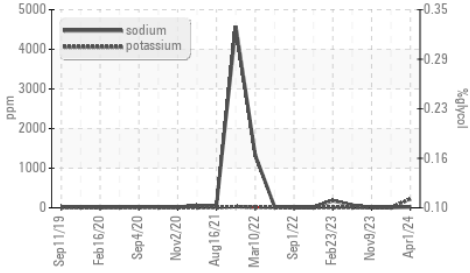


Viscosity @ 100°C

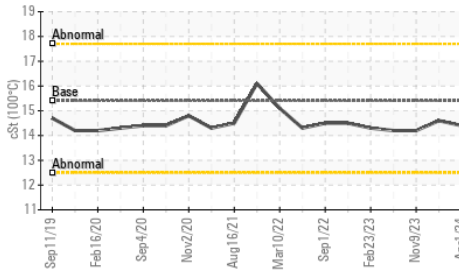

Glycol Contamination

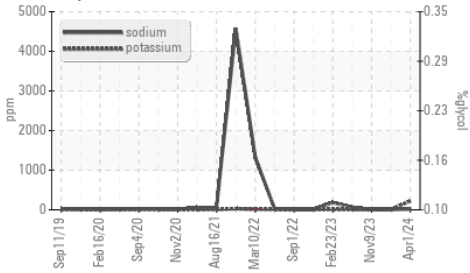

Viscosity @ 100°C

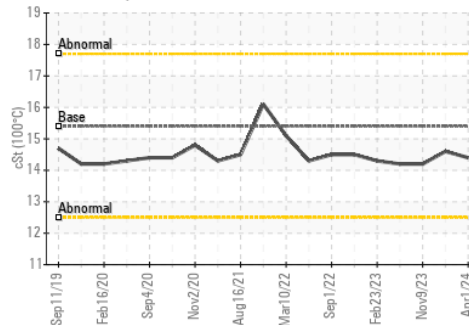


VISUAL	method	limit/base	current	history1	history2
White Metal	scalar	*Visual	NONE	NONE	NONE
Yellow Metal	scalar	*Visual	NONE	NONE	NONE
Precipitate	scalar	*Visual	NONE	NONE	NONE
Silt	scalar	*Visual	NONE	NONE	NONE
Debris	scalar	*Visual	NONE	NONE	NONE
Sand/Dirt	scalar	*Visual	NONE	NONE	NONE
Appearance	scalar	*Visual	NORML	NORML	NORML
Odor	scalar	*Visual	NORML	NORML	NORML
Emulsified Water	scalar	*Visual	>0.2	NEG	NEG
Free Water	scalar	*Visual		NEG	NEG


FLUID PROPERTIES	method	limit/base	current	history1	history2
Visc @ 100°C	cSt	ASTM D445	15.4	14.4	14.6

GRAPHS


Ferrous Alloys

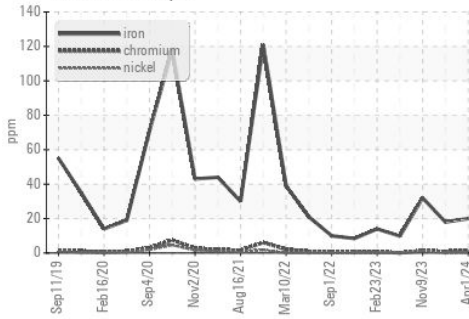


Non-ferrous Metals

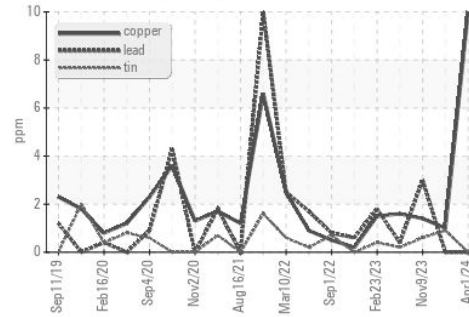


Viscosity @ 100°C

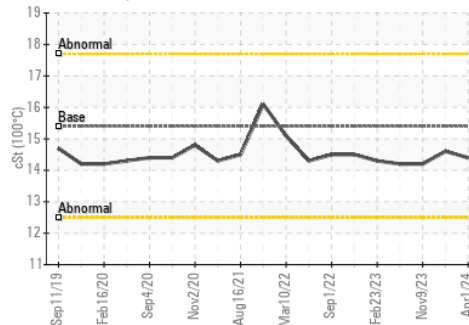

Particle Count

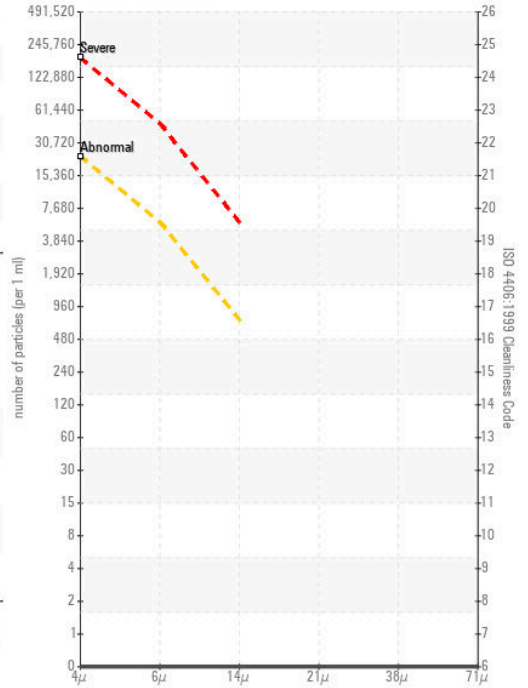

Base Number

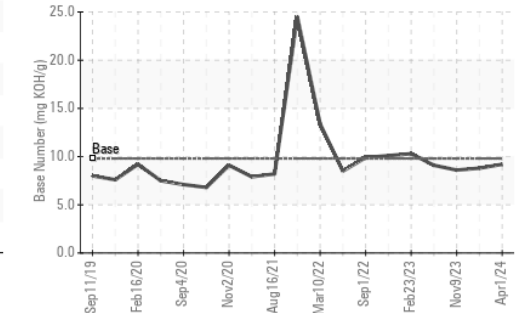

Certificate L2367

Laboratory : WearCheck USA - 501 Madison Ave., Cary, NC 27513

Sample No. : GFL0116450

Lab Number : 06137256

Unique Number : 10956721

Test Package : FLEET (Additional Tests: Glycol, PrtCount)

To discuss this sample report, contact Customer Service at 1-800-237-1369.

* - Denotes test methods that are outside of the ISO 17025 scope of accreditation.

Statements of conformity to specifications are based on the simple acceptance decision rule (JCGM 106:2012)

Received : 03 Apr 2024

Tested : 08 Apr 2024

Diagnosed : 08 Apr 2024 - Jonathan Hester

GFL Environmental - 035 - Greensboro

1236 Elon Place

High Point, NC

US 27263

Contact: JORGE COSTA

jorge.costa@gflenv.com

T: (336)668-3712

F: